


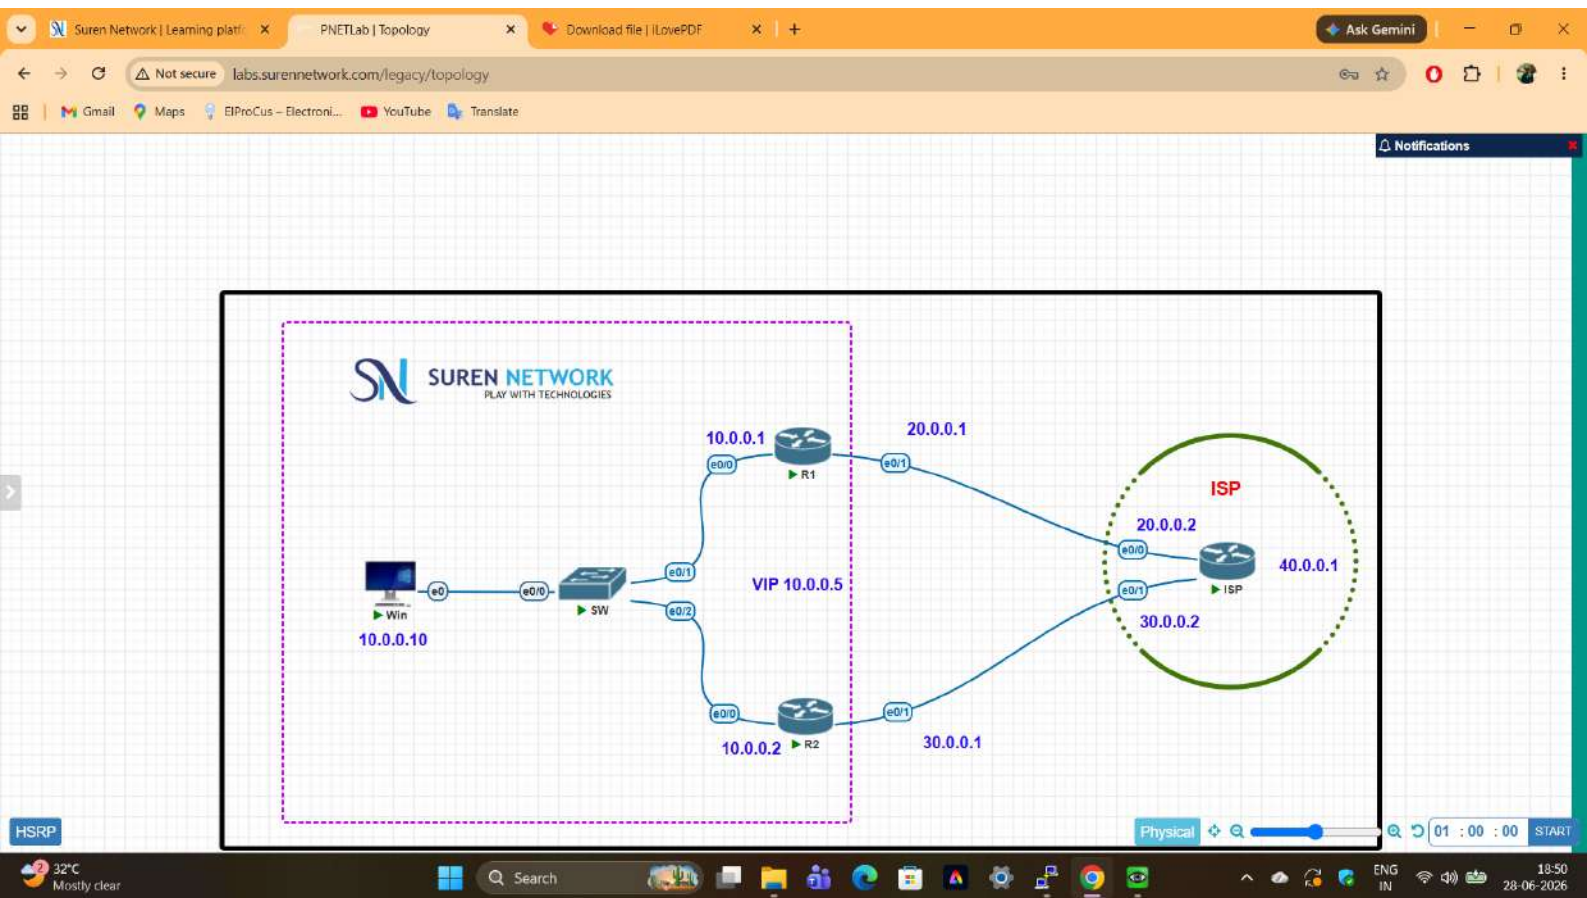

Screenshot of a network simulation environment (PNETLab) showing a terminal window and a network topology diagram.

Terminal Window (R2):

```
R2(config)#int e0/0
R2(config-if)#standby 1 ip 10.0.0.5
R2(config-if)#exit
R2(config)#
*Jun 28 13:17:12.821: %HSRP-5-STATECHANGE: Ethernet0/0 Grp 1 state Standby -> Active
R2(config)#exit
R2#sh
*Jun 28 13:20:45.559: %SYS-5-CONFIG_I: Configured from console by console
R2#sh standby
Ethernet0/0 - Group 1
State is Active
  2 state changes, last state change 00:03:39
Virtual IP address is 10.0.0.5
Active virtual MAC address is 0000.0c07.ac01
Local virtual MAC address is 0000.0c07.ac01 (v1 default)
Hello time 3 sec, hold time 10 sec
Next hello sent in 0.240 secs
Preemption disabled
Active router is local
Standby router is 10.0.0.1, priority 100 (expires in 9.264 sec)
Priority 100 (default 100)
Group name is "hsrp-Et0/0-1" (default)
R2#
```

Network Topology Diagram:

- Win:** A host with IP 10.0.0.10 connected to a switch (SW).
- SW:** A switch connected to R1 and R2.
- R1:** Router 1 with IP 0.0.0.1 on e0/0 and 20.0.0.1 on e0/1.
- R2:** Router 2 with IP 10.0.0.2 on e0/0 and 30.0.0.1 on e0/1.
- VIP:** Virtual IP 10.0.0.5 is configured on the R1/R2 link.
- ISP:** A cloud representing the Internet Service Provider, containing a router with IP 40.0.0.1. It is connected to R1 (20.0.0.2) and R2 (30.0.0.2).

The diagram shows a network setup for HSRP (Hot Standby Router Protocol) on a link between R1 and R2. The active router is R2, and the virtual IP is 10.0.0.5. The network is connected to an ISP cloud.

Suren Network | Learning platform | PNETLab | Topology | Download file | iLovePDF

R1

```
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#int e0/0
R1(config-if)#standby 1 ip 10.0.0.5
R1(config-if)#exit
R1(config)#exit
R1#sh
*Jun 28 13:17:33.943: %SYS-5-CONFIG_I: Configured from console by console
R1#sh standby
Ethernet0/0 - Group 1
  State is Speak
  Virtual IP address is 10.0.0.5
  Active virtual MAC address is 0000.0c07.ac01
  Local virtual MAC address is 0000.0c07.ac01 (vl default)
  Hello time 3 sec, hold time 10 sec
  Next hello sent in 1.856 secs
  Preemption disabled
  Active router is 10.0.0.2, priority 100 (expires in 10.000 sec)
  Standby router is unknown
  Priority 100 (default 100)
  Group name is "hsrp-Et0/0-1" (default)
R1#
*Jun 28 13:17:52.135: %HSRP-5-STATECHANGE: Ethernet0/0 Grp 1 state Speak -> Standby
R1#
```

HSRP

Physical 01 : 00 : 00 START

32°C Mostly clear

Search

ENG IN 18:51 28-06-2026

