


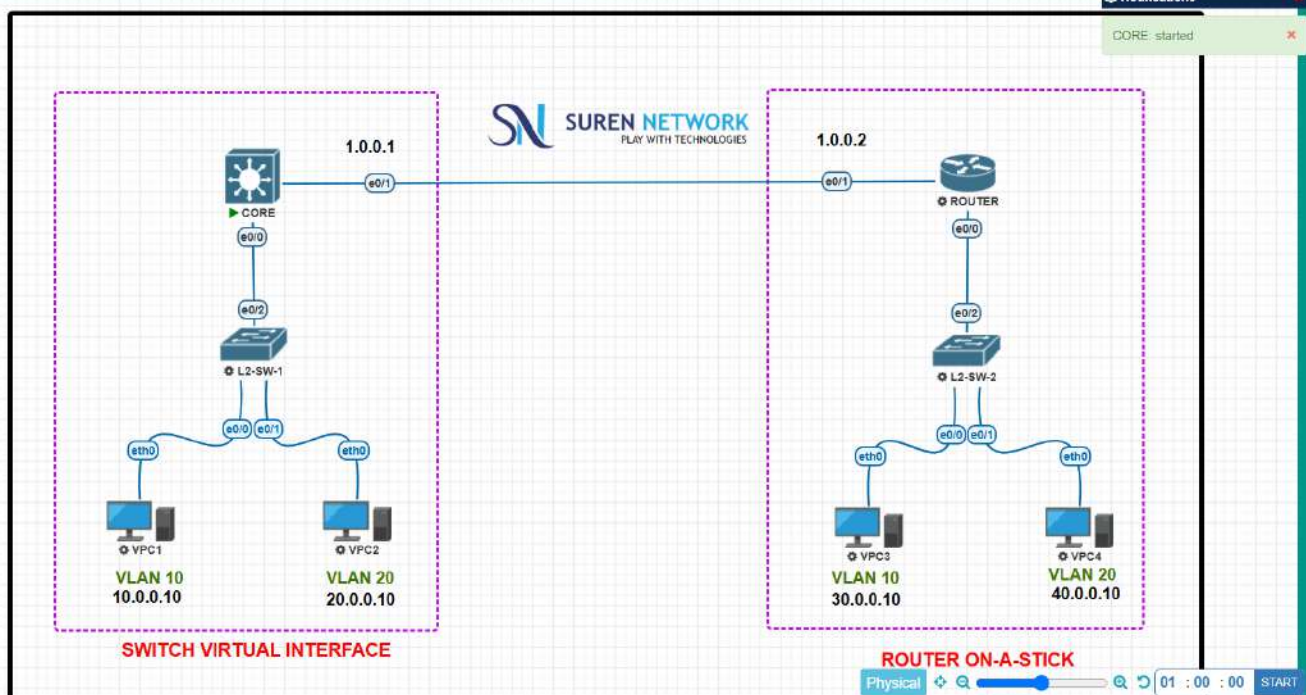

Browser tabs: (1004) EtherChannel or Port... | WhatsApp | PNETLab | Topology | Suren Network | Learning pla... | how to assign ip for the layer... | +

Address bar: Not secure | labs.surennetwork.com/legacy/topology

Browser extensions: Gmail, Maps, ElProCus - Electroni..., YouTube, Translate

Notifications

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

Terminal Output:

```
L2-SW-1
L2-SW-1(config)#exit
L2-SW-1#sh
*Jun 24 11:34:13.363: %SYS-5-CONFIG_I: Configured from console by console
L2-SW-1#sh vlan brief
```

VLAN Name	Status	Ports
1	default	active Et0/3
10	aa	active Et0/0
20	bb	active Et0/1
1002	fdi-default	act/unsup
1003	token-ring-default	act/unsup
1004	rdinet-default	act/unsup
1005	trnet-default	act/unsup

```
L2-SW-1#sh interface trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Et0/2	on	802.1q	trunking	1

```
Port
Et0/2
Vlans allowed on trunk
1-4094
Vlans allowed and active in management domain
1,10,20
```

Physical | 01 : 00 : 00 | START

36°C Mostly cloudy | Search | 17:39 24-06-2026

Browser tabs: (1004) EtherChannel or PortC... x WhatsApp x PNETLab | Topology x Suren Network | Learning pla... x how to assign ip for the layer... x

Address bar: Not secure labs.surennetwork.com/legacy/topology

Notifications

```
1, changed state to up
CORE(config-if)#ip add 1.0.0.1 255.0.0.0
CORE(config-if)#no sh
CORE(config-if)#exit
CORE(config)#exit
CORE#sh
*Jun 24 12:04:23.618: %SYS-5-CONFIG_I: Configured from console by console
CORE#sh ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
Ethernet0/0    unassigned      YES unset    up          up
Ethernet0/1    1.0.0.1         YES manual  up          up
Ethernet0/2    unassigned      YES unset    down        down
Ethernet0/3    unassigned      YES unset    down        down
Vlan10         10.0.0.1       YES manual  up          up
Vlan20         20.0.0.1       YES manual  up          up
CORE#conf t
Enter configuration commands, one per line. End with CNTL/Z.
CORE(config)#ip route 0.0.0.0 0.0.0.0 1.0.0.2
CORE(config)#exit
CORE#sh
*Jun 24 12:07:51.733: %SYS-5-CONFIG_I: Configured from console by console
CORE#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
```

SWITCH VIRTUAL INTERFACE

ROUTER ON-A-STICK

Physical + - 01 : 00 : 00 START

Interview

36°C Mostly cloudy

Search

ENG IN 17:39 24-06-2026

Browser tabs: (1004) EtherChannel or PortC... x WhatsApp x PNETLab | Topology x Suren Network | Learning pla... x how to assign ip for the layer... x

Address bar: Not secure labs.surennetwork.com/legacy/topology

Notifications

ROUTER

```
ROUTER(config-subif)#ip add 40.0.0.1 255.0.0.0
ROUTER(config-subif)#no sh
ROUTER(config-subif)#exit
ROUTER(config)#exit
ROUTER#sh ip
*Jun 24 11:55:43.769: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#sh ip interface brief
Interface            IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0          unassigned      YES TFTP  up          up
Ethernet0/0.1        30.0.0.1        YES manual up          up
Ethernet0/0.2        40.0.0.1        YES manual up          up
Ethernet0/1          unassigned      YES TFTP  up          up
Ethernet0/2          unassigned      YES TFTP  down        down
Ethernet0/3          unassigned      YES TFTP  down        down

ROUTER#conf t
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#int e0/1
```

SWITCH VIRTUAL INTERFACE

VLAN 10
10.0.0.10

VLAN 20
20.0.0.10

ROUTER ON-A-STICK

1.0.0.2

ROUTER

L2-SW-2

VLAN 10
30.0.0.10

VLAN 20
40.0.0.10

Browser tabs: (1004) EtherChannel or Port... | WhatsApp | PNETLab | Topology | Suren Network | Learning pla... | how to assign ip for the layer... |

Browser address bar: Not secure | labs.surennetwork.com/legacy/topology

Terminal Window 1 (L2-SW-2):

```
L2-SW-2#sh trunk
% Invalid input detected at '^' marker.

L2-SW-2#sh interface trunk

Port      Mode      Encapsulation  Status      Native vlan
-----
Et0/23    on        802.1q         trunking    1

Port      Vlans allowed on trunk
-----
Et0/23    1-4094

Port      Vlans allowed and active in management domain
-----
Et0/23    1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
-----
Et0/23    1,10,20

L2-SW-2#
```

Terminal Window 2:

```
%SYS-5-CONFIG_I: Configured from console by console

Status      Ports
-----
active      Et0/3
active      Et0/0
active      Et0/1
act/unsup   Et0/23
act/unsup   Et0/24
act/unsup   Et0/25
act/unsup   Et0/26
act/unsup   Et0/27
act/unsup   Et0/28
act/unsup   Et0/29

Encapsulation  Status      Native vlan
-----
802.1q         trunking    1

Vlans allowed on trunk
-----
1,10,20
```

Network Diagram:

The diagram illustrates a network topology with two main sections: **SWITCH VIRTUAL INTERFACE** and **ROUTER ON-A-STICK**.

SWITCH VIRTUAL INTERFACE: This section shows two virtual interfaces connected to a central switch. The left interface is labeled **VLAN 10** with IP **10.0.0.10** and is connected to **VPC1**. The right interface is labeled **VLAN 20** with IP **20.0.0.10** and is connected to **VPC2**.

ROUTER ON-A-STICK: This section shows two virtual interfaces connected to a central switch. The left interface is labeled **VLAN 10** with IP **30.0.0.10** and is connected to **VPC3**. The right interface is labeled **VLAN 20** with IP **40.0.0.10** and is connected to **VPC4**.

Physical layer: The diagram shows a physical connection between the two switches, labeled **Physical**.

System tray: 36°C Mostly cloudy | Search | 17:41 24-06-2026

```
VPC1
*10.0.0.1 icmp_seq=3 ttl=255 time=1.619 ms (ICMP type:3, code:1, Destination host unreachable)
*10.0.0.1 icmp_seq=4 ttl=255 time=1.290 ms (ICMP type:3, code:1, Destination host unreachable)
*10.0.0.1 icmp_seq=5 ttl=255 time=1.504 ms (ICMP type:3, code:1, Destination host unreachable)


VPC1> ping 30.0.0.10

84 bytes from 30.0.0.10 icmp_seq=1 ttl=62 time=4.212 ms
84 bytes from 30.0.0.10 icmp_seq=2 ttl=62 time=2.051 ms
84 bytes from 30.0.0.10 icmp_seq=3 ttl=62 time=2.907 ms
84 bytes from 30.0.0.10 icmp_seq=4 ttl=62 time=2.420 ms
84 bytes from 30.0.0.10 icmp_seq=5 ttl=62 time=3.773 ms


VPC1> ping 40.0.0.10

84 bytes from 40.0.0.10 icmp_seq=1 ttl=62 time=4.777 ms
84 bytes from 40.0.0.10 icmp_seq=2 ttl=62 time=2.216 ms
84 bytes from 40.0.0.10 icmp_seq=3 ttl=62 time=2.410 ms
84 bytes from 40.0.0.10 icmp_seq=4 ttl=62 time=2.204 ms
84 bytes from 40.0.0.10 icmp_seq=5 ttl=62 time=2.060 ms

VPC1>
```

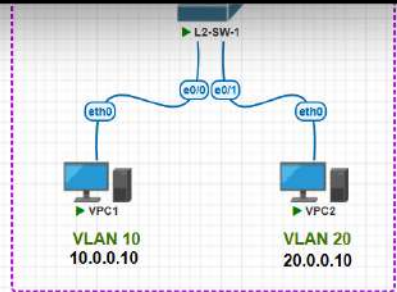

SWITCH VIRTUAL INTERFACE

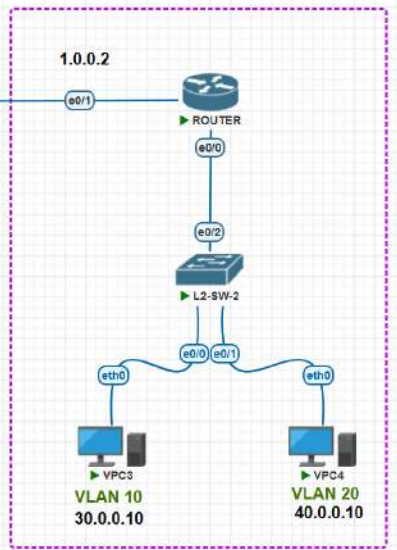

ROUTER ON-A-STICK