


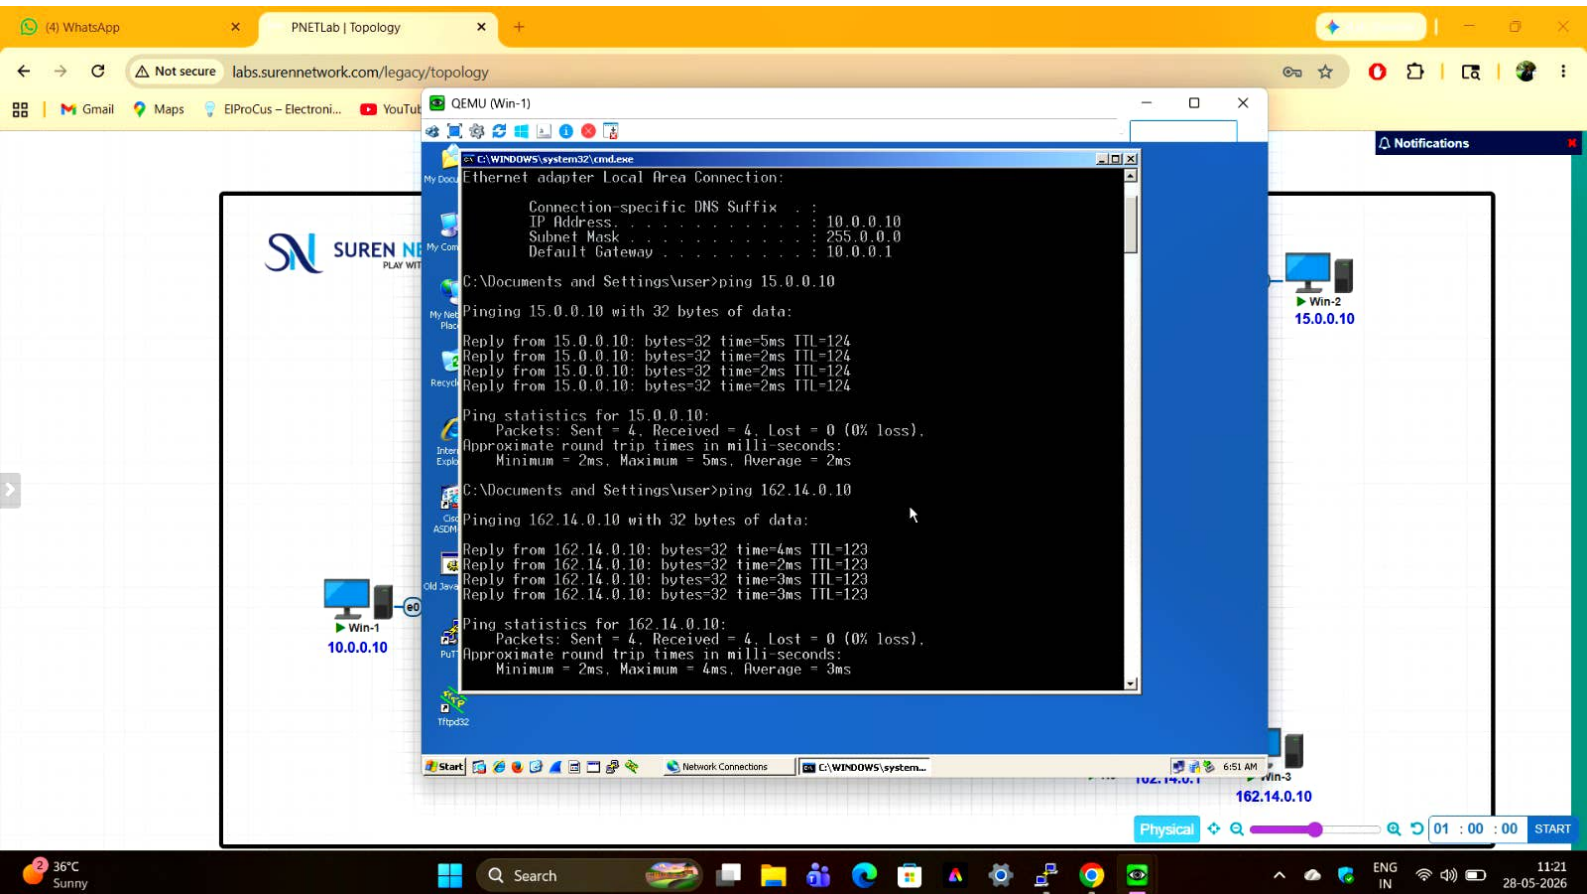

4) WhatsApp x PNETLab | Topology x

Not secure labs.surennetwork.com/labs/pnetlab-topology

QEMU (Win-3)

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
IP Address : 162.14.0.10
Subnet Mask : 255.255.0.0
Default Gateway : 162.14.0.1

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=3ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=3ms TTL=123

Ping statistics for 10.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>ping 15.0.0.10

Pinging 15.0.0.10 with 32 bytes of data:

Reply from 15.0.0.10: bytes=32 time=7ms TTL=124
Reply from 15.0.0.10: bytes=32 time=3ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 15.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 7ms, Average = 3ms

Win-2 15.0.0.10

Win-3 162.14.0.10

Physical 01 : 00 : 00 START

36°C Sunny 11:25 28-05-2026

4) WhatsApp PNETLab | Topology

labs.surennetwork.com/legacy/topology

QEMU (Win-2)

My Documents My Computer My Network Places Recycle Bin Internet Explorer Cisco ASDM-1... Old Java ASDM Win-1 10.0.0.1 PUTTY Tftp32

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix :
IP Address : 15.0.0.10
Subnet Mask : 255.0.0.0
Default Gateway : 15.0.0.1

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=3ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=3ms TTL=124

Ping statistics for 10.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>ping 162.14.0.10

Pinging 162.14.0.10 with 32 bytes of data:

Reply from 162.14.0.10: bytes=32 time=15ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=3ms TTL=124

Ping statistics for 162.14.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 15ms, Average = 5ms

Win-2 15.0.0.10

Win-3 162.14.0.10

Physical 01 : 00 : 00 START

36°C Sunny 11:23 28-05-2026

[illegible]

4) WhatsApp PNETLab | Topology

Not secure labs.surennetwork.com/legacy/topology

Notifications

```
R5
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRE, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 21.0.0.1
S 15.0.0.0/8 [1/0] via 21.0.0.1
S 20.0.0.0/8 [1/0] via 21.0.0.1
C 21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 21.0.0.0/8 is directly connected, Ethernet0/0
L 21.0.0.2/32 is directly connected, Ethernet0/0
S 30.0.0.0/8 [1/0] via 21.0.0.1
S 162.14.0.0/16 [1/0] via 192.168.168.2
S 172.19.0.0/16 [1/0] via 21.0.0.1
C 192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
L 192.168.168.0/24 is directly connected, Ethernet0/1
L 192.168.168.1/32 is directly connected, Ethernet0/1
R5#
R5#
R5#
R5#
```

Win-1 10.0.0.10

R1 10.1

R3 172.19.0.1

R4 172.19.0.2

R5 21.0.0.2

R6 162.14.0.1

Win-2 15.0.0.10

Win-3 162.14.0.10

Physical 01 : 00 : 00 START

36°C Sunny

Search

ENG IN

11:16 28-05-2026

4) WhatsApp PNETLab | Topology Not secure labs.surennetwork.com/legacy/topology

R1

E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.0.0.0/8 is directly connected, Ethernet0/0
L 10.0.0.1/32 is directly connected, Ethernet0/0
S 15.0.0.0/8 [1/0] via 20.0.0.2
C 20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/1
L 20.0.0.1/32 is directly connected, Ethernet0/1
S 21.0.0.0/8 [1/0] via 20.0.0.2
S 30.0.0.0/8 [1/0] via 20.0.0.2
S 162.14.0.0/16 [1/0] via 20.0.0.2
S 172.19.0.0/16 [1/0] via 20.0.0.2
S 192.168.168.0/24 [1/0] via 20.0.0.2
R1#
R1#
R1#

```
graph LR
    Win-1[Win-1 10.0.0.10] --- R1[R1]
    R1 --- R3[R3]
    R3 --- R4[R4]
    R3 --- R5[R5]
    R4 --- Win-2[Win-2 15.0.0.10]
    R5 --- R6[R6]
    R6 --- Win-3[Win-3 162.14.0.10]
    R5 --- R1
```

Physical + 01 : 00 : 00 START

36°C Sunny

Search

ENG IN

11:10 28-05-2026

4) WhatsApp PNETLab | Topology

Not secure labs.surennetwork.com/legacy/topology

Notifications

R4

```
1 - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 172.19.0.1
C 15.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 15.0.0.0/8 is directly connected, Ethernet0/0
L 15.0.0.1/32 is directly connected, Ethernet0/0
S 20.0.0.0/8 [1/0] via 172.19.0.1
S 21.0.0.0/8 [1/0] via 172.19.0.1
S 30.0.0.0/8 [1/0] via 172.19.0.1
S 162.14.0.0/16 [1/0] via 172.19.0.1
S 172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 172.19.0.0/16 is directly connected, Ethernet0/1
L 172.19.0.2/32 is directly connected, Ethernet0/1
S 192.168.168.0/24 [1/0] via 172.19.0.1
R4#
R4#
R4#
R4#
```

Win-1 10.0.0.10 R1

172.19.0.2 e0/1 R4 15.0.0.1 e0/0 Win-2 15.0.0.10

172.19.0.1 e0/1 21.0.0.1 e0/2 R5 21.0.0.2 e0/0 192.168.168.1 e0/1

R6 192.168.168.2 e0/1 162.14.0.1 e0/0 Win-3 162.14.0.10

Physical 01 : 00 : 00 START

36°C Sunny Search ENG IN 11:08 28-05-2026

4) WhatsApp PNETLab | Topology

R3

```
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

S  10.0.0.0/8 [1/0] via 30.0.0.1
S  15.0.0.0/8 [1/0] via 172.19.0.2
S  20.0.0.0/8 [1/0] via 30.0.0.1
C  21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
   21.0.0.0/8 is directly connected, Ethernet0/2
   21.0.0.1/32 is directly connected, Ethernet0/2
C  30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
   30.0.0.0/8 is directly connected, Ethernet0/0
   30.0.0.2/32 is directly connected, Ethernet0/0
S  162.14.0.0/16 [1/0] via 21.0.0.2
C  172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
   172.19.0.0/16 is directly connected, Ethernet0/1
   172.19.0.1/32 is directly connected, Ethernet0/1
S  192.168.168.0/24 [1/0] via 21.0.0.2
R3#
```

Win-1 10.0.0.10

Win-2 15.0.0.10

Win-3 162.14.0.10

Physical 01 : 00 : 00 START

36°C Sunny 11:09 28-05-2026

```
R2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

10.0.0.0/8 [1/0] via 20.0.0.1
15.0.0.0/8 [1/0] via 30.0.0.2
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
  20.0.0.0/8 is directly connected, Ethernet0/0
  20.0.0.2/32 is directly connected, Ethernet0/0
21.0.0.0/8 [1/0] via 30.0.0.2
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
  30.0.0.0/8 is directly connected, Ethernet0/1
  30.0.0.1/32 is directly connected, Ethernet0/1
162.14.0.0/16 [1/0] via 30.0.0.2
172.19.0.0/16 [1/0] via 30.0.0.2
192.168.168.0/24 [1/0] via 30.0.0.2
```

