



SPANNING TREE PROTOCOL



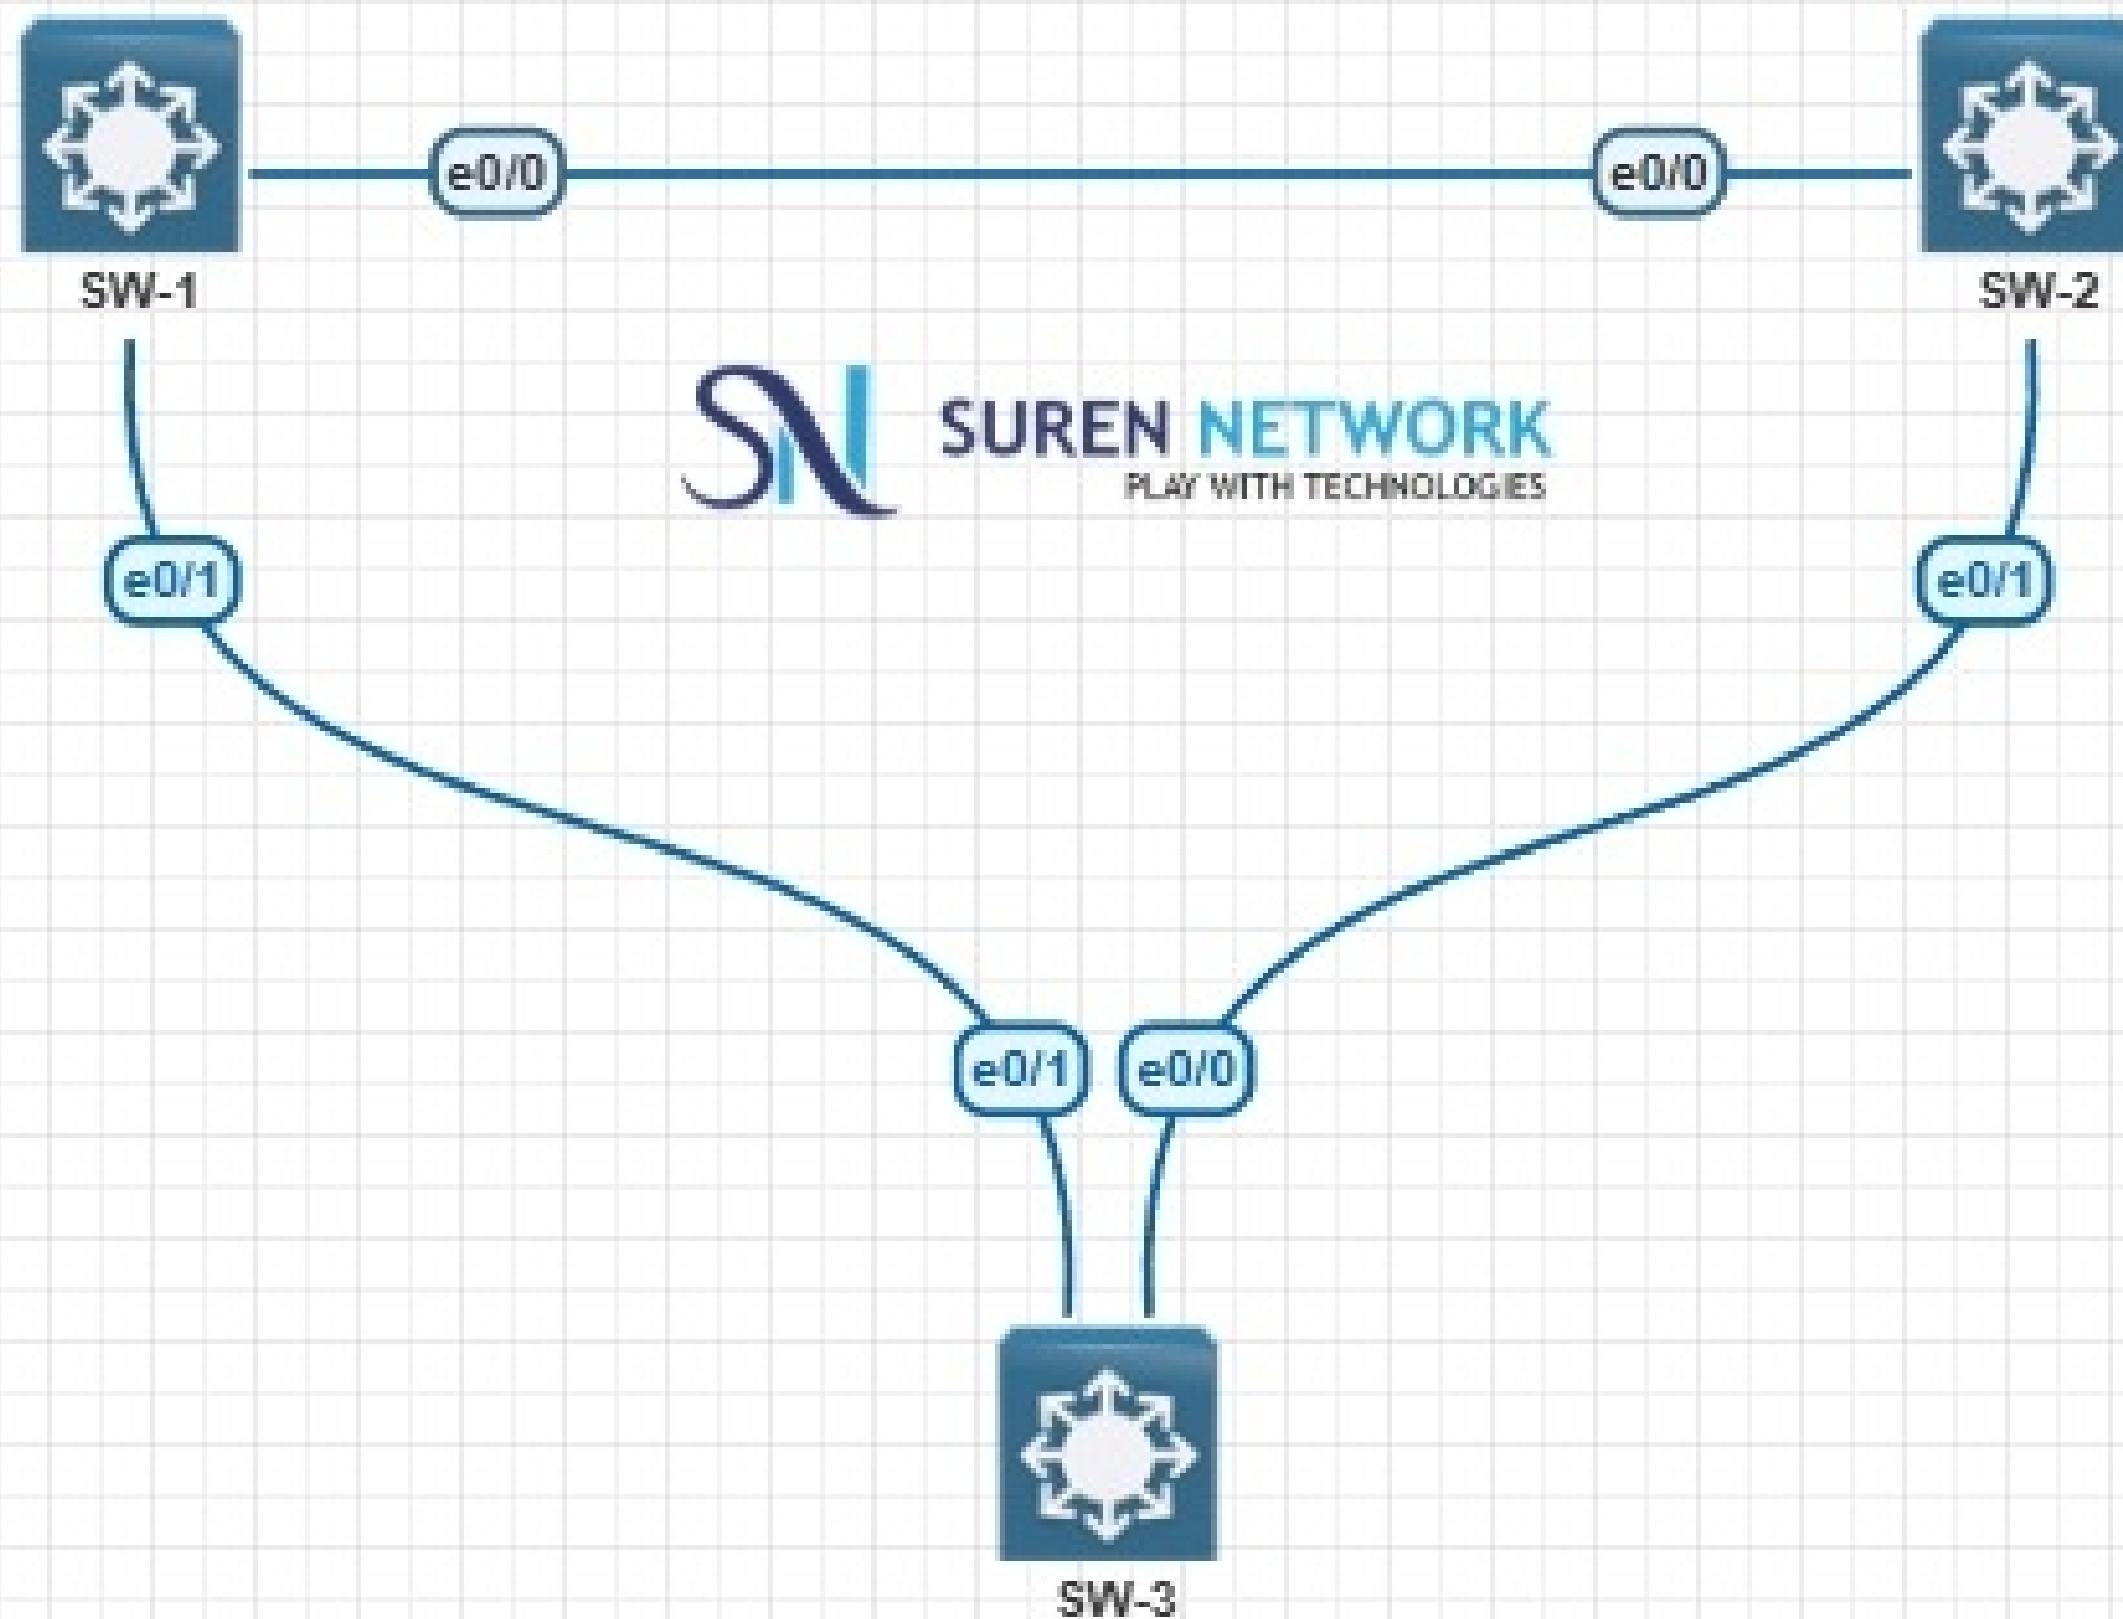

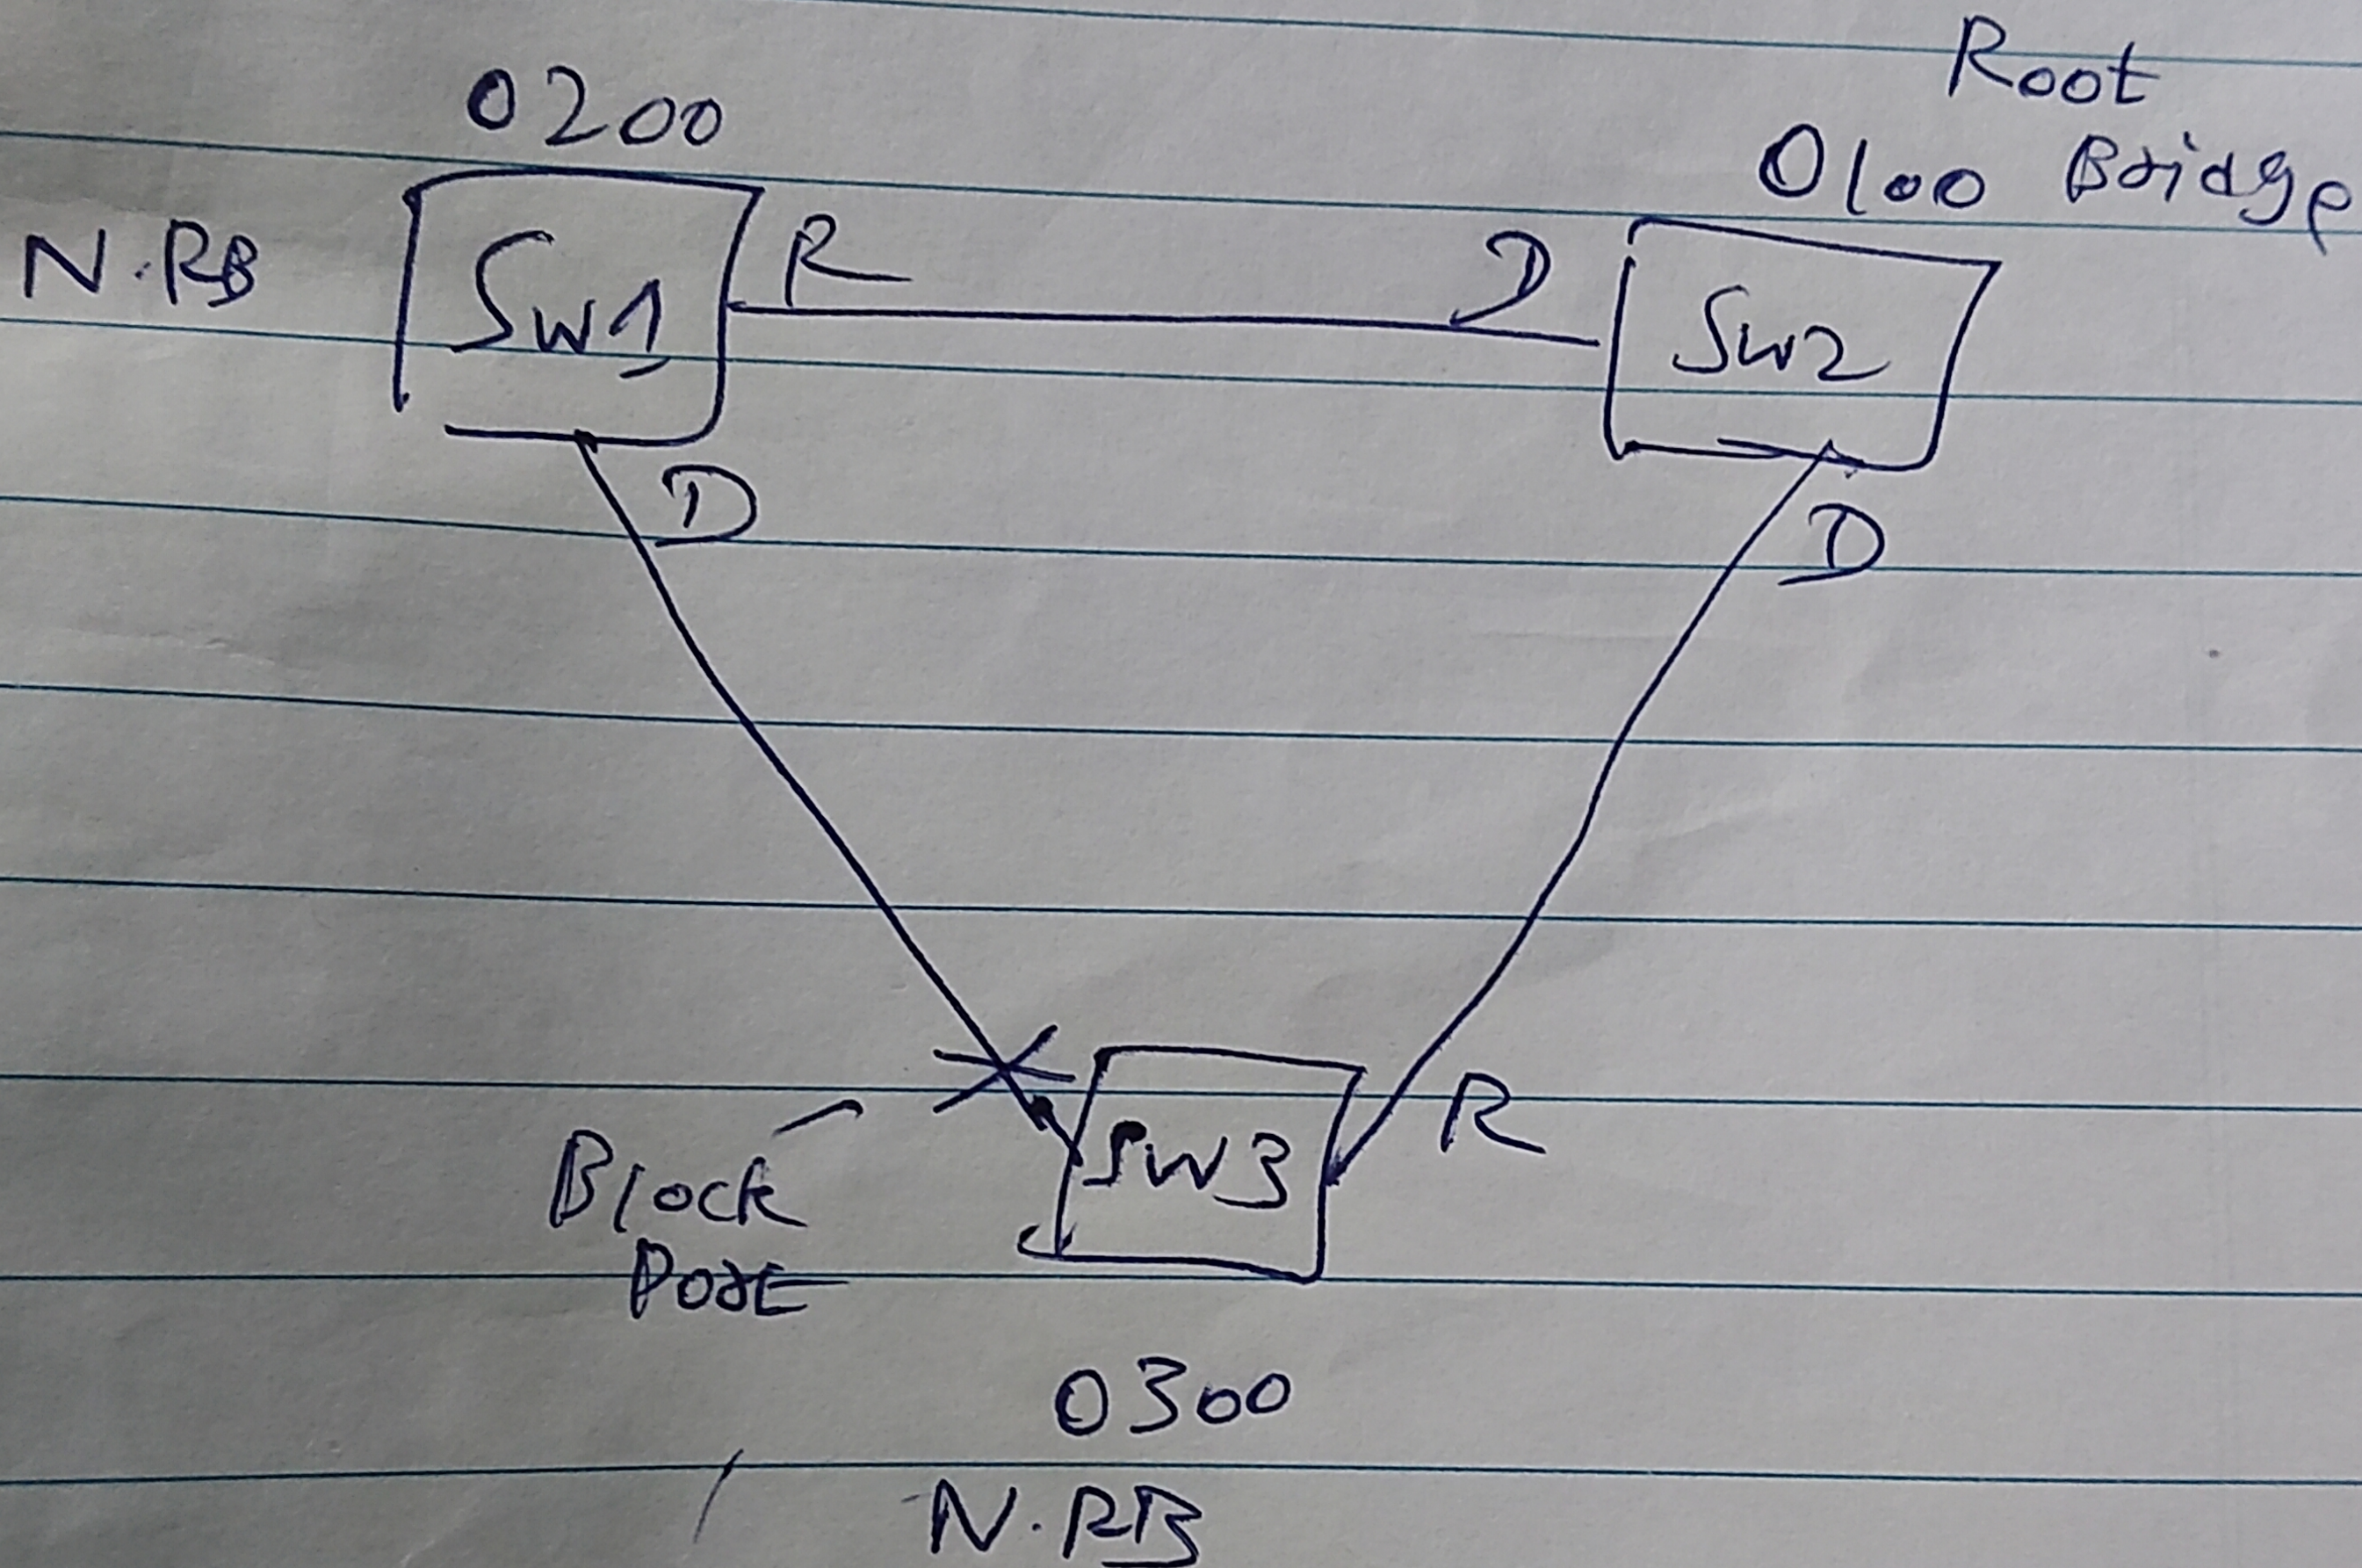

SW-1



SW-1#

SW-1#

SW-1#sh spanning-tree

VLAN0001

Spanning tree enabled protocol ieee

Root ID Priority 32769

Address aabb.cc00.0100

Cost 100

Port 1 (Ethernet0/0)

Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority 32769 (priority 32768 sys-id-ext 1)

Address aabb.cc00.0200

Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Aging Time 15 sec

Interface	Role	Sts	Cost	Prio.Nbr	Type
-----------	------	-----	------	----------	------

Et0/0	Root	FWD	100	128.1	P2p
-------	------	-----	-----	-------	-----

Et0/1	Desg	FWD	100	128.2	P2p
-------	------	-----	-----	-------	-----

SW-1#



SW-2



```
SW-2#sh spanning-tree
```

```
VLAN0001
```

```
Spanning tree enabled protocol ieee
```

```
Root ID      Priority      32769
```

```
Address      aabb.cc00.0100
```

```
This bridge is the root
```

```
Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
Bridge ID    Priority      32769  (priority 32768 sys-id-ext 1)
```

```
Address      aabb.cc00.0100
```

```
Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
Aging Time   300 sec
```

```
Interface          Role Sts Cost          Prio.Nbr Type
```

```
-----
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/0	Desg	FWD	100	128.1	P2p
Et0/1	Desg	FWD	100	128.2	P2p

```
SW-2#
```

```
SW-3#sh spanning-tree
```

```
VLAN0001
```

```
Spanning tree enabled protocol ieee
```

```
Root ID      Priority      32769
             Address      aabb.cc00.0100
             Cost        100
             Port        1 (Ethernet0/0)
             Hello Time   2 sec    Max Age 20 sec    Forward Delay 15 sec
```

```
Bridge ID    Priority      32769 (priority 32768 sys-id-ext 1)
             Address      aabb.cc00.0300
             Hello Time   2 sec    Max Age 20 sec    Forward Delay 15 sec
             Aging Time   300 sec
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/0	Root	FWD	100	128.1	P2p
Et0/1	Altn	BLK	100	128.2	P2p

```
SW-3#
```