


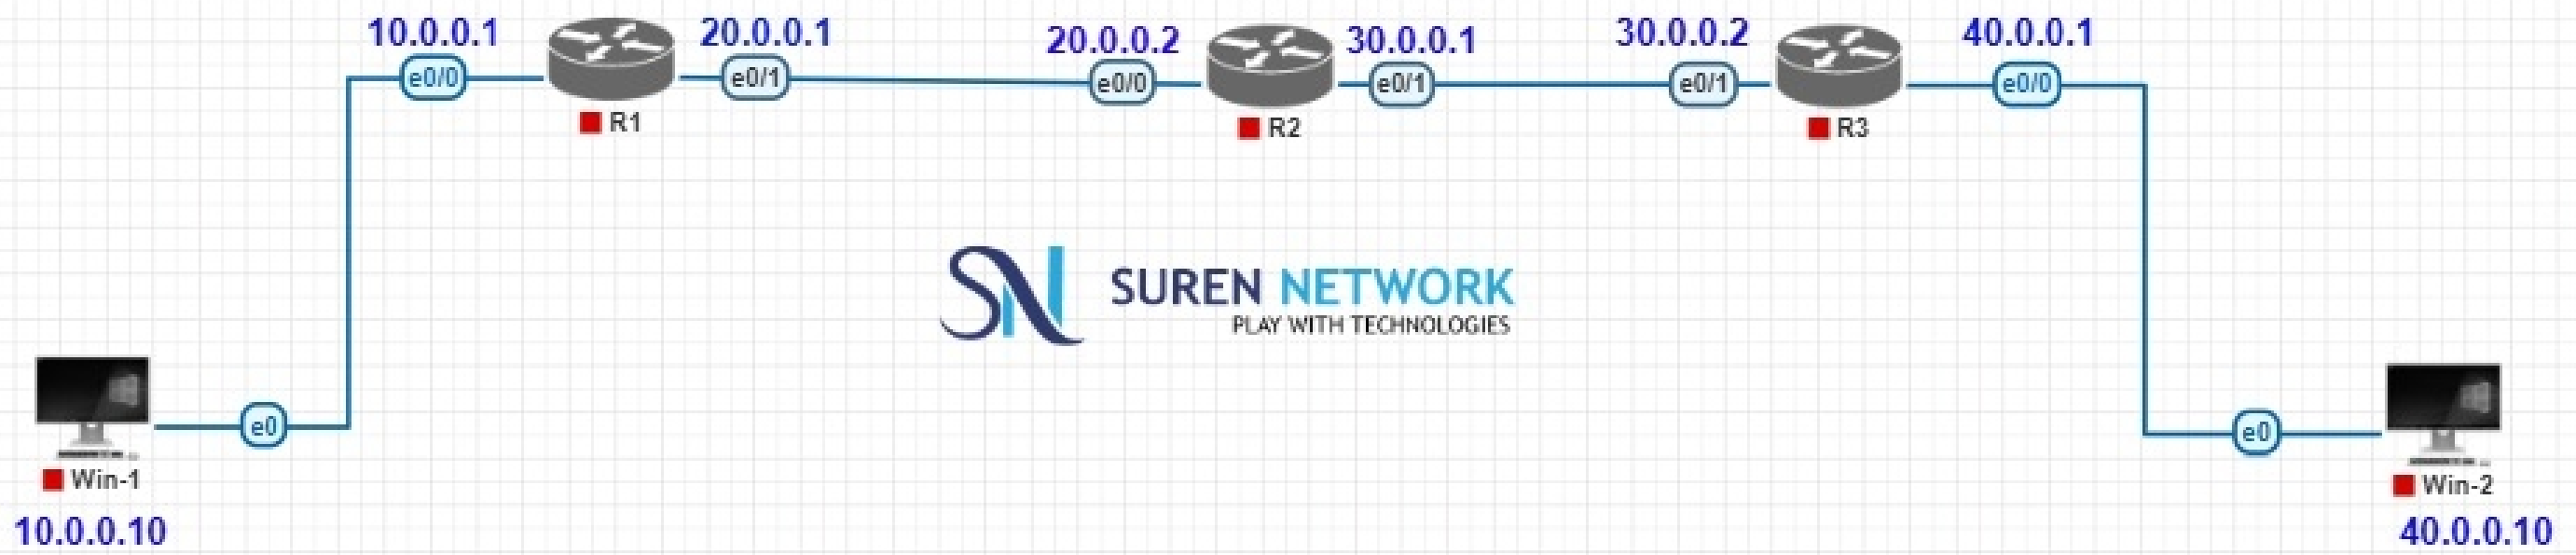

```
R1(config)#int e0/0
R1(config-if)#ip add 10.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#ex
R1(config)#
R1(config)#int e0/1
R1(config-if)#ip add 20.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#ex
R1(config)#
R1(config)#router rip
R1(config-router)#network 10.0.0.0
R1(config-router)#network 20.0.0.0
R1(config-router)#ex
R1(config)#
R1(config)#
R1(config)#end
```

```
R1#
R1#
R1#
R1#
R1#
```

```
*Aug 17 08:26:55.481: %SYS-5-CONFIG_I: Configured from console by console
```

```
R1#sh ip ro
```

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
```

**RIP CONFIG
ON R1**



R1



```
R1#
R1#
R1#
*Aug 17 08:26:55.481: %SYS-5-CONFIG_I: Configured from console by console
R1#sh ip ro
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
R       30.0.0.0/8 [120/1] via 20.0.0.2, 00:00:04, Ethernet0/1
R       40.0.0.0/8 [120/2] via 20.0.0.2, 00:00:04, Ethernet0/1
R1#
```

**ROUTE
UPDATED BY
RIP**



R2



```
R2#conf t
```

```
Enter configuration commands, one per line.  End with CNTL/Z.
```

```
R2(config)#int e0/0
```

```
R2(config-if)#ip add 20.0.0.2 255.0.0.0
```

```
R2(config-if)#no sh
```

```
R2(config-if)#ex
```

```
R2(config)#int e0/1
```

```
R2(config-if)#ip add 30.0.0.1 255.0.0.0
```

```
R2(config-if)#no sh
```

```
R2(config-if)#ex
```

```
R2(config)#router rip
```

```
R2(config-router)#network 20.0.0.0
```

```
R2(config-router)#network 30.0.0.0
```

```
R2(config-router)#ex
```

```
R2(config)#
```

```
R2(config)#
```

```
R2(config)#
```

```
R2(config)#
```

```
R2(config)#
```

```
R2(config)#
```

```
R2(config)#end
```

```
R2#sh
```

```
*Aug 17 08:27:17.068: %SYS-5-CONFIG_I: Configured from console by console
```

**RIP
CONFIG
ON R2**



R2



```
R2#sh
*Aug 17 08:27:17.068: %SYS-5-CONFIG_I: Configured from console by console
R2#sh ip ro
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

R      10.0.0.0/8 [120/1] via 20.0.0.1, 00:00:01, Ethernet0/0
      20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C      20.0.0.0/8 is directly connected, Ethernet0/0
L      20.0.0.2/32 is directly connected, Ethernet0/0
      30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C      30.0.0.0/8 is directly connected, Ethernet0/1
L      30.0.0.1/32 is directly connected, Ethernet0/1
R      40.0.0.0/8 [120/1] via 30.0.0.2, 00:00:06, Ethernet0/1
R2#
```

**ROUTE
UPDATED
BY RIP**

```
R3#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R3(config)#int e0/1
R3(config-if)#ip add 30.0.0.2 255.0.0.0
R3(config-if)#no sh
R3(config-if)#ex
R3(config)#
R3(config)#
R3(config)#int e0/0
R3(config-if)#ip add 40.0.0.1 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exx
      ^
% Invalid input detected at '^' marker.

R3(config-if)#
R3(config-if)#
R3(config-if)#
R3(config-if)#ex
R3(config)#
R3(config)#
R3(config)#
R3(config)#
R3(config)#
R3(config)#
R3(config)#
R3(config)#router rip
R3(config-router)#network 30.0.0.0
R3(config-router)#network 40.0.0.0
R3(config-router)#ex
R3(config)#
```

**RIP CONFIG
ON R3**

```
R3(config)#
R3(config)#
R3(config)#
R3(config)#
R3(config)#do sh ip ro
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       30.0.0.0/8 is directly connected, Ethernet0/1
L       30.0.0.2/32 is directly connected, Ethernet0/1
      40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       40.0.0.0/8 is directly connected, Ethernet0/0
L       40.0.0.1/32 is directly connected, Ethernet0/0
R3(config)#
R3(config)#
R3(config)#
R3(config)#
*Aug 17 08:27:10.496: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R3(config)#
```

**ROUTE
UPDATED
BY RIP**



My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM

Old Java

PuTTY

TFTP

Tftpd32

Network Connections

File Edit View Favorites Tools Advanced Help

Back Forward Stop Search Folders

Address Network Connections Go

Network Tasks

- Create a new connection
- Set up a home or office network
- Change Windows Firewall settings
- Disable this network device
- Repair this connection
- Rename this connection
- View status of this connection
- Change settings for this connection

Other Places

- Control Panel
- My Network Places
- My Documents
- My Computer

Details

Local Area Connection

LAN or High-Speed Internet

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600.1]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ncpa.cpl

C:\Documents and Settings\user>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=4ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125

Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\user>_

PING SUCCESSFUL