




STP-1



SW1

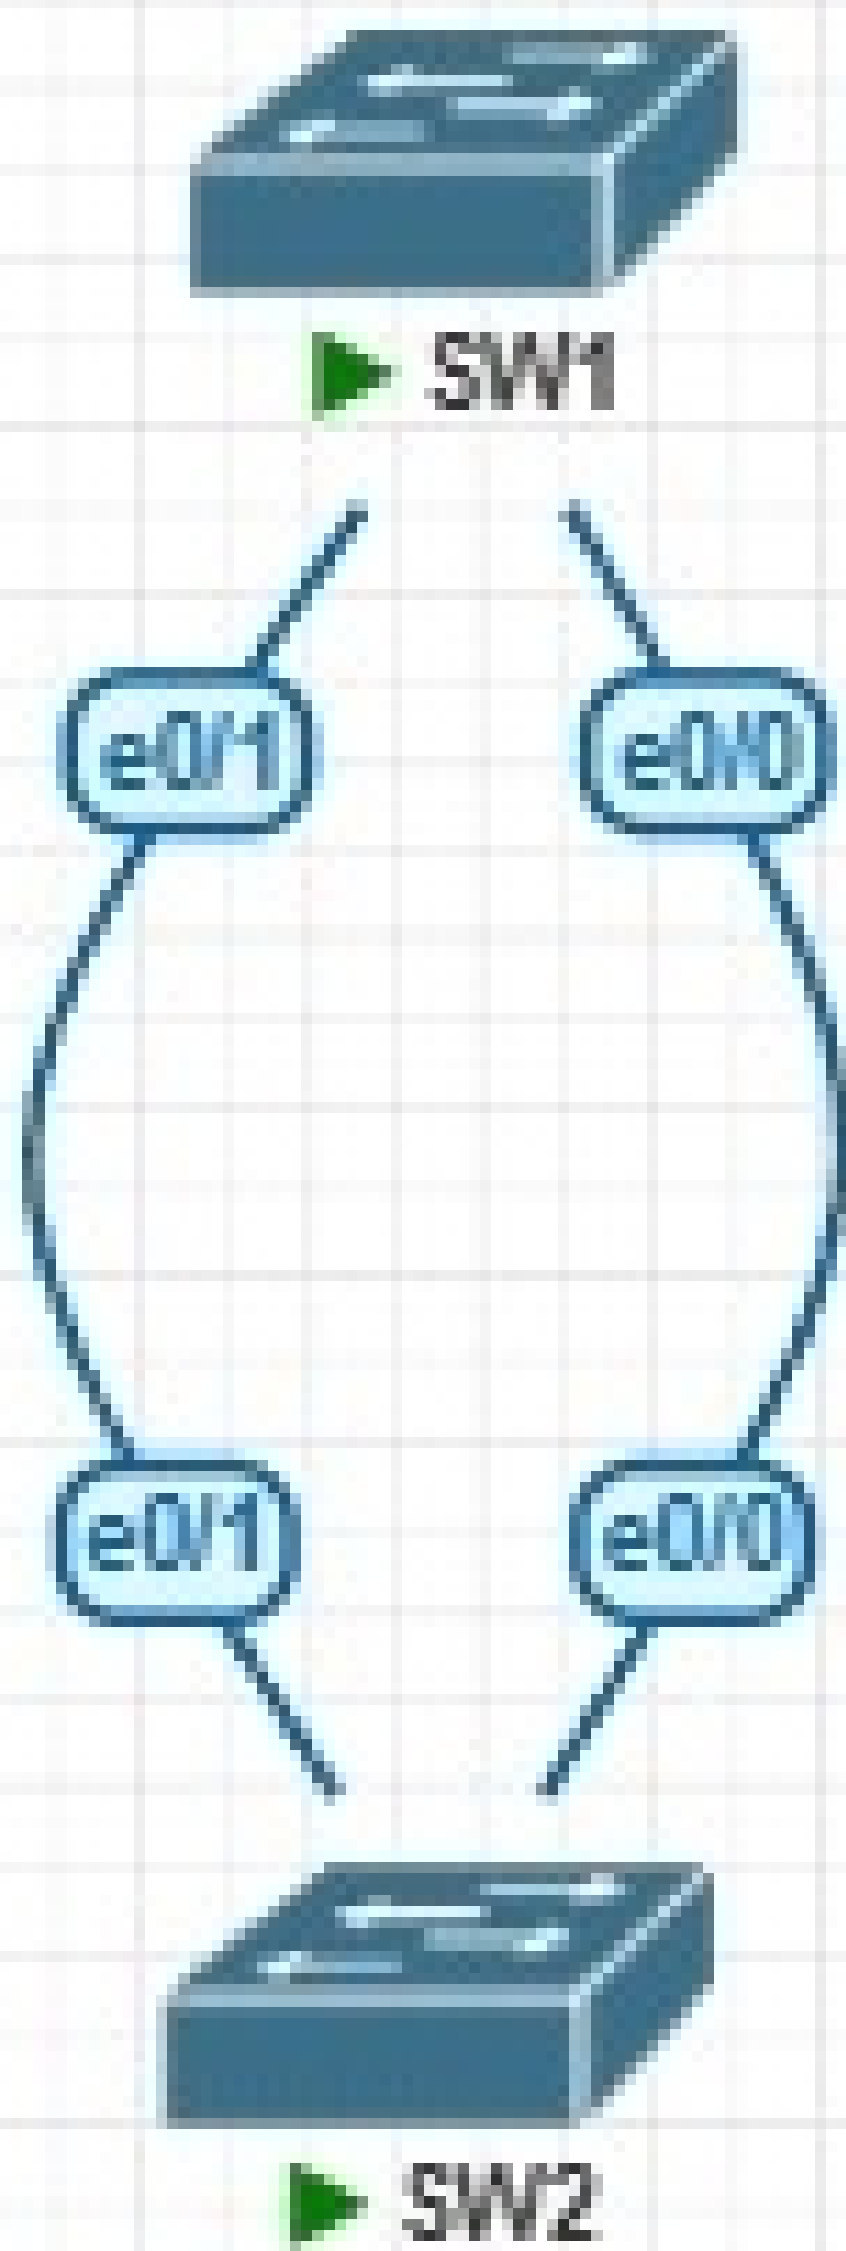

```
SW1#sh spanning-tree
```

```
VLAN0001
```

```
Spanning tree enabled protocol ieee
```

```
Root ID      Priority      32769
```

```
Address      aabb.cc00.0100
```

```
This bridge is the root
```

```
Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
Bridge ID    Priority      32769  (priority 32768 sys-id-ext 1)
```

```
Address      aabb.cc00.0100
```

```
Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
Aging Time   300 sec
```

```
Interface          Role Sts Cost          Prio.Nbr Type
```

```
-----
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/0	Desg	FWD	100	128.1	P2p
Et0/1	Desg	FWD	100	128.2	P2p

```
SW1#
```



SW2



% Invalid input detected at '^' marker.

SW2#sh spanning-tree

VLAN0001


Spanning tree enabled protocol ieee

Root ID Priority 32769
 Address aabb.cc00.0100
 Cost 100
 Port 1 (Ethernet0/0)
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID Priority 32769 (priority 32768 sys-id-ext 1)
 Address aabb.cc00.0200
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Aging Time 300 sec

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/0	Root	FWD	100	128.1	P2p
Et0/1	Altn	BLK	100	128.2	P2p

SW2#

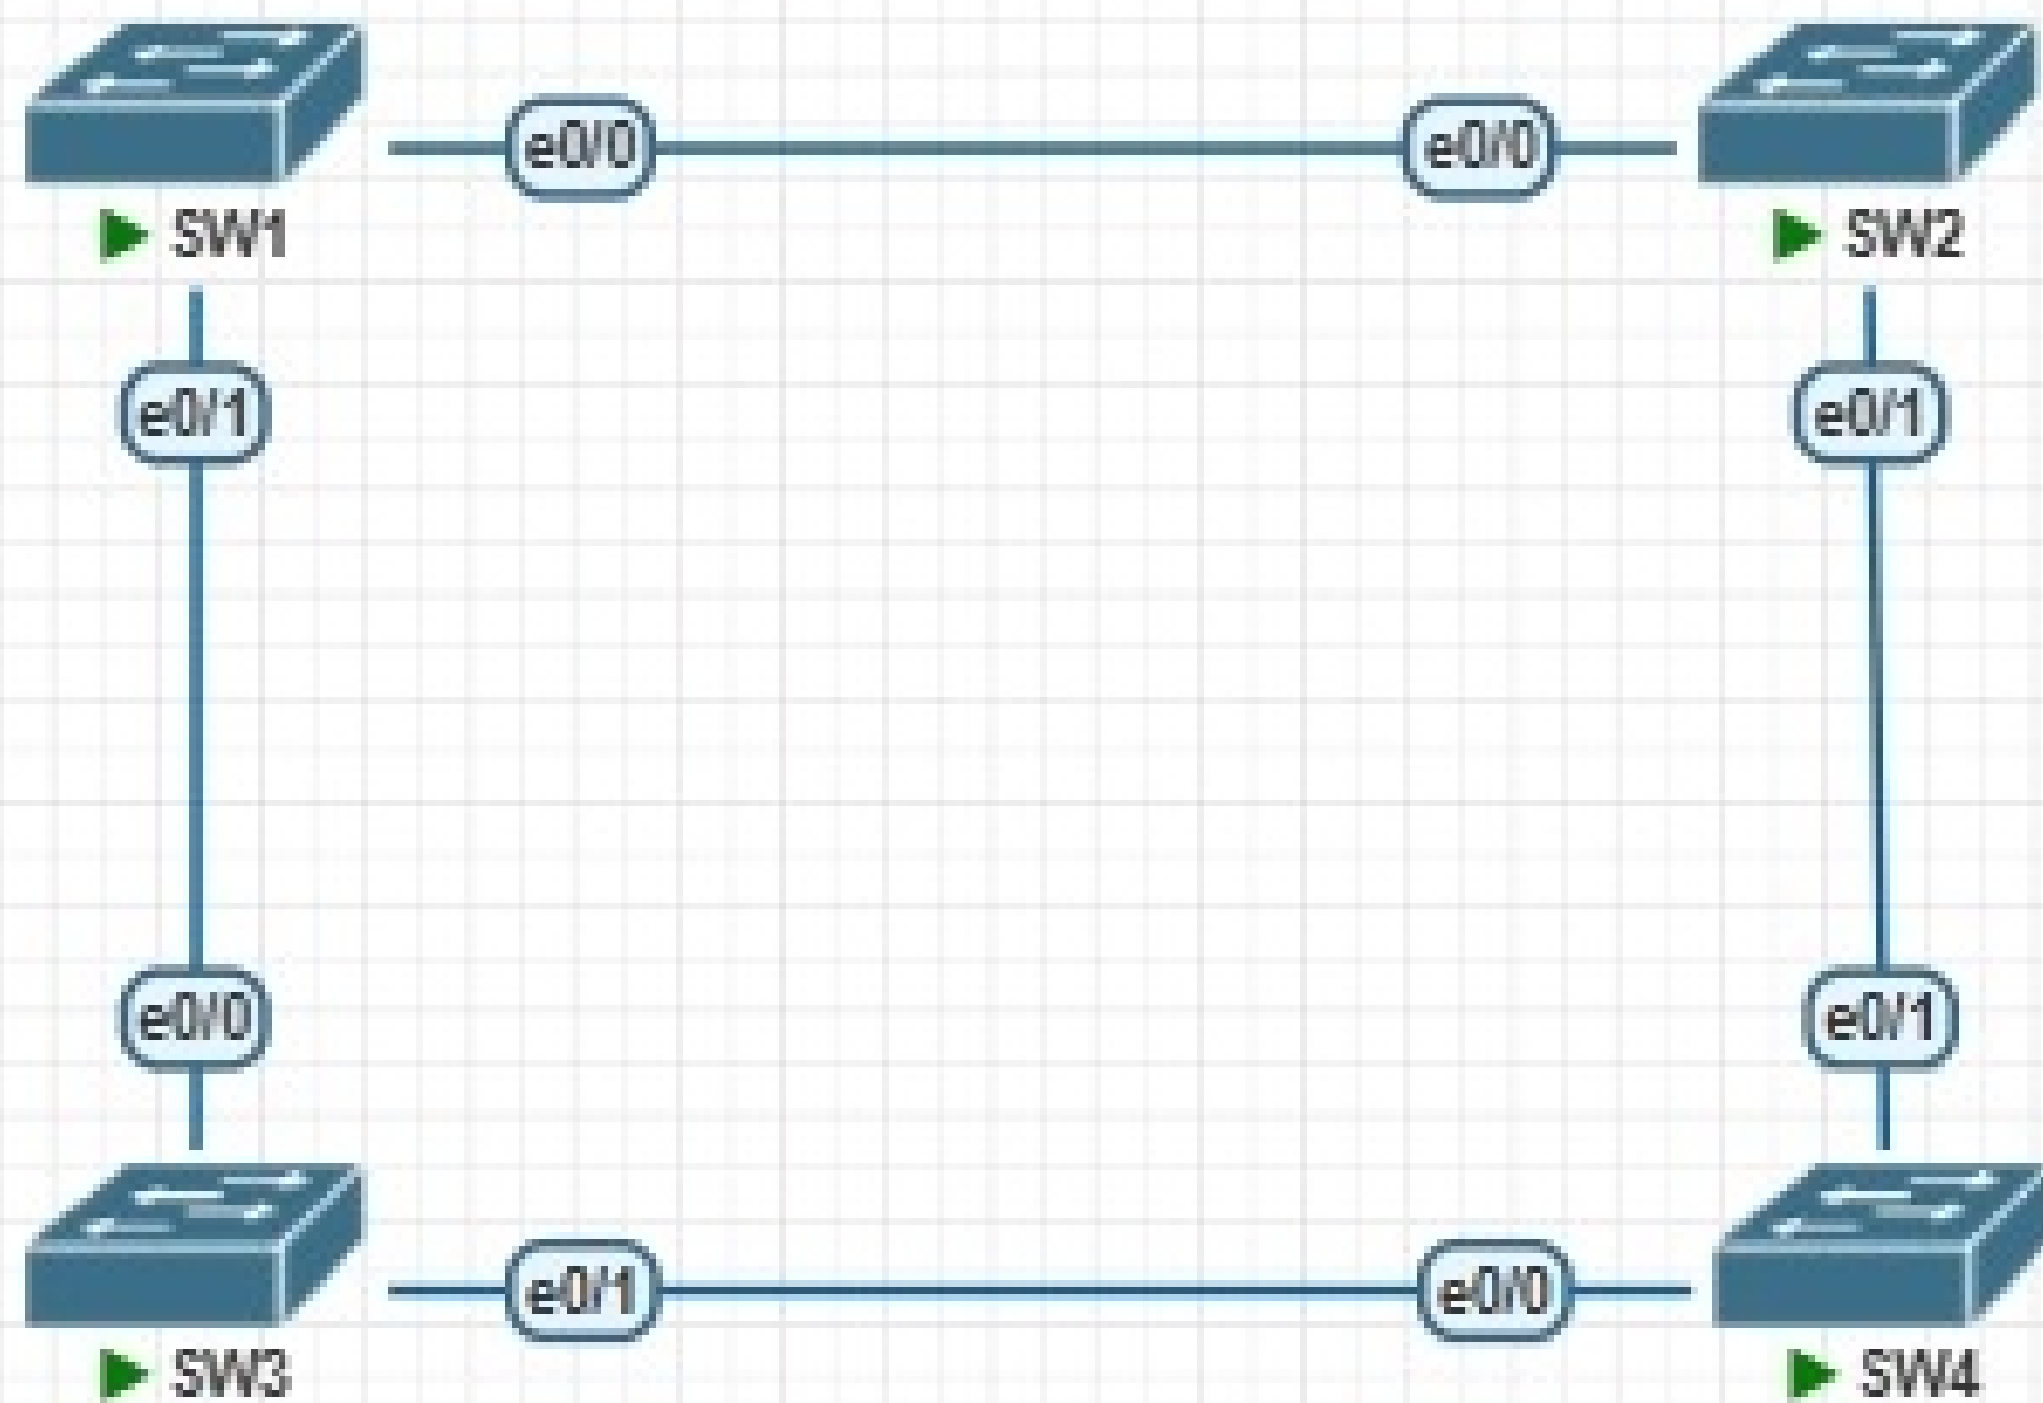

STP-2



SW1



```
SW1#sh spanning-tree
```

```
VLAN0001
```

```
Spanning tree enabled protocol ieee
```

```
Root ID      Priority      32769
             Address      aabb.cc00.0300
             Cost        100
             Port        2 (Ethernet0/1)
             Hello Time   2 sec    Max Age 20 sec    Forward Delay 15 sec
```

```
Bridge ID    Priority      32769 (priority 32768 sys-id-ext 1)
             Address      aabb.cc00.0600
             Hello Time    2 sec    Max Age 20 sec    Forward Delay 15 sec
             Aging Time    300 sec
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/0	Desg	FWD	100	128.1	P2p
Et0/1	Root	FWD	100	128.2	P2p

```
SW1#
```



SW2



```
Switch>en
```

```
Switch#sh spanning-tree
```

```
VLAN0001
```

```
Spanning tree enabled protocol ieee
```

```
Root ID      Priority      32769
```

```
Address      aabb.cc00.0300
```

```
Cost         200
```

```
Port         2 (Ethernet0/1)
```

```
Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
Bridge ID    Priority      32769 (priority 32768 sys-id-ext 1)
```

```
Address      aabb.cc00.0400
```

```
Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
Aging Time   300 sec
```

```
Interface          Role Sts Cost          Prio.Nbr Type
```

```
-----
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/0	Altn	BLK	100	128.1	P2p
Et0/1	Root	FWD	100	128.2	P2p

```
Switch#
```




SW3



```
SW3#sh spanning-tree
```

```
VLAN0001
```

```
Spanning tree enabled protocol ieee
```

```
Root ID      Priority      32769
```

```
Address      aabb.cc00.0300
```

```
This bridge is the root
```

```
Hello Time    2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
Bridge ID    Priority      32769  (priority 32768 sys-id-ext 1)
```

```
Address      aabb.cc00.0300
```

```
Hello Time    2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
Aging Time    300 sec
```

```
Interface          Role Sts Cost          Prio.Nbr Type
```


```
-----
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/0	Desg	FWD	100	128.1	P2p
Et0/1	Desg	FWD	100	128.2	P2p

```
SW3#
```



SW4



SW4#sh spanning-tree

VLAN0001

Spanning tree enabled protocol ieee

```

Root ID      Priority      32769
              Address      aabb.cc00.0300
              Cost        100
              Port        1 (Ethernet0/0)
              Hello Time   2 sec    Max Age 20 sec    Forward Delay 15 sec
    
```

```

Bridge ID    Priority      32769   (priority 32768 sys-id-ext 1)
              Address      aabb.cc00.0500
              Hello Time   2 sec    Max Age 20 sec    Forward Delay 15 sec
              Aging Time   300 sec
    
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
-----	----	---	-----	-----	-----
Et0/0	Root	FWD	100	128.1	P2p
Et0/1	Desg	FWD	100	128.2	P2p

SW4#