






R1

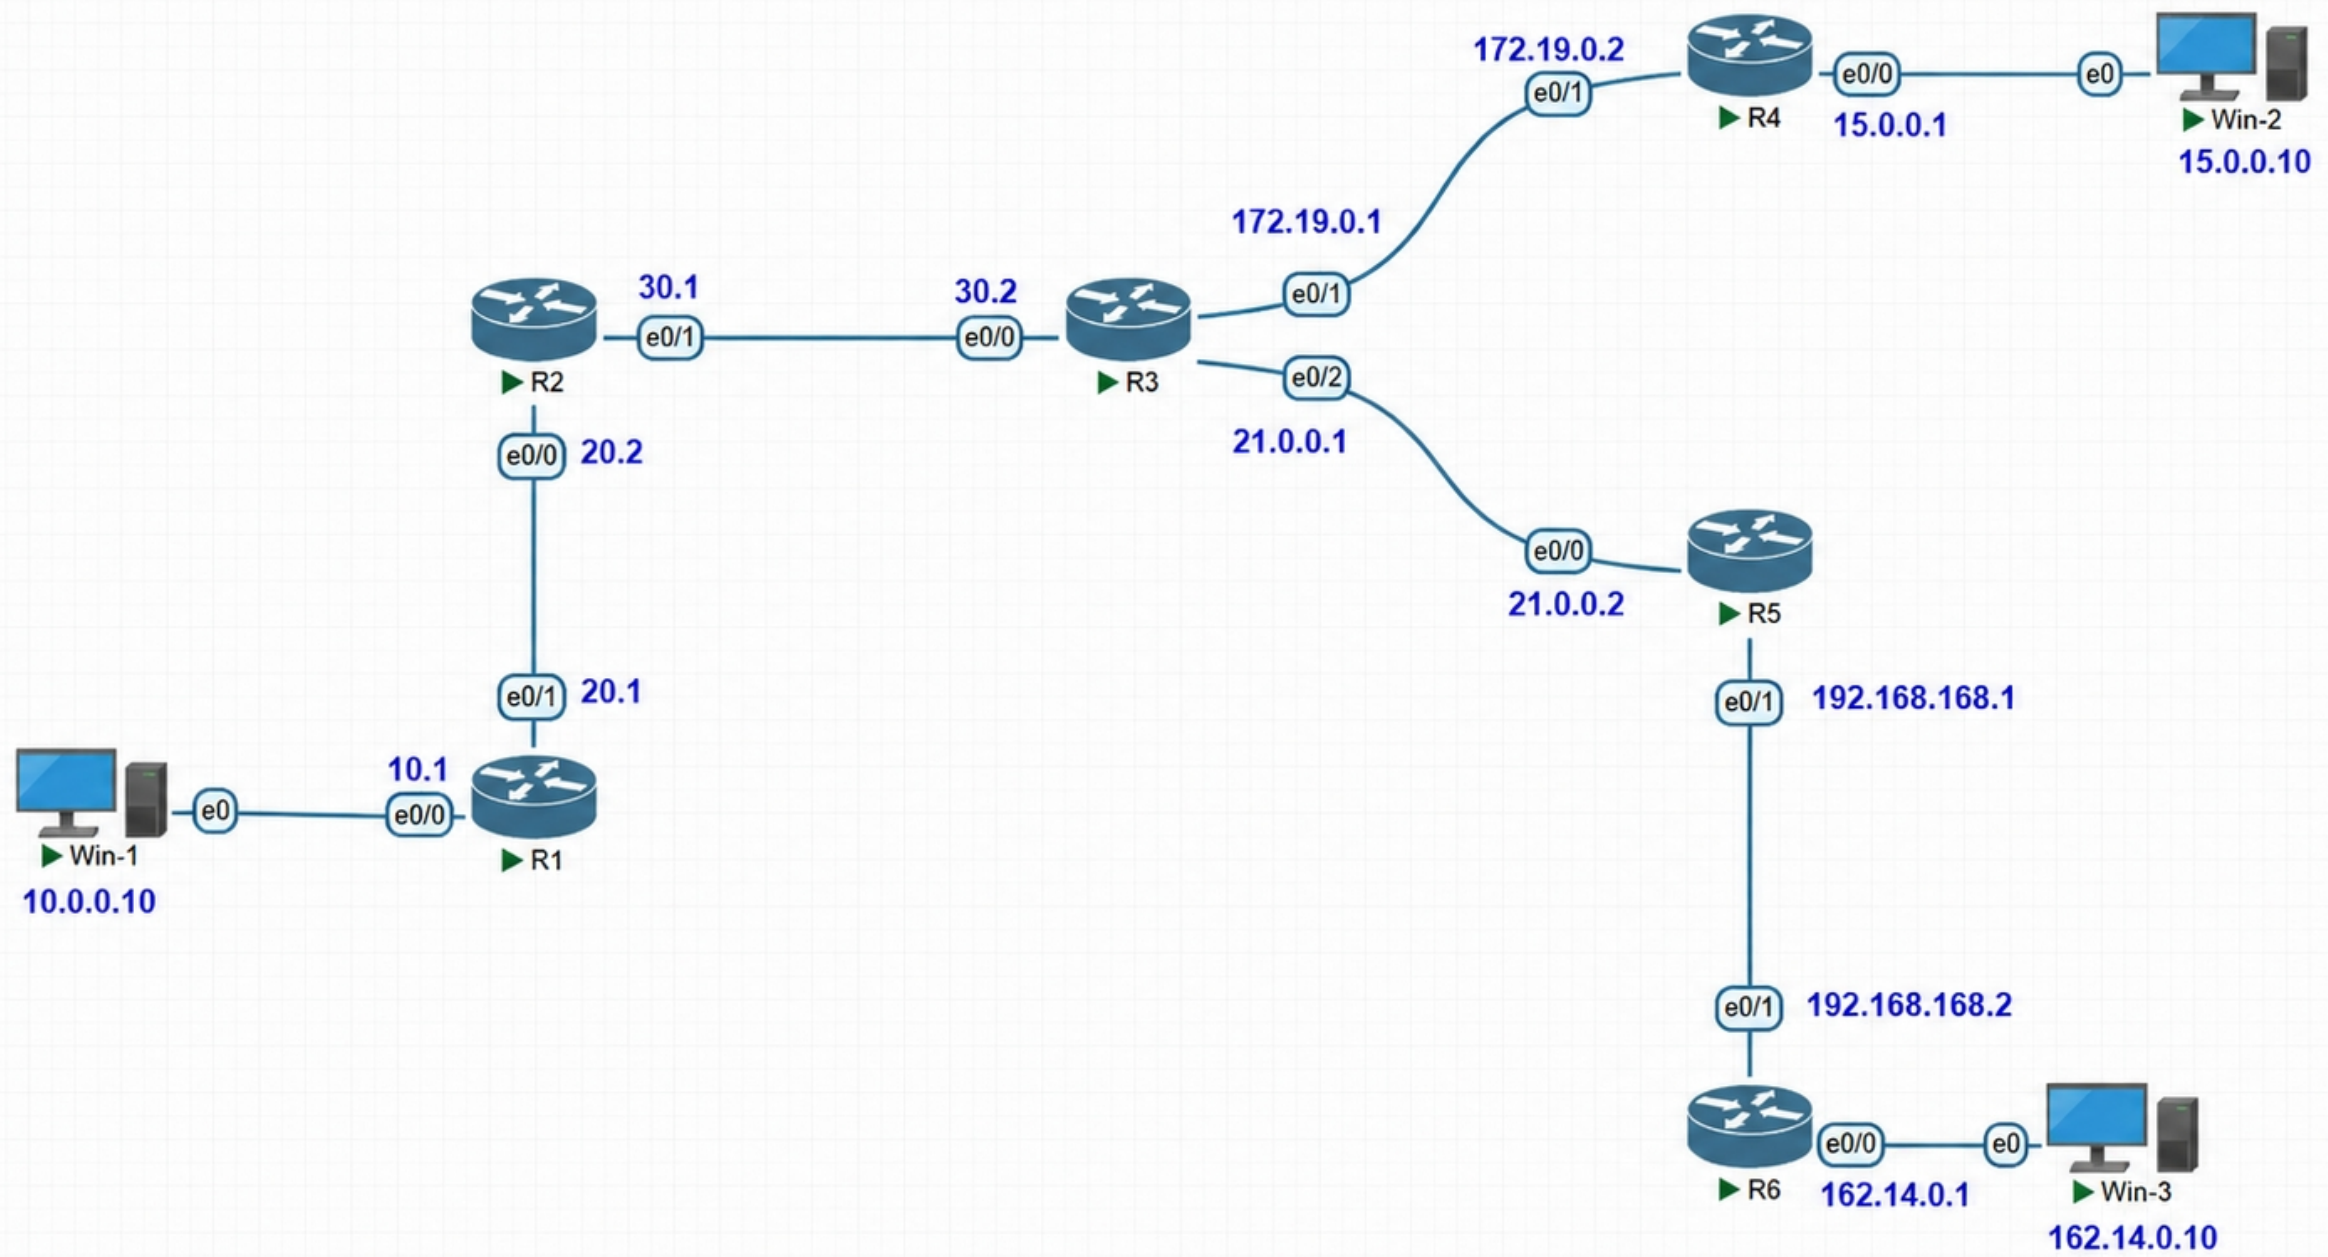

```
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#int e0/0
R1(config-if)#ip add 10.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#
R1(config-if)#int e0/1
R1(config-if)#ip add 20.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#
R1(config-if)#ip route 162.42.0.0 255.255.0.0 20.0.0.2
R1(config)#no ip route 162.42.0.0 255.255.0.0 20.0.0.2
R1(config)#ip route 162.14.0.0 255.255.0.0 20.0.0.2
R1(config)#ip route 15.0.0.0 255.0.0.0 20.0.0.2
R1(config)#
R1(config)#
R1(config)#
R1(config)#exit
R1#
*Jul 17 09:25:50.424: %SYS-5-CONFIG_I: Configured from console by c
onsole
R1#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B
- BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter ar
ea
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type
2
      E1 - OSPF external type 1, E2 - OSPF external type 2
```

```
R2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R2(config)#int e0/0
R2(config-if)#ip add 20.0.0.2 255.0.0.0
R2(config-if)#no sh
R2(config-if)#
R2(config-if)#int e0/1
R2(config-if)#ip add 30.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#
R2(config-if)#ip route 10.0.0.0 255.0.0.0
*Jul 17 09:27:49.339: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R2(config-if)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
R2(config)#ip route 162.14.0.0 255.255.0.0 30.0.0.2
R2(config)#ip route 15.0.0.0 255.0.0.0 30.0.0.2
R2(config)#
R2(config)#exit
R2#sh ip
*Jul 17 09:28:47.720: %SYS-5-CONFIG_I: Configured from console by console
R2#sh ip ro
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
```

% Incomplete command.

R3(config)#int e0/0

R3(config-if)#ip add 30.0.0.2 255.0.0.0

R3(config-if)#no sh

R3(config-if)#

R3(config-if)#int e0/1

R3(config-if)#ip add 172.19.0.1 255.255.0.0.0

^

% Invalid input detected at '^' marker.

R3(config-if)#ip add 172.19.0.1 255.255.0.0

R3(config-if)#no sh

R3(config-if)#

R3(config-if)#int e0/2

R3(config-if)#ip add 21.0.0.1 255.0.0.0

R3(config-if)#no sh

R3(config-if)#

R3(config-if)#ip route 15.0.0.0 255.0.0.0 172.19.0.2

R3(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1

R3(config)#ip route 162.14.0.0 255.255.0.0 21.0.0.2

R3(config)#

R3(config)#exit

R3#

\*Jul 17 09:34:01.507: %SYS-5-CONFIG\_I: Configured from console by console

R3#

\*Jul 17 09:34:06.359: %PNP-6-PNP\_DISCOVERY\_STOPPED: PnP Discovery stopped (Config Wizard)

R3#



R4



```
R4#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R4(config)#int e0/0
R4(config-if)#ip add 15.0.0.1 255.0.0.0
R4(config-if)#no sh
R4(config-if)#
R4(config-if)#int e0/1
*Jul 17 09:34:40.915: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R4(config-if)#int e0/1
R4(config-if)#ip add 172.19.0.2 255.255.0.0
R4(config-if)#no sh
R4(config-if)#
R4(config-if)#ip route 10.0.0.0 255.0.0.0 172.19.0.1
R4(config)#ip route 162.14.0.0 255.255.0.0 172.19.0.1
R4(config)#
R4(config)#
R4(config)#end
R4#
*Jul 17 09:36:33.532: %SYS-5-CONFIG_I: Configured from console by console
R4#
```



```
*Jul 17 09:37:47.614: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
Router>en
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#int e0/0
Router(config-if)#ip add 21.0.0.2 255.0.0.0
Router(config-if)#no sh
Router(config-if)#
Router(config-if)#int e0/0
*Jul 17 09:39:20.298: %LINK-3-UPDOWN: Interface Ethernet0/0, changed state to up
*Jul 17 09:39:21.298: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/0, changed state to up
Router(config-if)#int e0/1
Router(config-if)#ip add 192.168.168.1 255.255.255.0
Router(config-if)#no sh
Router(config-if)#
Router(config-if)#
Router(config-if)#ip rou
*Jul 17 09:39:46.649: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Jul 17 09:39:47.649: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/1, changed state to up
Router(config-if)#ip route
Router(config-if)#ip route 10.0.0.0 255.0.0.0 21.0.0.1
Router(config)#ip route 15.0.0.0 255.0.0.0 21.0.0.1
Router(config)#ip route 162.14.0.1 255.255.0.0 192.168.168.2
%Inconsistent address and mask
Router(config)#
Router(config)#
Router(config)#162.14.0.0 255.255.0.0 192.168.168.2
^
```

```
*Jul 17 09:39:47.649: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/1, changed state to up
```

```
Router(config-if)#ip route
```

```
Router(config-if)#ip route 10.0.0.0 255.0.0.0 21.0.0.1
```

```
Router(config)#ip route 15.0.0.0 255.0.0.0 21.0.0.1
```

```
Router(config)#ip route 162.14.0.1 255.255.0.0 192.168.168.2
```

```
%Inconsistent address and mask
```

```
Router(config)#
```

```
Router(config)#
```

```
Router(config)#162.14.0.0 255.255.0.0 192.168.168.2
```

```
^
```

```
% Invalid input detected at '^' marker.
```

```
Router(config)#
```

```
Router(config)#162.14.0.0 255.255.0.0 192.168.168.2
```

```
^
```

```
% Invalid input detected at '^' marker.
```

```
Router(config)#
```

```
Router(config)#ip route 162.14.0.0 255.255.0.0 192.168.168.2
```

```
Router(config)#
```

```
Router(config)#
```

```
Router(config)#
```

```
Router(config)#
```

```
Router(config)#
```

```
Router(config)#exit
```

```
Router#sh
```

```
*Jul 17 09:49:34.381: %SYS-5-CONFIG_I: Configured from console by console
```

```
Router#sh ip ro
```

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
```

```
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
```





R6



```
R6#conf t
```

```
Enter configuration commands, one per line.  End with CNTL/Z.
```

```
R6(config)#int e0/0
```

```
R6(config-if)#ip add 162.14.0.1 255.255.0.0
```

```
R6(config-if)#no sh
```

```
R6(config-if)#
```

```
R6(config-if)#int e0/1
```

```
R6(config-if)#ip add 192.168.168.2 255.255.255.0
```

```
R6(config-if)#no sh
```

```
R6(config-if)#
```

```
R6(config-if)#ip route 10.0.0.0 255.0.0.0 192.168.168.1
```

```
R6(config)#ip route 15.0.0.0 255.0.0.0 192.168.168.1
```

```
R6(config)#end
```

```
R6#
```


```
*Jul 17 09:38:41.261: %SYS-5-CONFIG_I: Configured from console by console
```

```
R6#
```

```
*Jul 17 09:40:52.415: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
```

```
R6#
```



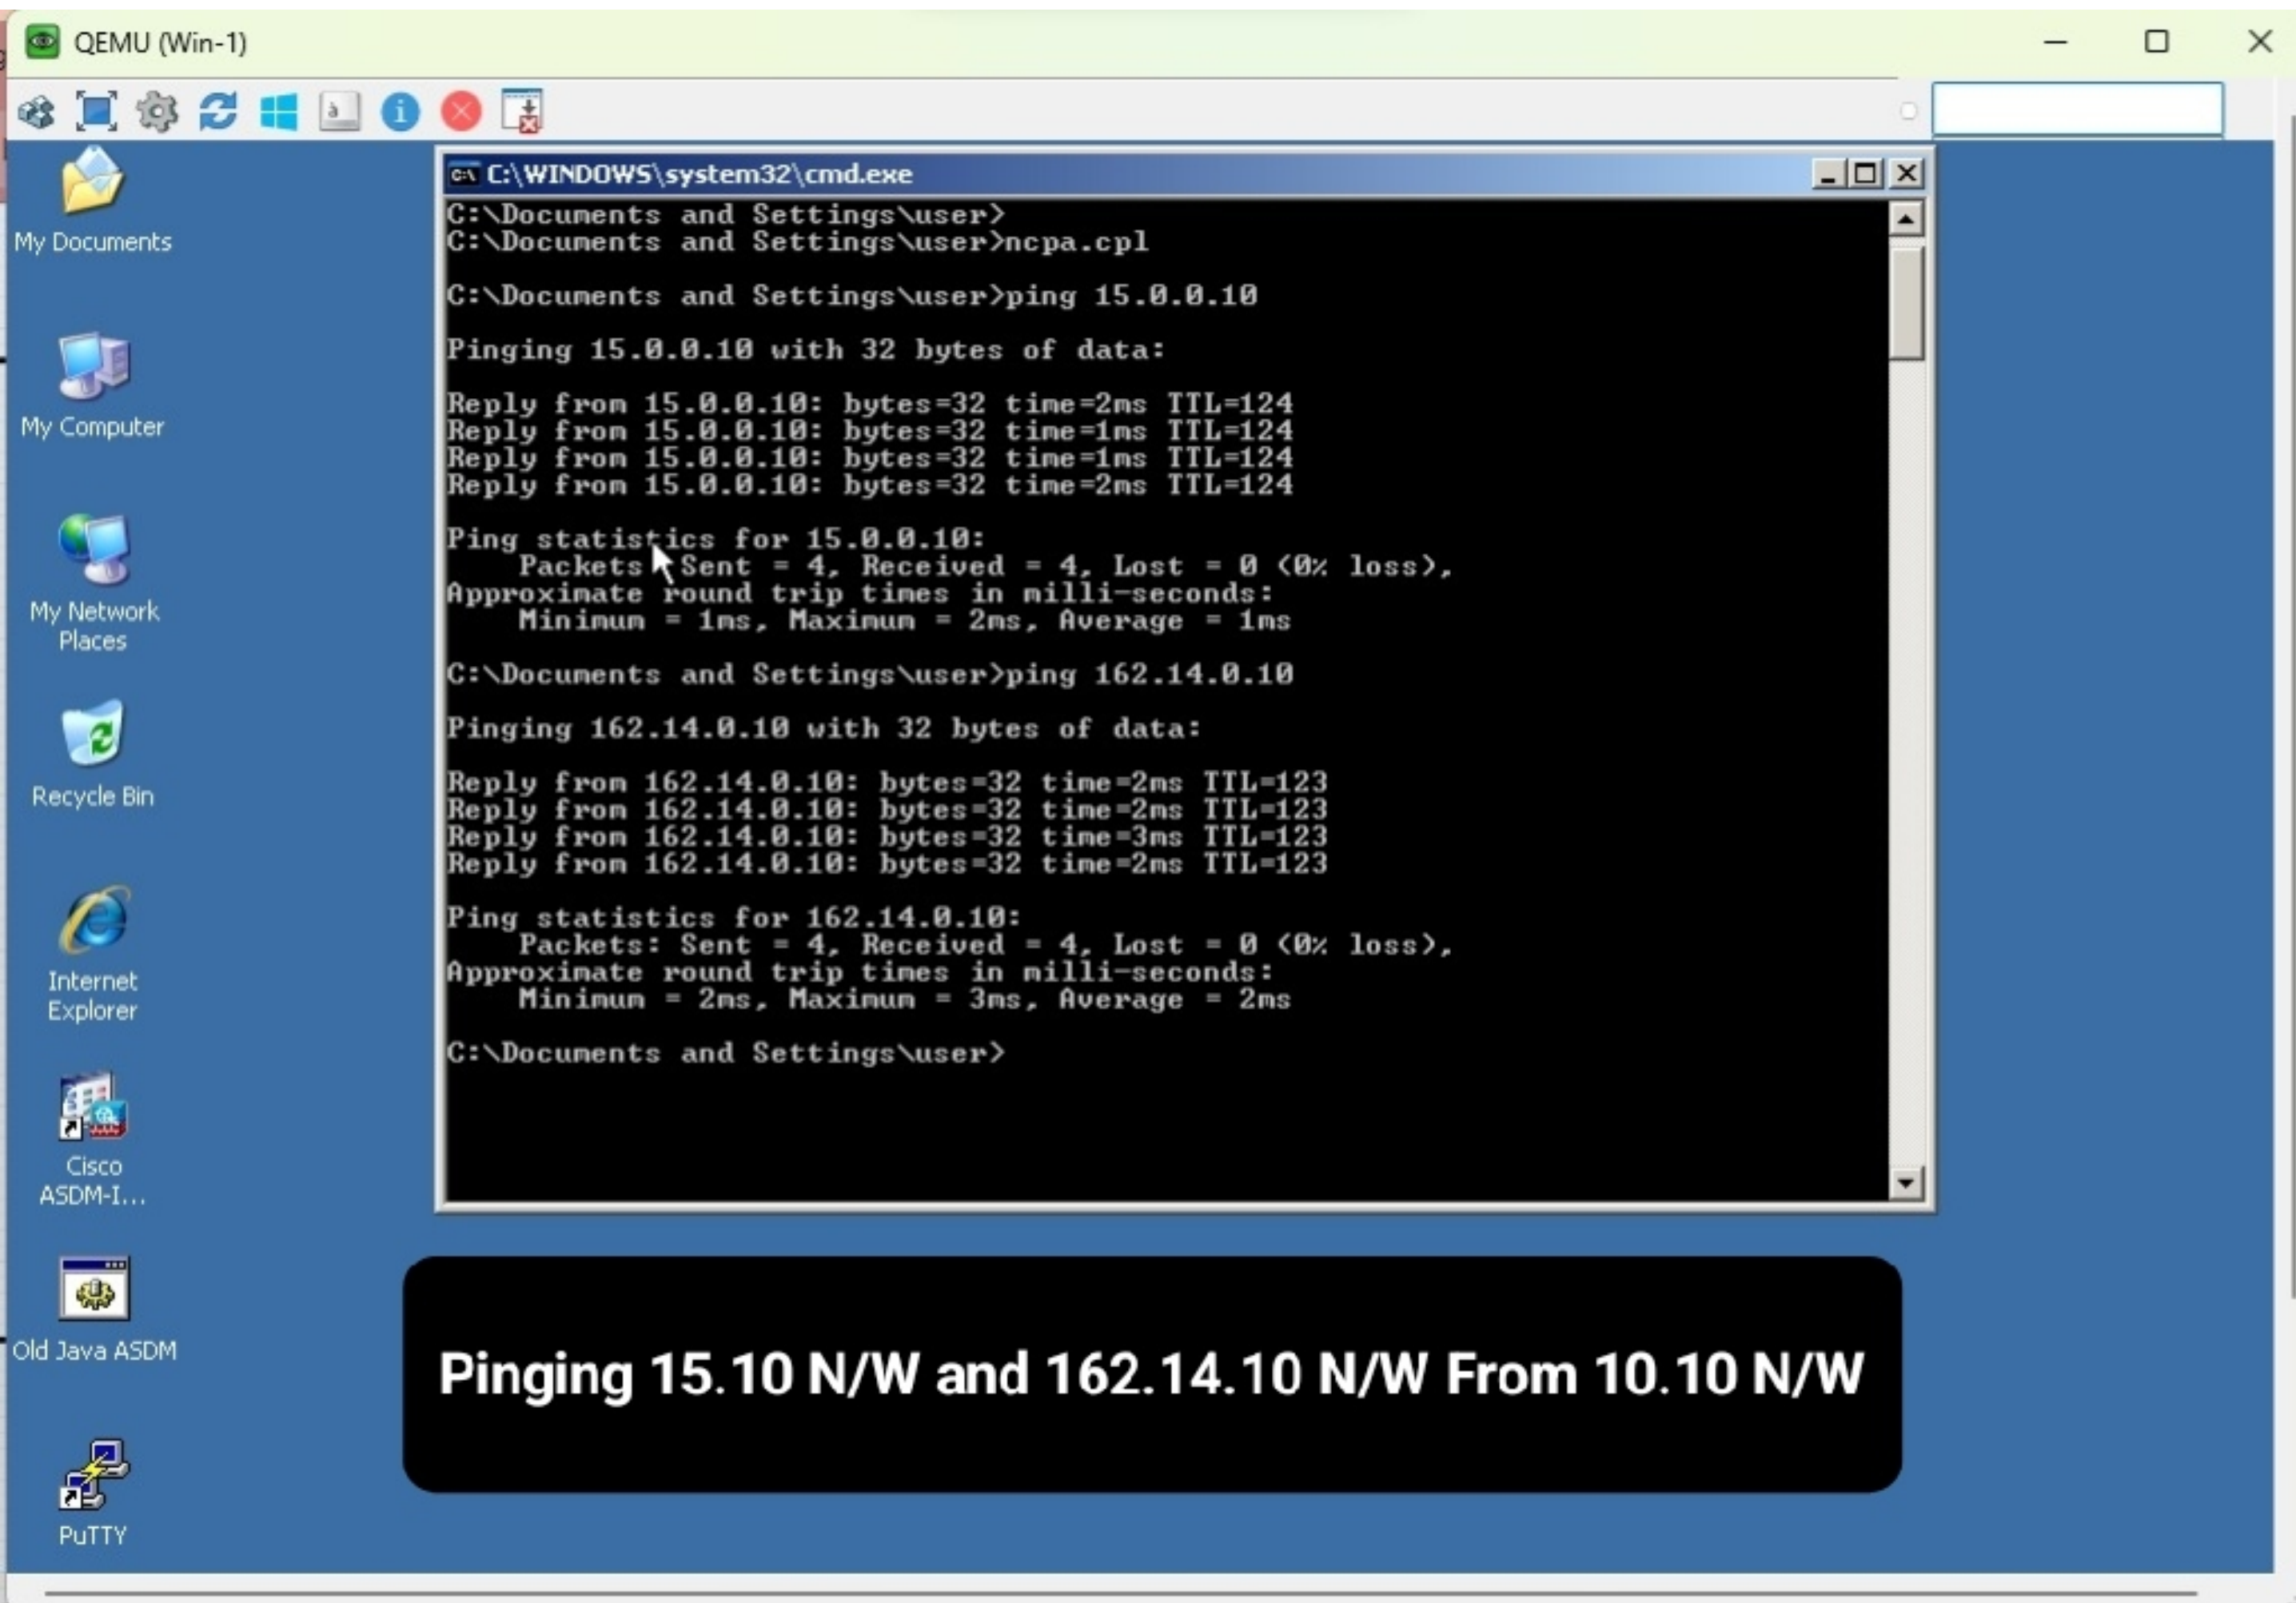



My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-I...

Old Java ASDM

PuTTY

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]  
<C> Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>  
C:\Documents and Settings\user>ncpa.cpl

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=1ms TTL=124  
Reply from 10.0.0.10: bytes=32 time=1ms TTL=124  
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124  
Reply from 10.0.0.10: bytes=32 time=1ms TTL=124

Ping statistics for 10.0.0.10:  
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>ping 162.14.0.10

Pinging 162.14.0.10 with 32 bytes of data:


Reply from 162.14.0.10: bytes=32 time=2ms TTL=124  
Reply from 162.14.0.10: bytes=32 time=1ms TTL=124  
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124  
Reply from 162.14.0.10: bytes=32 time=1ms TTL=124

Ping statistics for 162.14.0.10:  
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>

**Pinging 10.10 N/W and 162.14.10 N/W From 15.10 N/W**



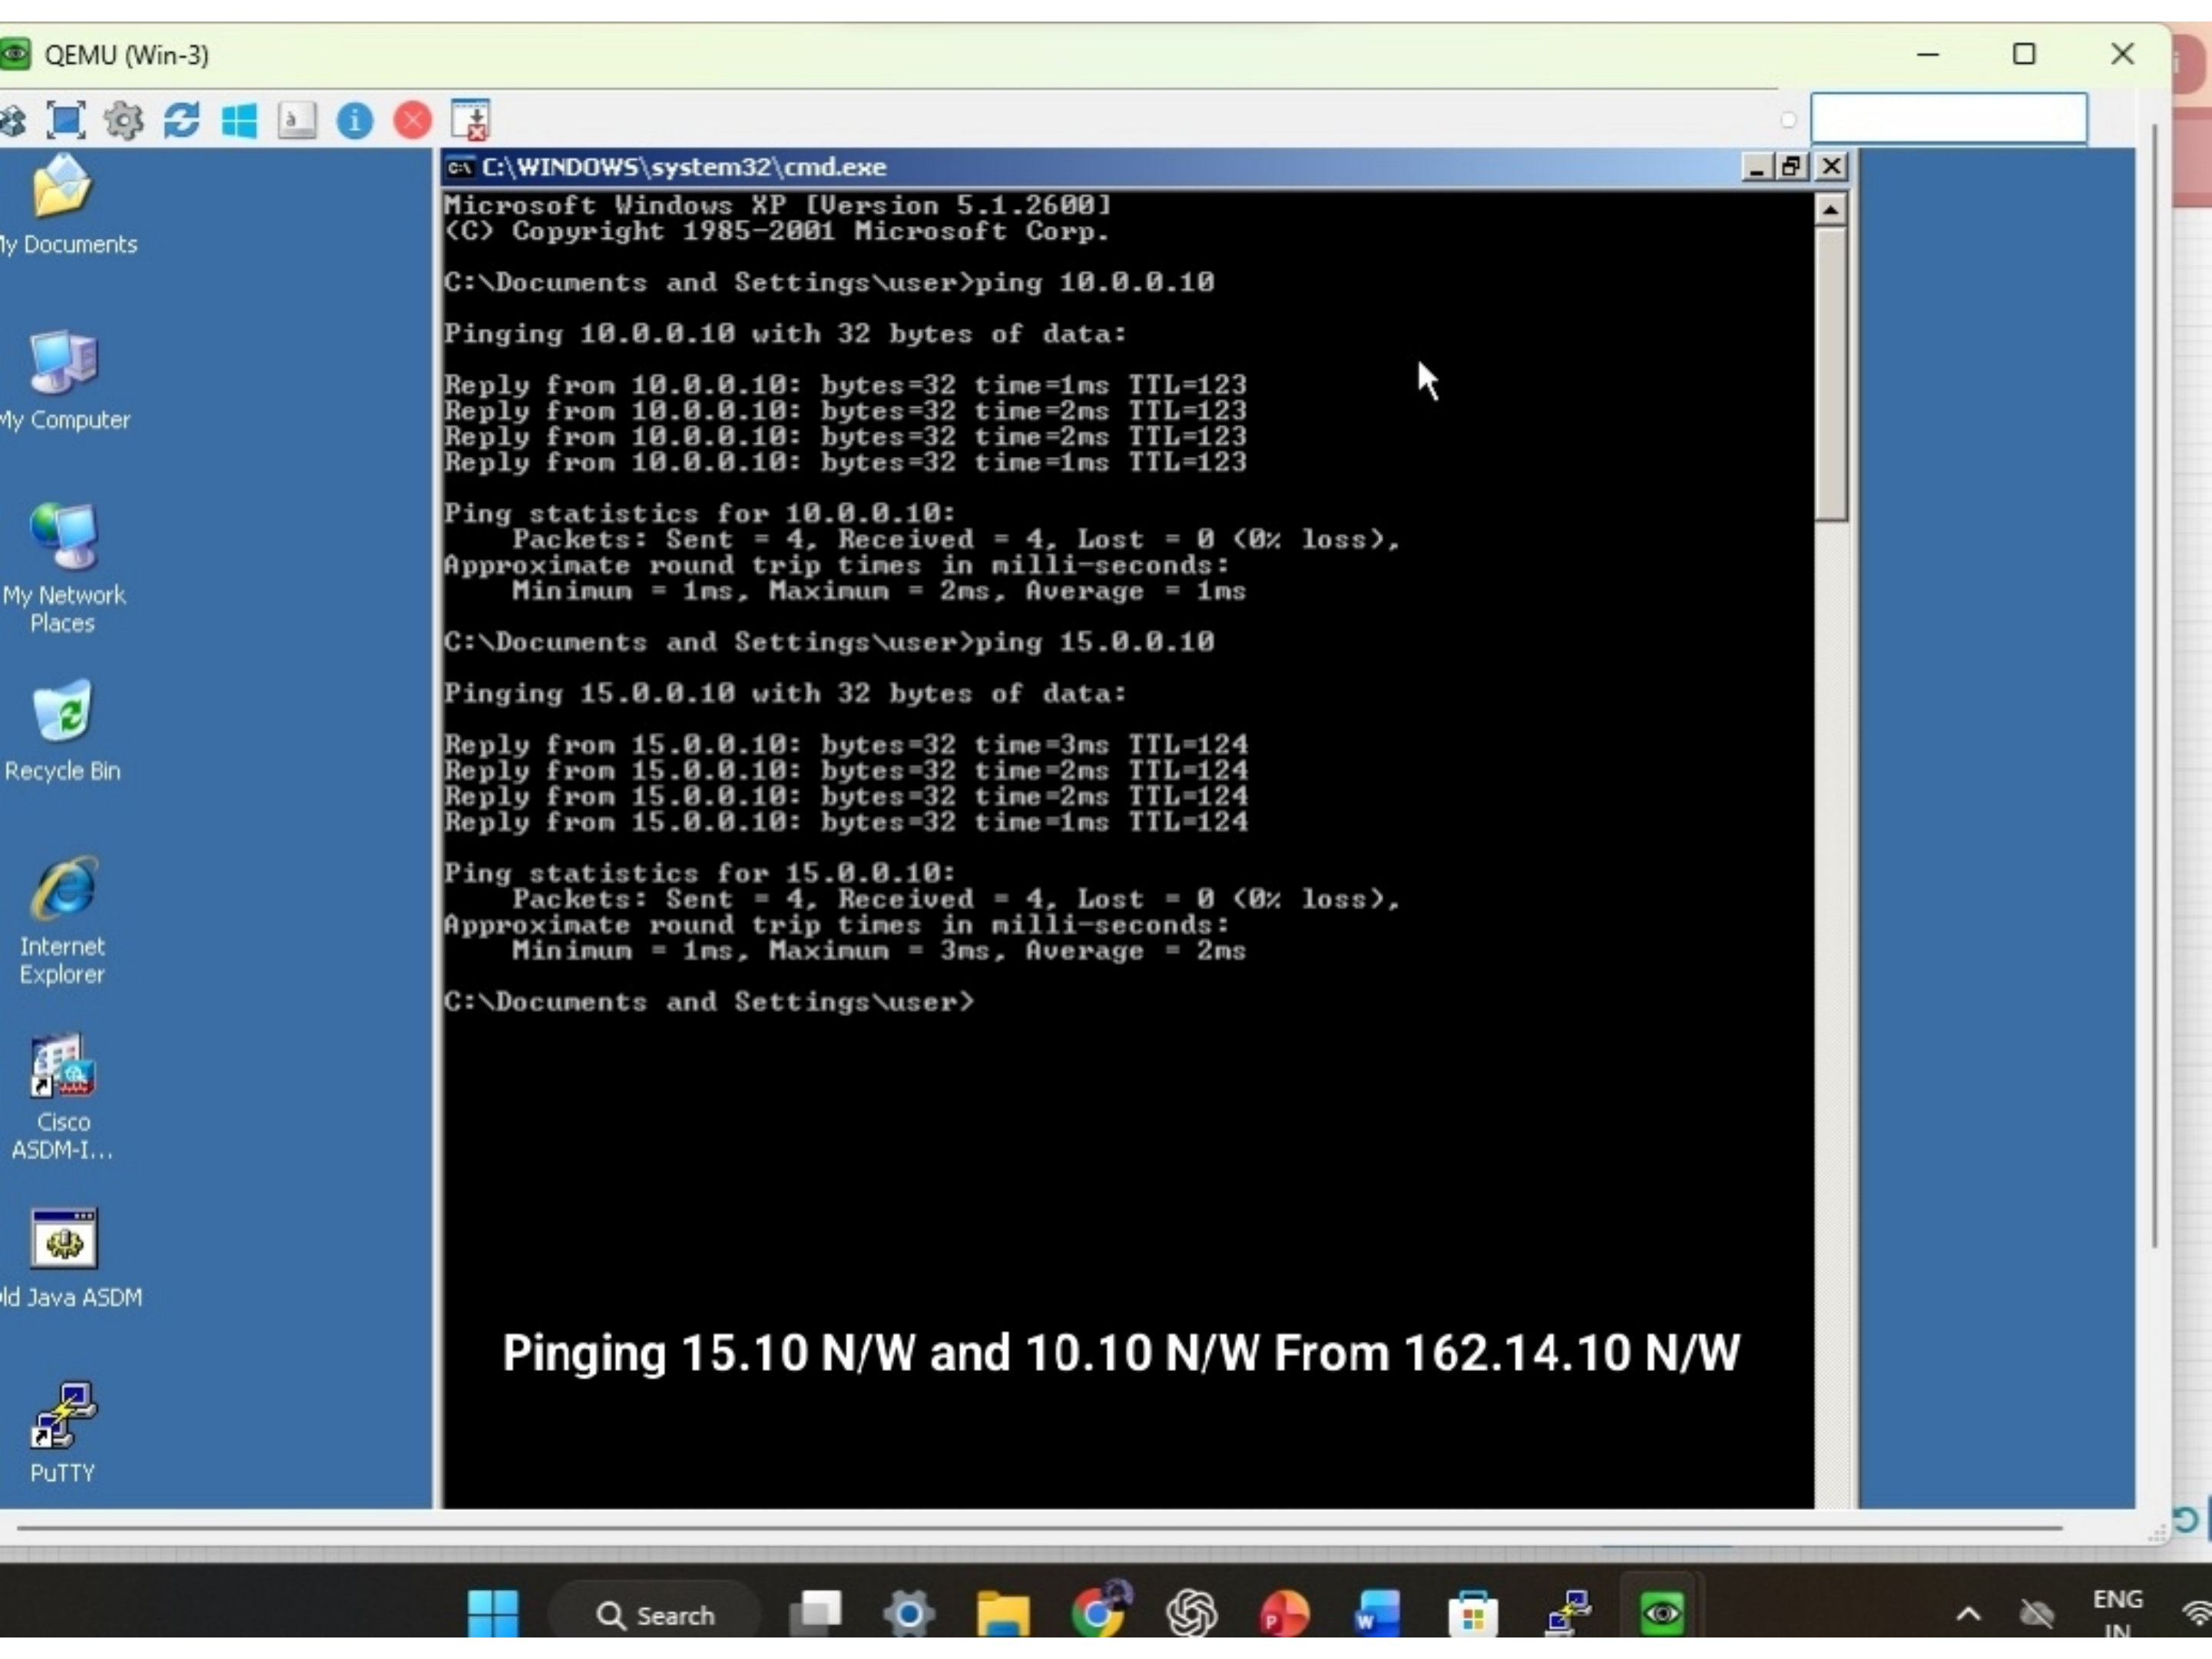

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]  
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=1ms TTL=123  
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123  
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123  
Reply from 10.0.0.10: bytes=32 time=1ms TTL=123

Ping statistics for 10.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>ping 15.0.0.10

Pinging 15.0.0.10 with 32 bytes of data:

Reply from 15.0.0.10: bytes=32 time=3ms TTL=124  
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124  
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124  
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124

Ping statistics for 15.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 1ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>

**Pinging 15.10 N/W and 10.10 N/W From 162.14.10 N/W**