


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 626, y: 1
Root
21:53:00
PC-PT
PC1
Fa0
Fa0/2
PC-PT
PC0
Fa0
Fa0/1
2960-24TT
Switch0
Fa0/3
Fa0/0
Fa0/1
2621XM
Router0
Fa0/0
Fa0/1
2621XM
Router1
Fa0/0
Fa0/1
2621XM
Router2
Fa0/1
Fa0/2
Fa0/3
2960-24TT
Switch1
PC-PT
Fa0
Fa0
C3
Time: 00:42:42
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

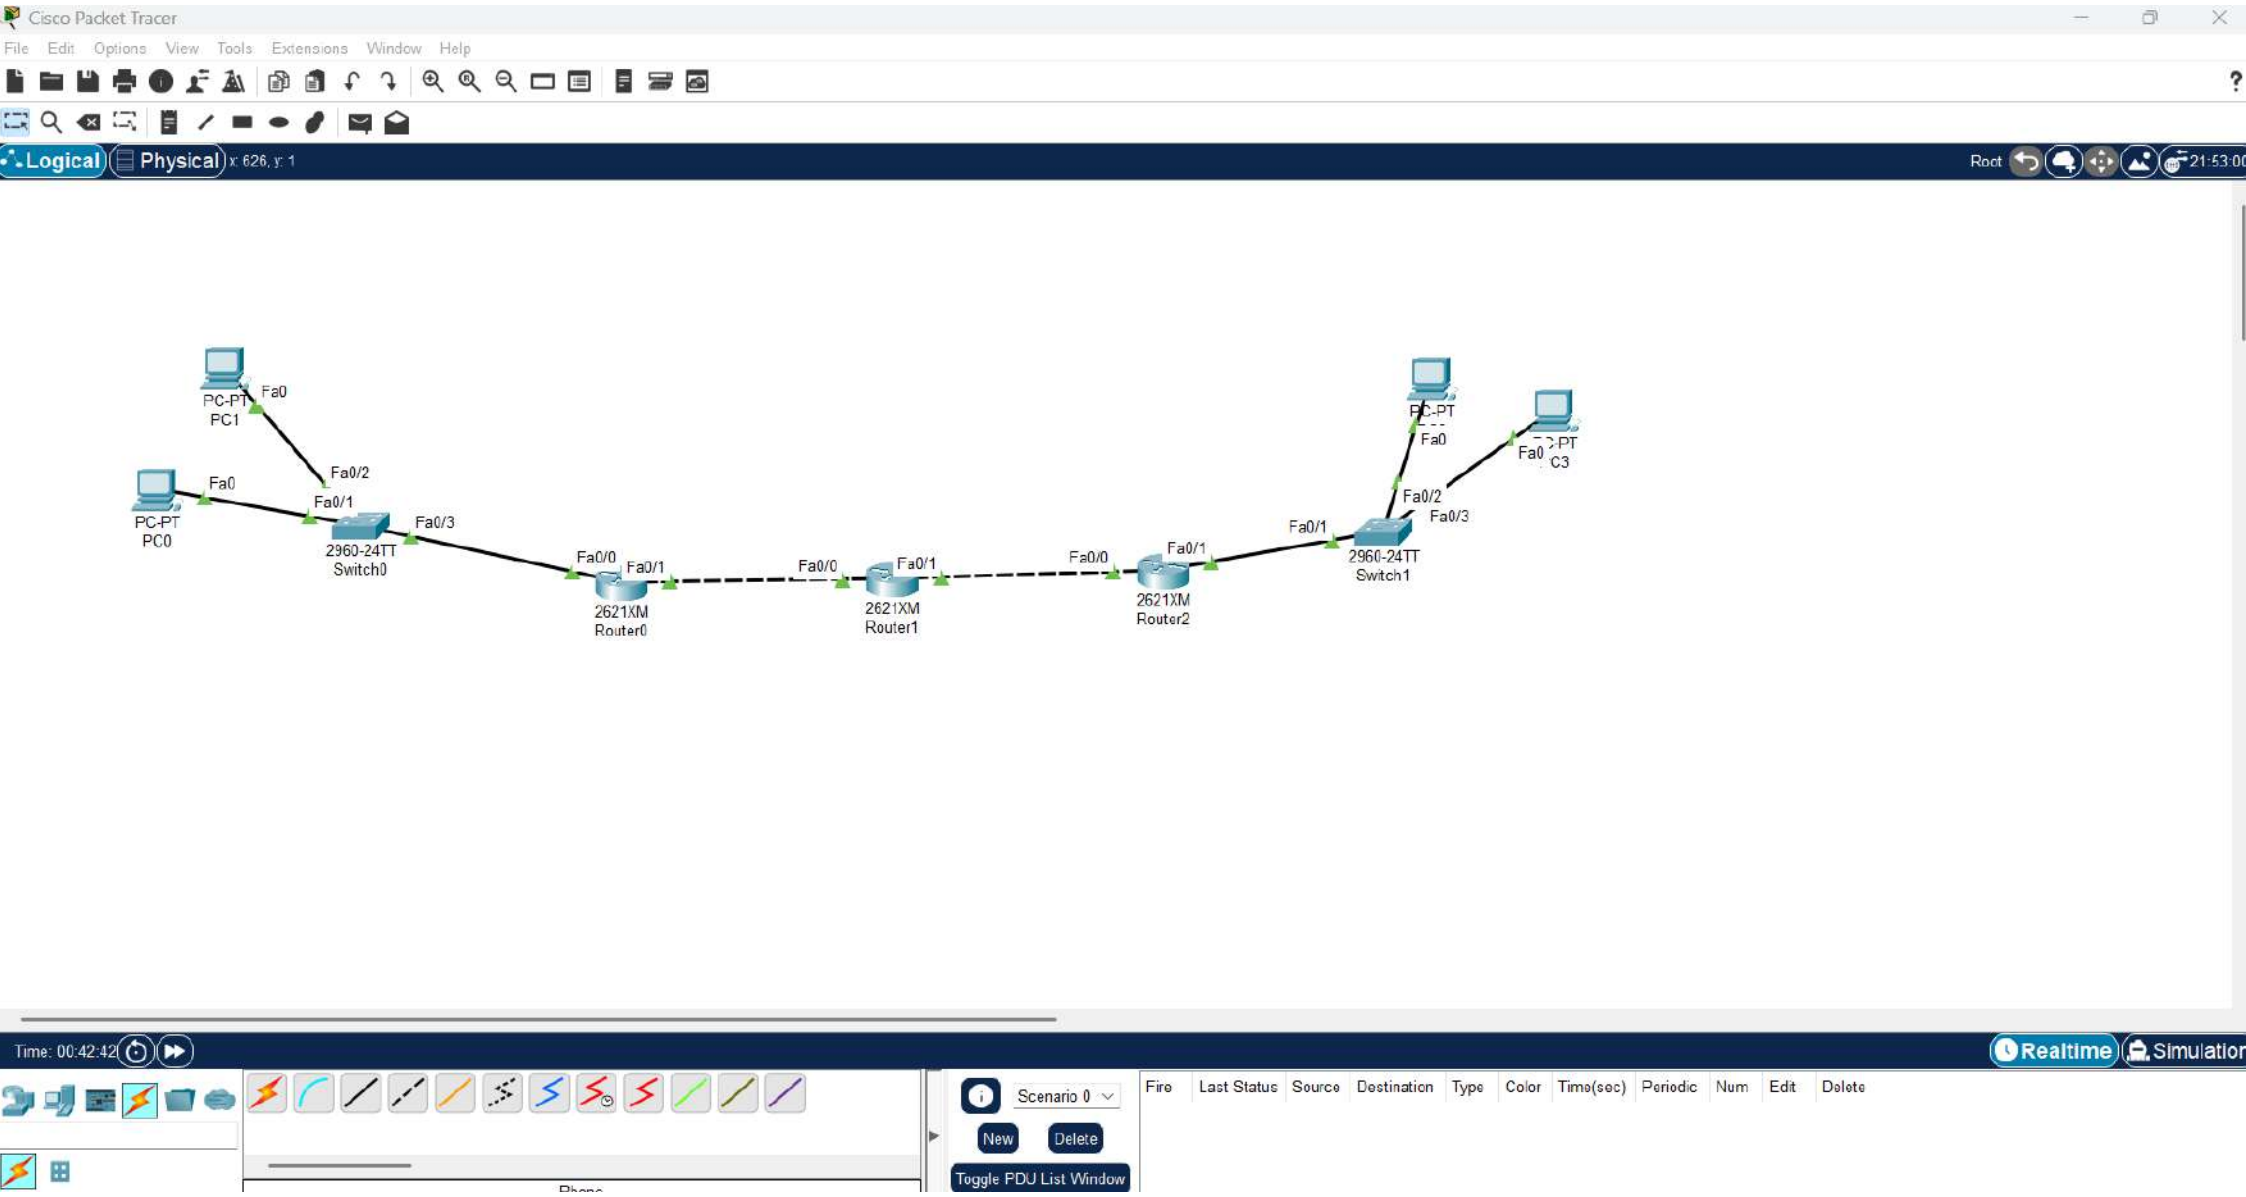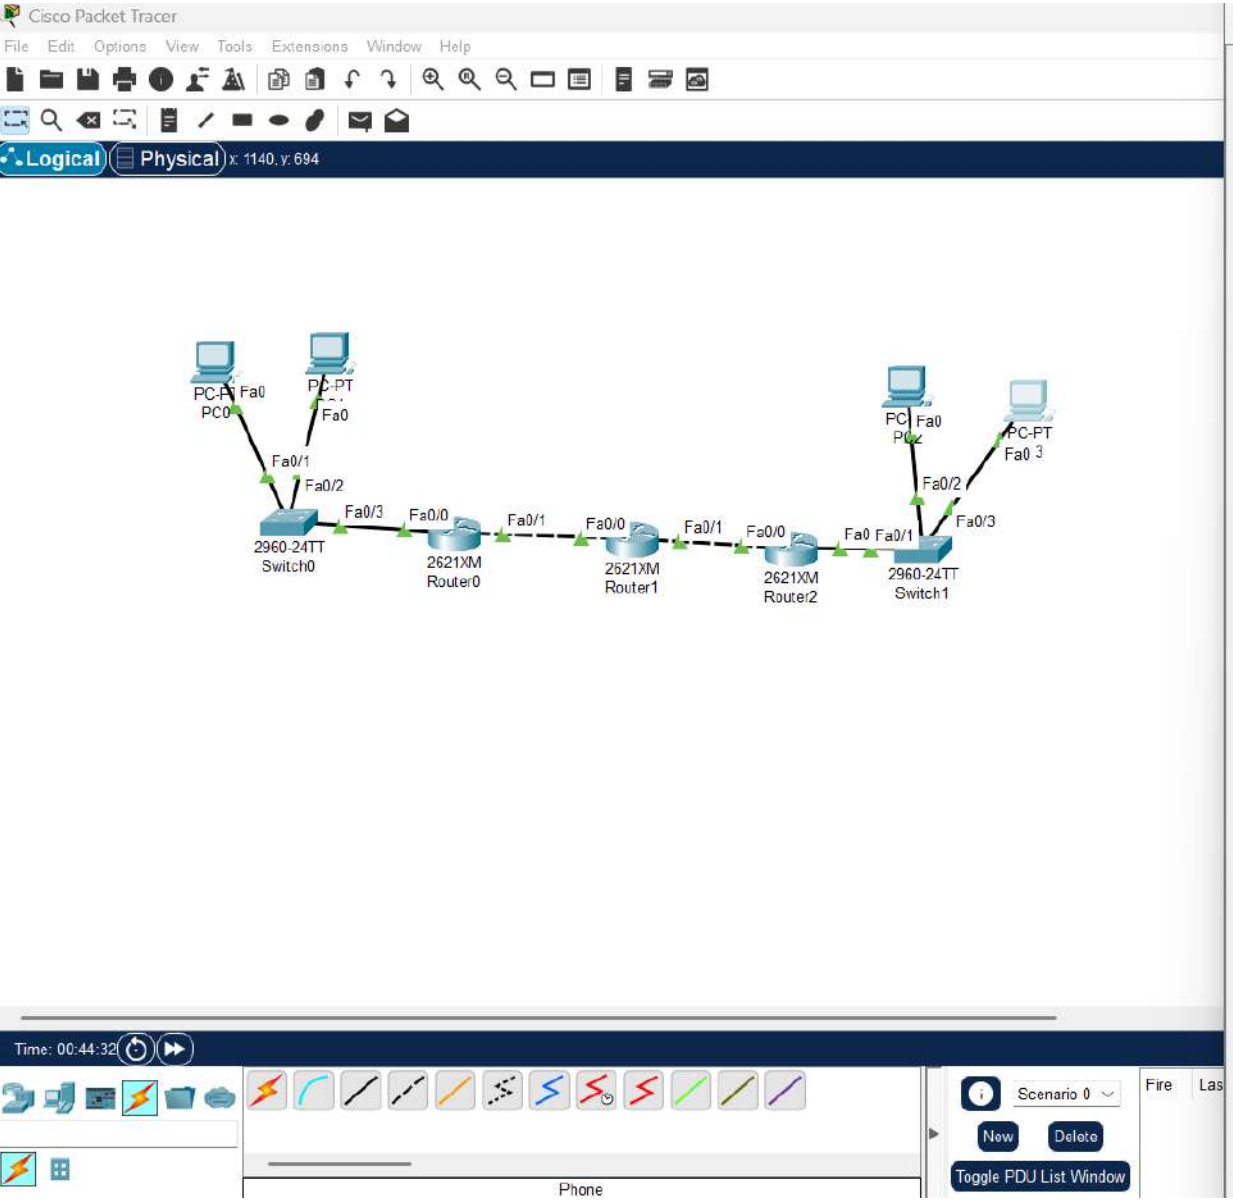

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
C:\>
C:\>
C:\>ipconfig

FastEthernet0 Connection:(default port)

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: FE80::2E0:F9FF:FE41:EDD3
   IPv6 Address.....: ::
   IPv4 Address.....: 10.0.0.10
   Subnet Mask.....: 255.0.0.0
   Default Gateway.....: ::
                                 10.0.0.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address.....: ::
   IPv4 Address.....: 0.0.0.0
   Subnet Mask.....: 0.0.0.0
   Default Gateway.....: ::
                                 0.0.0.0

C:\>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Reply from 40.0.0.10: bytes=32 time=3ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 3ms, Average = 1ms

C:\>ping 40.0.0.11

Pinging 40.0.0.11 with 32 bytes of data:

Reply from 40.0.0.11: bytes=32 time<1ms TTL=125
Reply from 40.0.0.11: bytes=32 time<1ms TTL=125
Reply from 40.0.0.11: bytes=32 time=2ms TTL=125
Reply from 40.0.0.11: bytes=32 time=1ms TTL=125

Ping statistics for 40.0.0.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 2ms, Average = 0ms


C:\>
```

Top

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 684, y: 615

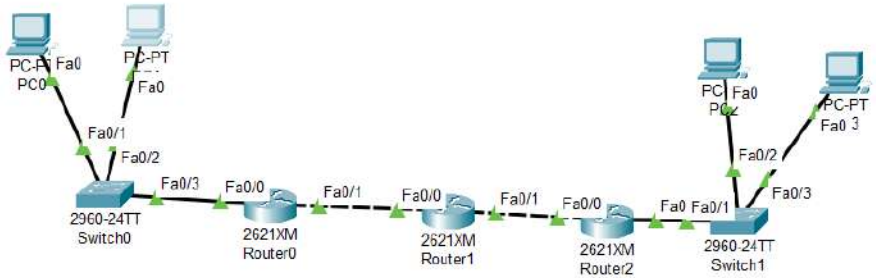

Time: 00:44:46

Phone

Scenario 0

New Delete

Toggle PDU List Window

Fire

PC1

Physical Config Desktop Programming Attributes

Command Prompt X

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection:(default port)

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: FE80::230:F2FF:FE01:B5CE
   IPv6 Address.....: ::
   IPv4 Address.....: 10.0.0.11
   Subnet Mask.....: 255.0.0.0
   Default Gateway.....: ::
                                 10.0.0.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address.....: ::
   IPv4 Address.....: 0.0.0.0
   Subnet Mask.....: 0.0.0.0
   Default Gateway.....: ::
                                 0.0.0.0

C:\>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=1ms TTL=125
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 40.0.0.11

Pinging 40.0.0.11 with 32 bytes of data:

Reply from 40.0.0.11: bytes=32 time<1ms TTL=125
Reply from 40.0.0.11: bytes=32 time<1ms TTL=125
Reply from 40.0.0.11: bytes=32 time<1ms TTL=125
Reply from 40.0.0.11: bytes=32 time<1ms TTL=125

Ping statistics for 40.0.0.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>
```

Top

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 763, y: 190

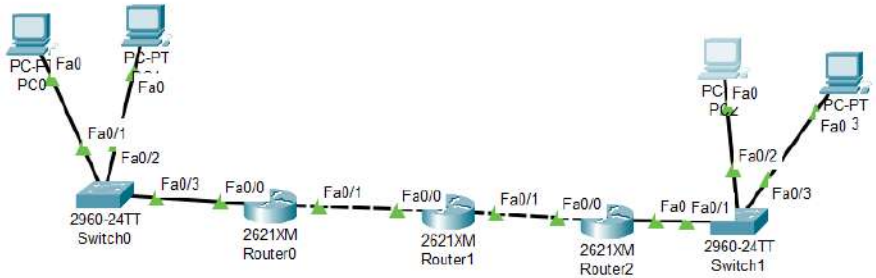

Time: 00:45:12

Scenario 0

New Delete

Toggle PDU List Window

Fire

Phone

PC2

Physical Config Desktop Programming Attributes

Command Prompt X

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time<1ms TTL=125
Reply from 10.0.0.10: bytes=32 time<1ms TTL=125
Reply from 10.0.0.10: bytes=32 time<1ms TTL=125
Reply from 10.0.0.10: bytes=32 time<1ms TTL=125

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ipconfig

FastEthernet0 Connection:(default port)

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: FE80::20A:F3FF:FE3C:6594
   IPv6 Address.....: ::
   IPv4 Address.....: 40.0.0.10
   Subnet Mask.....: 255.0.0.0
   Default Gateway.....: ::
                                 40.0.0.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address.....: ::
   IPv4 Address.....: 0.0.0.0
   Subnet Mask.....: 0.0.0.0
   Default Gateway.....: ::
                                 0.0.0.0

C:\>ping 10.0.0.11

Pinging 10.0.0.11 with 32 bytes of data:

Request timed out.
Reply from 10.0.0.11: bytes=32 time=1ms TTL=125
Reply from 10.0.0.11: bytes=32 time<1ms TTL=125
Reply from 10.0.0.11: bytes=32 time<1ms TTL=125

Ping statistics for 10.0.0.11:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms


C:\>
```

Top

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 796, y: 499

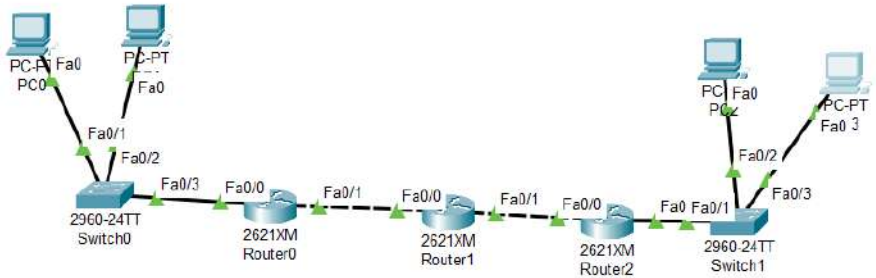

Time: 00:46:03

Scenario 0

New Delete

Toggle PDU List Window

Fire

Phone

PC3

Physical Config Desktop Programming Attributes

Command Prompt X

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection:(default port)

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: FE80::2E0:A3FF:FE2A:1518
   IPv6 Address.....: ::
   IPv4 Address.....: 40.0.0.11
   Subnet Mask.....: 255.0.0.0
   Default Gateway.....: ::
                                 40.0.0.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address.....: ::
   IPv4 Address.....: 0.0.0.0
   Subnet Mask.....: 0.0.0.0
   Default Gateway.....: ::
                                 0.0.0.0

C:\>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time<1ms TTL=125
Reply from 10.0.0.10: bytes=32 time<1ms TTL=125
Reply from 10.0.0.10: bytes=32 time<1ms TTL=125
Reply from 10.0.0.10: bytes=32 time<1ms TTL=125

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 10.0.0.11

Pinging 10.0.0.11 with 32 bytes of data:

Reply from 10.0.0.11: bytes=32 time<1ms TTL=125
Reply from 10.0.0.11: bytes=32 time<1ms TTL=125
Reply from 10.0.0.11: bytes=32 time<1ms TTL=125
Reply from 10.0.0.11: bytes=32 time<1ms TTL=125

Ping statistics for 10.0.0.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>
```

Top

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 591, y: 144

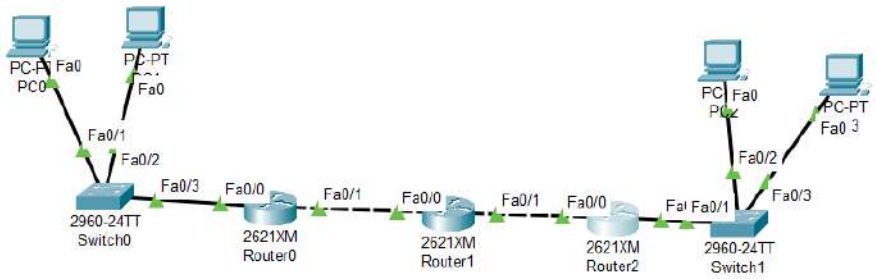

Time: 00:46:40

Scenario 0

New Delete

Toggle PDU List Window

Fire

Router2

Physical Config CLI Attributes

IOS Command Line Interface

```
       P - periodic downloaded static route

Gateway of last resort is not set

C    30.0.0.0/8 is directly connected, FastEthernet0/0
C    40.0.0.0/8 is directly connected, FastEthernet0/1

Router#ip route 10.0.0.0 255.0.0.0 30.0.0.1
         ^
% Invalid input detected at '^' marker.

Router#config terminl
               ^
% Invalid input detected at '^' marker.

Router#config terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.01
Router(config)#no ip route 10.0.0.0 255.0.0.0 30.0.0.01
Router(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
Router(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1
Router(config)#
Router(config)#
Router(config)#^Z
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
C    30.0.0.0/8 is directly connected, FastEthernet0/0
C    40.0.0.0/8 is directly connected, FastEthernet0/1

Router#show  ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
FastEthernet0/0        30.0.0.2        YES manual up                    up
FastEthernet0/1        40.0.0.1        YES manual up                    up
Router#
```


Copy Paste

Top

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 642, y: 274

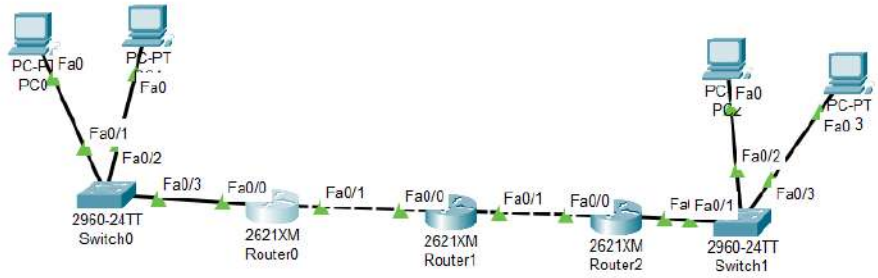

Time: 00:47:03

Scenario 0

New Delete

Toggle PDU List Window

Fire Last S

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
Router>
Router>
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#add route 30.0.0.0 255.0.0.0 20.0.0.1
                  ^
% Invalid input detected at '^' marker.

Router(config)#add route 30.0.0.0 255.0.0.0 20.0.^Z
Router#
%SYS-5-CONFIG_I: Configured from console by console
^Z
Router#^Z
Router#congig terminal
              ^
% Invalid input detected at '^' marker.

Router#config terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2
Router(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
Router(config)#
Router(config)#
Router(config)#
Router(config)#^Z
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    20.0.0.0/8 is directly connected, FastEthernet0/1
S    30.0.0.0/8 [1/0] via 20.0.0.2
S    40.0.0.0/8 [1/0] via 20.0.0.2

Router#
Router#
Router#
```

Copy Paste

Top