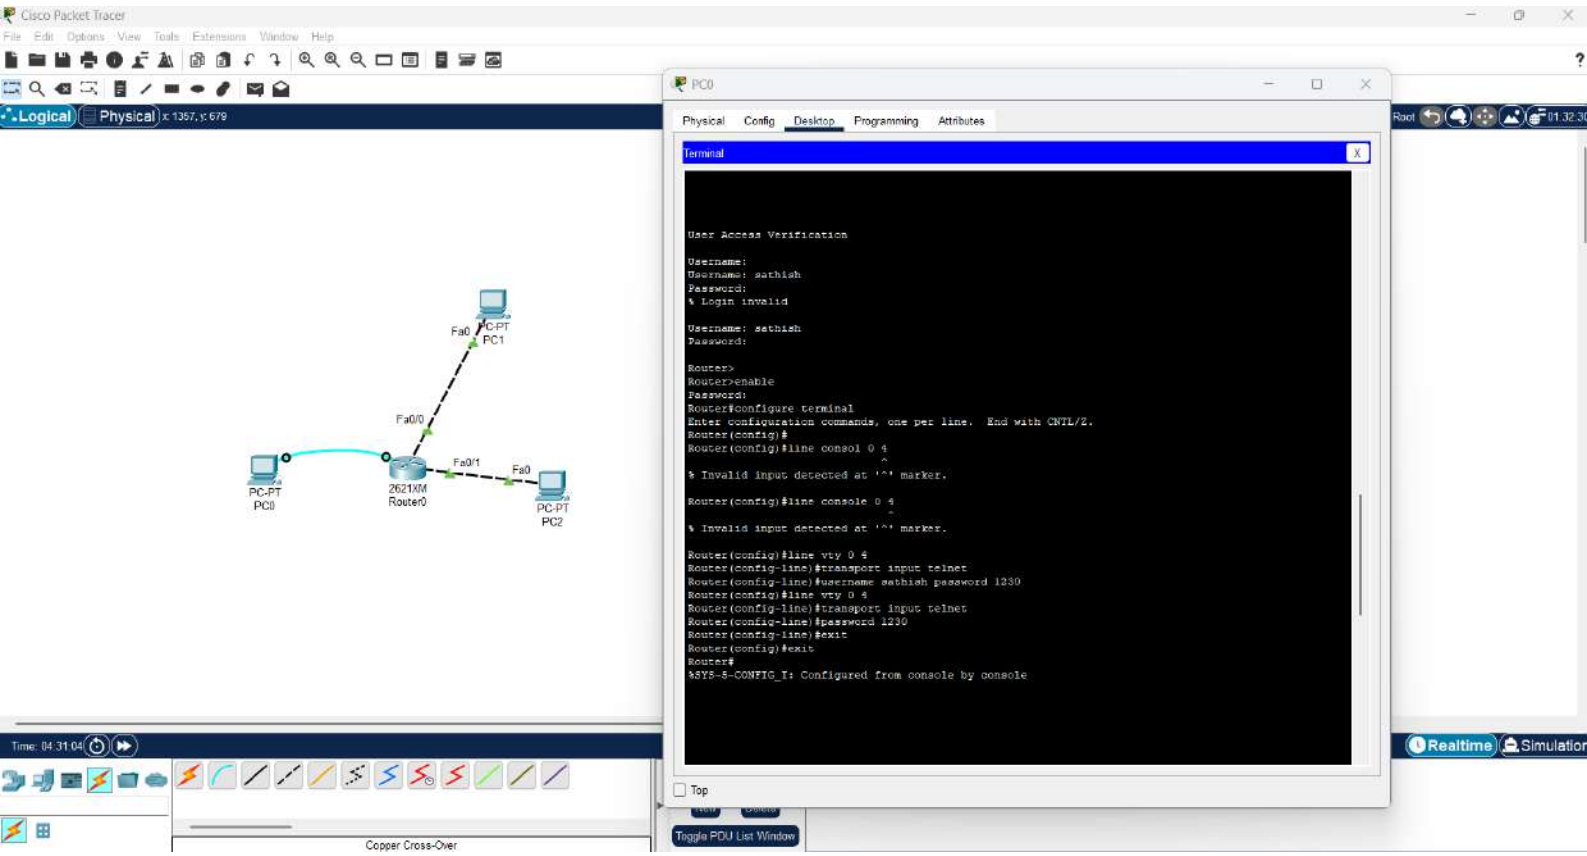
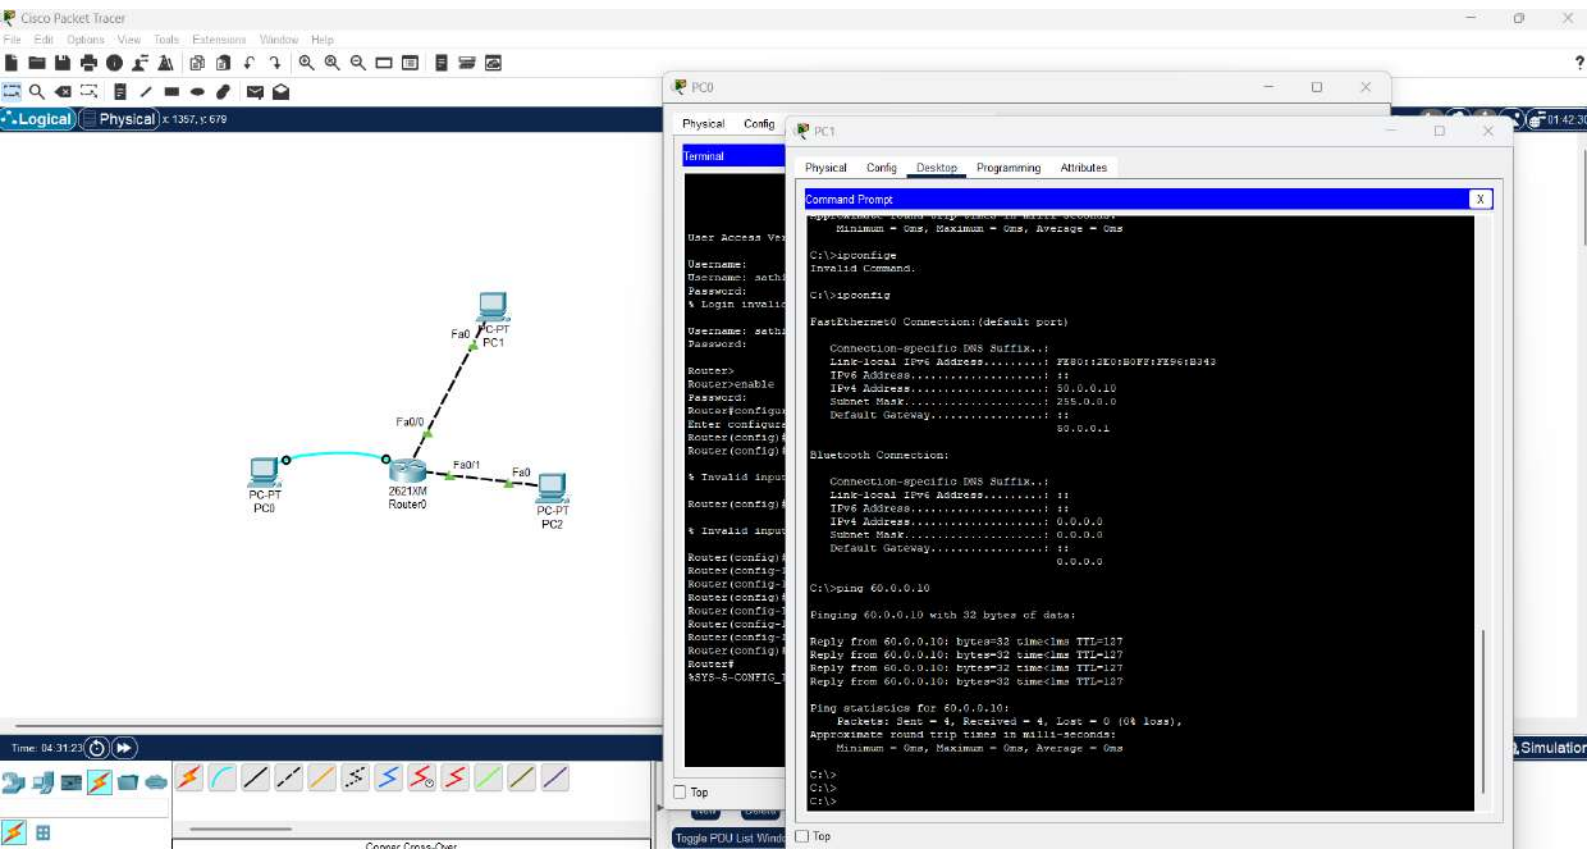
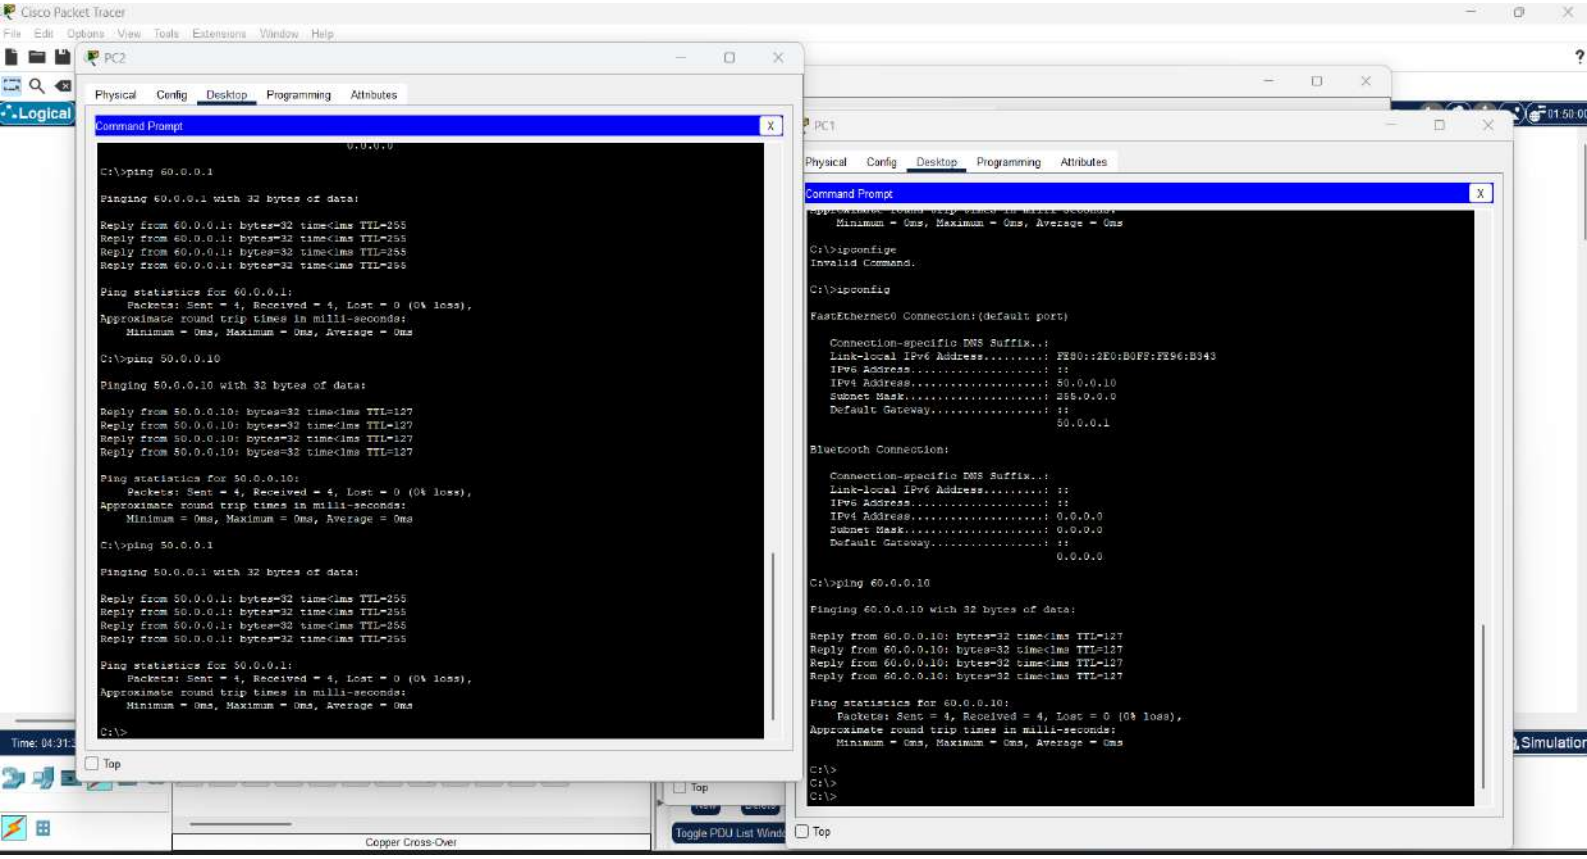

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 1357, y: 679
PC0
Physical Config Desktop Programming Attributes
Terminal
User Access Verification
Username:
Username: sathish
Password:
% Login invalid
Username: sathish
Password:
Router>
Router>enable
Password:
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#line consol 0 4
% Invalid input detected at '^' marker.
Router(config)#line console 0 4
% Invalid input detected at '^' marker.
Router(config)#line vty 0 4
Router(config-line)#transport input telnet
Router(config-line)#username sathish password 1230
Router(config)#line vty 0 4
Router(config-line)#transport input telnet
Router(config-line)#password 1230
Router(config-line)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_T: Configured from console by console
Top
Toggle PDU List Window
PC-PT PC1
PC-PT PC0
PC-PT PC2
2621XM Router0
Fa0
Fa0/0
Fa0/1
Time: 04:31:04
Realtime
Simulation
Copper Cross-Over


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 1357, y: 679
PC-PT PC1
Fa0
Fa0/0
Fa0/1
Fa0
PC-PT PC0
2621XM Router0
PC-PT PC2
PC0
Physical Config
Terminal
User Access Ver
Username:
Username: sathi
Password:
% Login invalid
Username: sathi
Password:
Router>
Router>enable
Password:
Router#configur
Enter configura
Router(config)#
Router(config)#
% Invalid input
Router(config)#
% Invalid input
Router(config)#
Router(config-l
Router(config-l
Router(config)#
Router(config-l
Router(config-l
Router(config-l
Router(config)#
Router#
%SYS-5-CONFIG_I
Top
PC1
Physical Config Desktop Programming Attributes
Command Prompt
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ipconfige
Invalid Command.
C:\>ipconfig
FastEthernet0 Connection:(default port)
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: FE80::2E0:B0FF:FE96:B343
IPv6 Address.....: ::
IPv4 Address.....: 60.0.0.10
Subnet Mask.....: 255.0.0.0
Default Gateway.....: ::
60.0.0.1
Bluetooth Connection:
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
C:\>ping 60.0.0.10
Pinging 60.0.0.10 with 32 bytes of data:
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Ping statistics for 60.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
C:\>
C:\>
Top
Time: 04:31:23
Toggle PDU List Wind
Copper Cross-Over


Cisco Packet Tracer
PC2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
C:\>ping 60.0.0.1
Pinging 60.0.0.1 with 32 bytes of data:
Reply from 60.0.0.1: bytes=32 time<1ms TTL=255
Reply from 60.0.0.1: bytes=32 time<1ms TTL=255
Reply from 60.0.0.1: bytes=32 time<1ms TTL=255
Reply from 60.0.0.1: bytes=32 time<1ms TTL=255
Ping statistics for 60.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 50.0.0.10
Pinging 50.0.0.10 with 32 bytes of data:
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Ping statistics for 50.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 50.0.0.1
Pinging 50.0.0.1 with 32 bytes of data:
Reply from 50.0.0.1: bytes=32 time<1ms TTL=255
Reply from 50.0.0.1: bytes=32 time<1ms TTL=255
Reply from 50.0.0.1: bytes=32 time<1ms TTL=255
Reply from 50.0.0.1: bytes=32 time<1ms TTL=255
Ping statistics for 50.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
PC1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ipconfige
Invalid Command.
C:\>ipconfig
FastEthernet0 Connection:(default port)
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: FE80::2E0:B0FF:FE96:B343
IPv6 Address.....: ::
IPv4 Address.....: 50.0.0.10
Subnet Mask.....: 255.0.0.0
Default Gateway.....: ::
50.0.0.1
Bluetooth Connection:
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
C:\>ping 60.0.0.10
Pinging 60.0.0.10 with 32 bytes of data:
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Ping statistics for 60.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
C:\>
C:\>
Top
Copper Cross-Over
Toggle PDU List Wind
Simulation