

T98 NON AI

4GTrafficrecorder (LTECAT1/GNSS)

4G LTE real-time networked dashcam supports real-time satellite positioning and real-time video recording. Video and alarm data can be uploaded remotely to solve the vehicle anti-theft, anti-scratch collision, the occurrence of the above accident, the first time to report to the platform and the owner




productdescription

Physicalspecification	
Dimensions	105mm*86mm*32mm
Weight	240g
Module	
Name	RC10E
Technology	LTETCat1/GNSS
GNSS	
GNSS	GPS,GLONASS,GALILEO,BEIDOU,AGPS,QZSS,SBAS
Receiver	64channel
TrackingSensitivity	-160dB
PositionAccuracy	<2.0mCEP
VelocityAccuracy	<0.1m/s
HotStart	<1s
WarmStart	<4s
ColdStart	<28s
Cellular	
Technology	LTETCat1
4GLTETCat1bands	LTETFDD:B1/B3/B5/B8/B34 LTETDDB38/B39/B40/B41
Datatransfer	LTE:Max10Mbps(DL)/Max5Mbps(UL)
Datasupport	SMS(TXT/PDU)
Power	
InputVoltagerange	9–36VDC
Power Consumption	At12V<6mA(OnlineSleep)At12V<150mA(Normal) At12V<270mA(Fullload)
Operatingenvironment	
OperatingTemperature	-20°Cto+70°C
StorageTemperature	-40°Cto+85°C


OperatingHumidity	5%to95%\non-condensing
Interface	
DigitalInputs	2
GNSSAntenna	InternalHighGain
CellularAntenna	Internal4GHighGain
LEDIndication	3statusLEDlights
SIM	Micro-SIM

Systemstructure	linux
Chip	HC1723C
Resolution	2.0MP
SensorResolution	1920*1080
Lens	Forward:3.6MMbackward:2.8MM
Viewangle	Forward:110° Dbackward:140° D
Pan-til	Forward:50° backward:40°
Videocompressionstandard	H.265(default)/H26425FPS
Videoformat	MP4
Electronicshutter	Auto
Backlightcompensation	Support
AudioIn	Mic(G711_A)
AudioOut	speaker
Storage	TFCard（Max128G）

function	
Videorecording	After the device is powered on, the system automatically starts recording videos. 1080P resolution HD loop video
4Gcommunication	The device can upload data information, video, driving track, vehicle alarm and soon through the mobile network
Real-time positioning	GPS&BD dual mode positioning can record vehicle trajectory
Vibrational alarm	After extinguishing (ACC off) the vehicle vibration is detected, a vehicle vibrational alarm is immediately triggered and uploaded to the platform, at the same time, a photo is uploaded, and the wake up device recording lasts for five minutes
Collision alarm	In the process of driving, if there is a vehicle collision, a vehicle collision alarm should be immediately started and uploaded to the platform, and the first 10s to 5s video should be pushed to the platform.

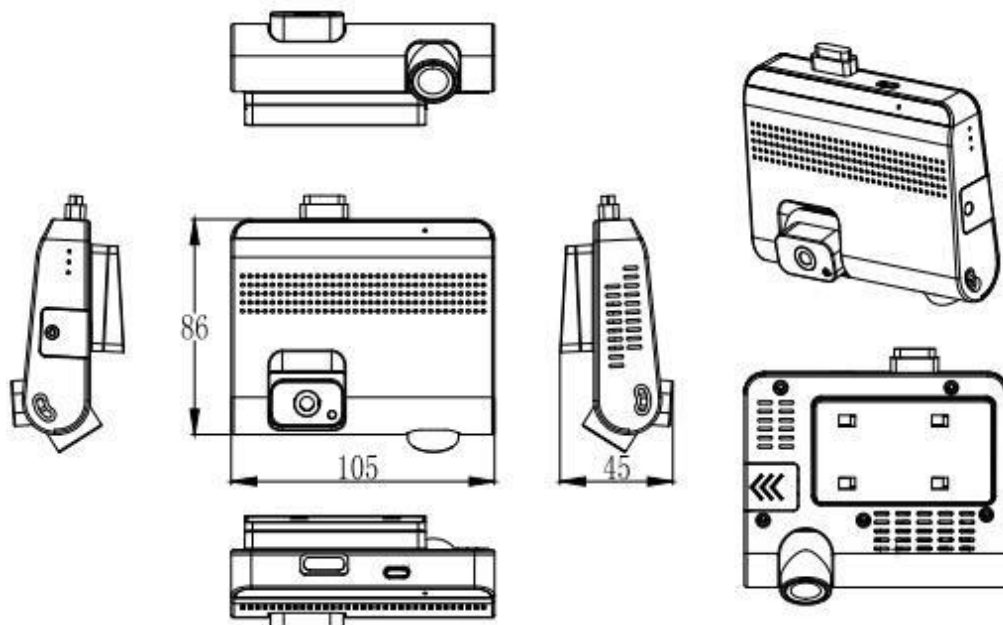


ProductDisplay



NO	Colour	Interfacedefinition
1	Red	Power+
2	Black	PowerGND
3	Orange	ACC

Installation location

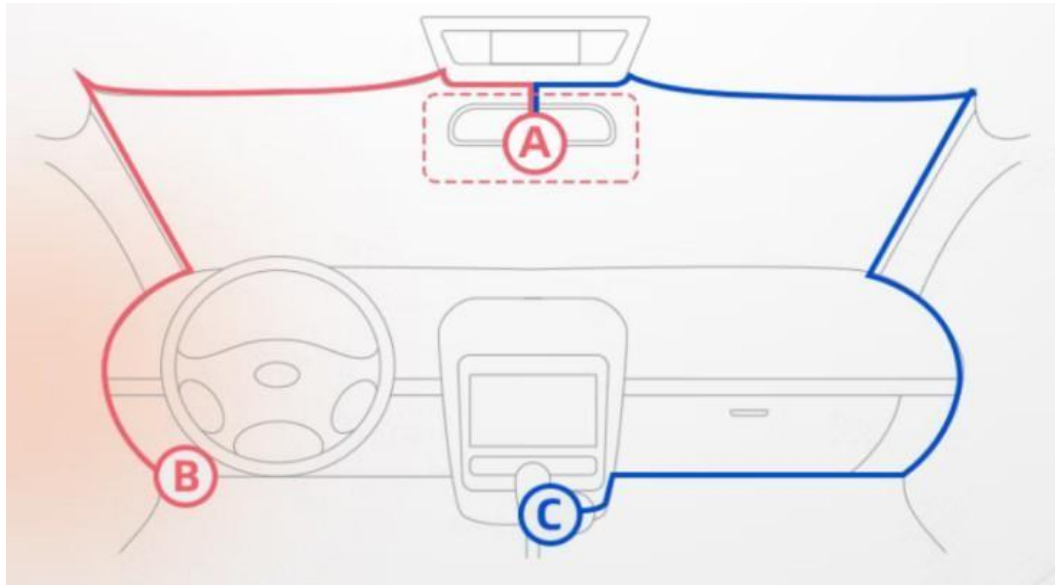

To ensure that the device is fully functional and the alignment is aesthetically pleasing and concealed, the device works stably with a replacement fuse power cable. It is also possible to use a USB power cable to take power from the vehicle power supply (cigarette lighter). In this case, the recorder will only work normally when the vehicle is started, when the vehicle is switched off the recorder will be offline and disconnected, and you will not

What's in the Box



Camera



Power supply



Instruction