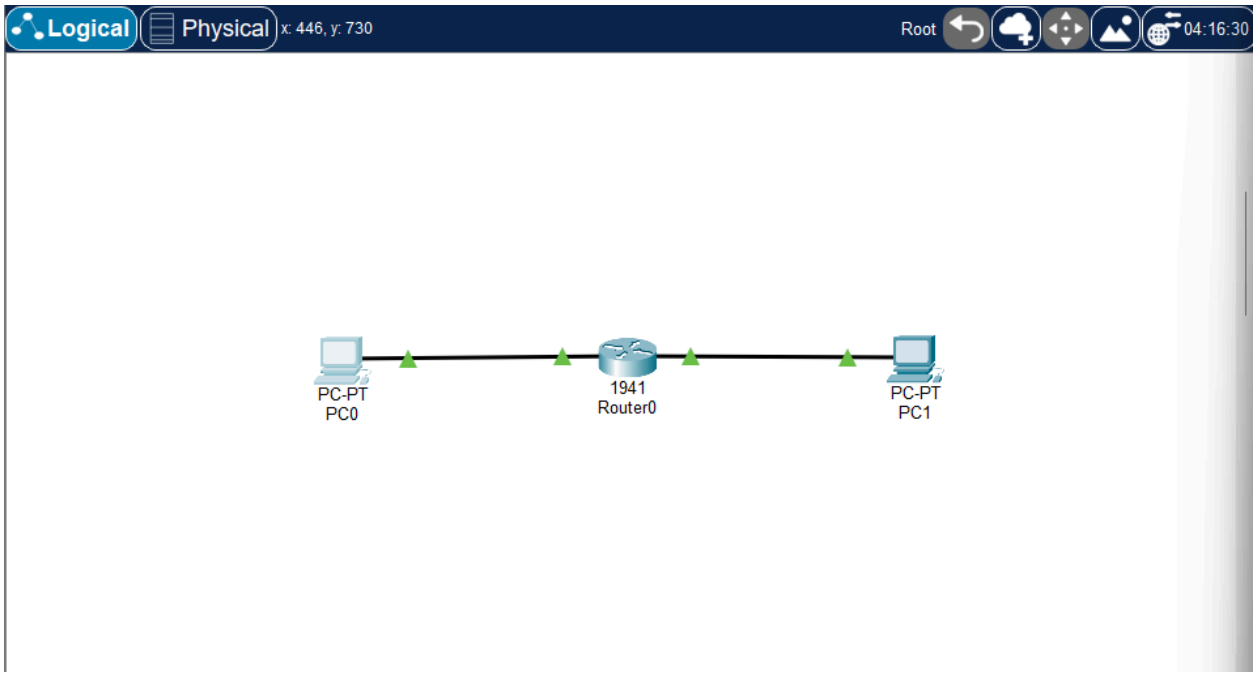
SATHYASEELAN - 241001235

10) a) Design and configure a simple internetwork using a router.



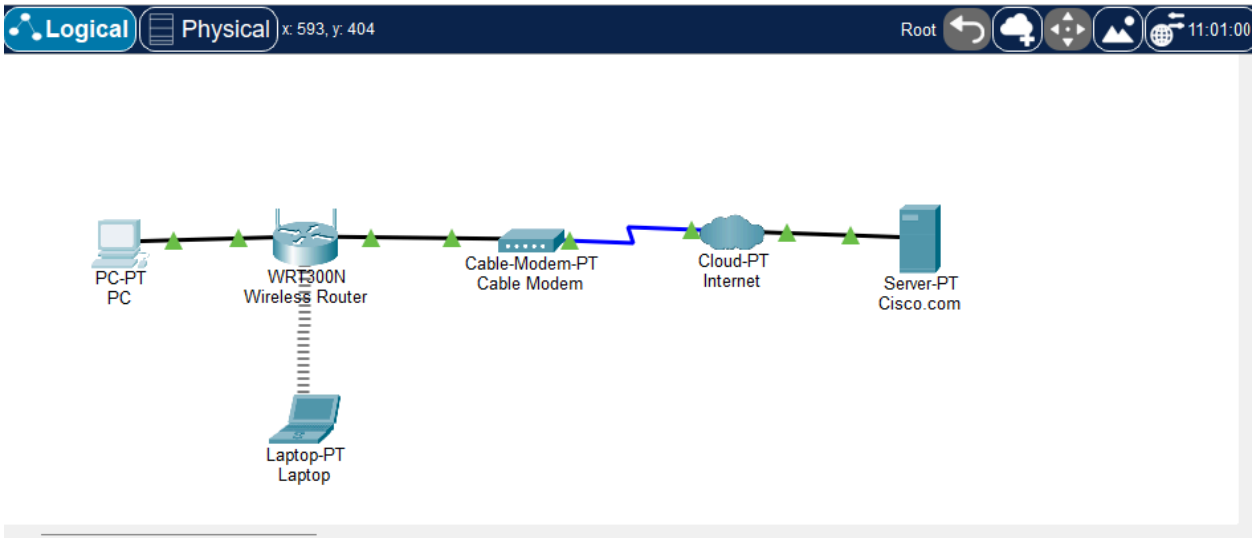

```
C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Reply from 192.168.20.2: bytes=32 time<1ms TTL=127
Reply from 192.168.20.2: bytes=32 time<1ms TTL=127
Reply from 192.168.20.2: bytes=32 time<1ms TTL=127
Reply from 192.168.20.2: bytes=32 time=5ms TTL=127

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 5ms, Average = 1ms
```

10) b) Design and configure an internetwork using wireless router, DHCP server and internet cloud.




```
C:\>ipconfig /release

   IP Address......................: 0.0.0.0
   Subnet Mask.....................: 0.0.0.0
   Default Gateway.................: 0.0.0.0
   DNS Server......................: 0.0.0.0

C:\>ipconfig /renew

   IP Address......................: 192.168.0.101
   Subnet Mask.....................: 255.255.255.0
   Default Gateway.................: 192.168.0.1
   DNS Server......................: 208.67.220.220

C:\>ping Cisco.com

Pinging 208.67.220.220 with 32 bytes of data:

Reply from 208.67.220.220: bytes=32 time=2ms TTL=127
Reply from 208.67.220.220: bytes=32 time=5ms TTL=127
Reply from 208.67.220.220: bytes=32 time=6ms TTL=127
Reply from 208.67.220.220: bytes=32 time=5ms TTL=127

Ping statistics for 208.67.220.220:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 6ms, Average = 4ms

C:\>
```