


EXP - 4 LAN CONFIGURATION

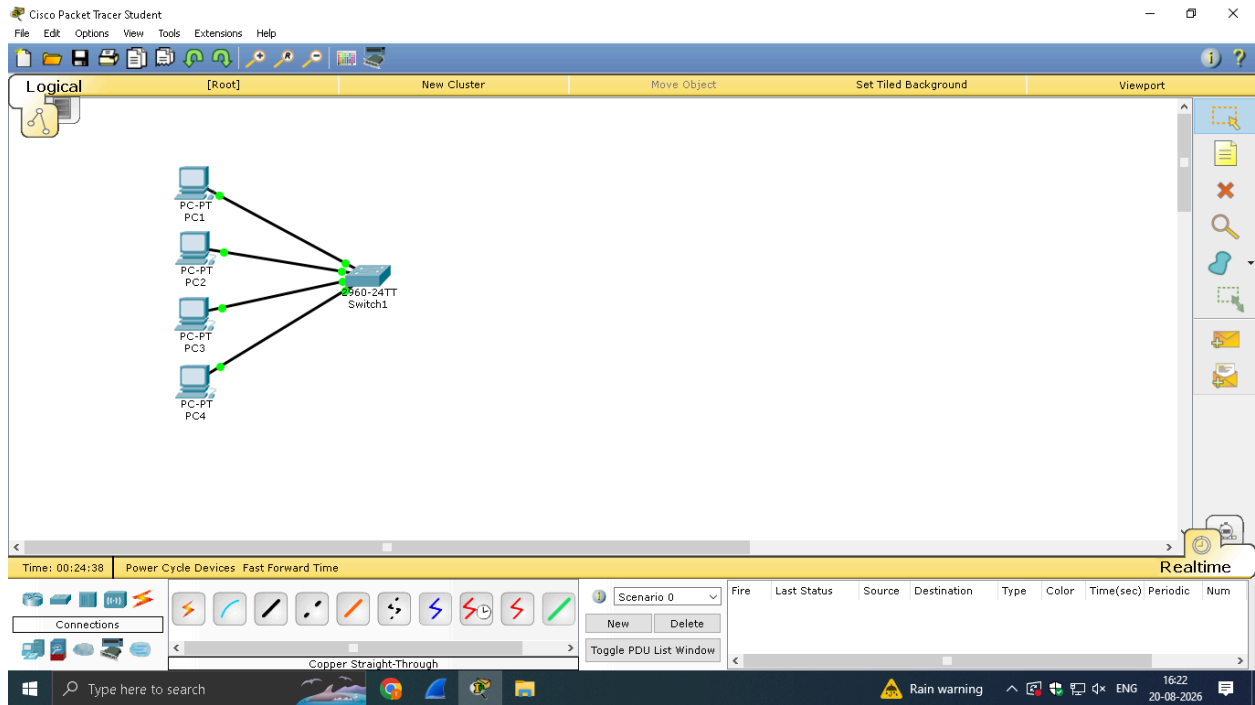

Switch1

Physical

Config

CLI

IOS Command Line Interface

FastEthernet0/17	unassigned	YES manual	down	down
FastEthernet0/18	unassigned	YES manual	down	down
FastEthernet0/19	unassigned	YES manual	down	down
FastEthernet0/20	unassigned	YES manual	down	down
FastEthernet0/21	unassigned	YES manual	down	down
FastEthernet0/22	unassigned	YES manual	down	down
FastEthernet0/23	unassigned	YES manual	down	down
FastEthernet0/24	unassigned	YES manual	down	down
GigabitEthernet0/1	unassigned	YES manual	down	down
GigabitEthernet0/2	unassigned	YES manual	down	down
Vlan1	10.1.1.5	YES manual	up	up

Switch#

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to

Copy

Paste

Command Prompt



```
PC>ping 10.1.1.4
```

```
Pinging 10.1.1.4 with 32 bytes of data:
```

```
Reply from 10.1.1.4: bytes=32 time=2ms TTL=128
```

```
Reply from 10.1.1.4: bytes=32 time=0ms TTL=128
```

```
Reply from 10.1.1.4: bytes=32 time=0ms TTL=128
```

```
Reply from 10.1.1.4: bytes=32 time=0ms TTL=128
```

```
Ping statistics for 10.1.1.4:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
    Minimum = 0ms, Maximum = 2ms, Average = 0ms
```

```
PC>ping 10.1.1.5
```

```
Pinging 10.1.1.5 with 32 bytes of data:
```

```
Request timed out.
```

```
Reply from 10.1.1.5: bytes=32 time=0ms TTL=255
```

```
Reply from 10.1.1.5: bytes=32 time=0ms TTL=255
```

```
Reply from 10.1.1.5: bytes=32 time=0ms TTL=255
```

```
Ping statistics for 10.1.1.5:
```

```
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
PC>
```