Fiber Optics
Sliding Patchpanel

Features and Benefits

- Fast and easy access to front and read connectors
- Wide range of connector types (SC and LC standard)
- Suitable for pigtail splicing or IFC Breakout cables
- Wide range of cable types can be installed at the rear
- Various anchoring points for incoming cables
- Clear port identification strip on front plate
- Fiber-management kits and splice cassette areoffered as accessories
- All panels are available pre-loaded with adapters,pigtails and splice accessories

Overview

The PPC Fiber Optic 19" Sliding Patch Panel has been designed to facilitate internal fiber management and also to maximize fiber density in 1U, 2U and 4U height increments.
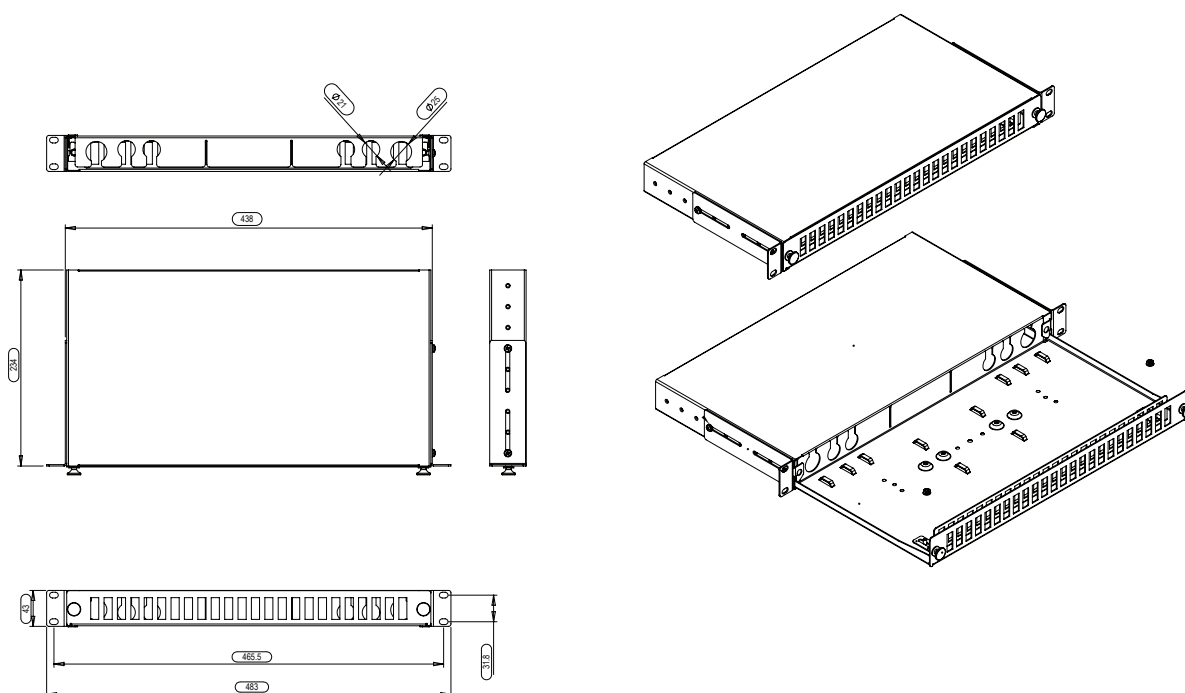
The sliding tray provides easy access to fiber cabling, making this panel ideal for 'Pay as you Grow' applications. The panel supports 24 way, 48 way and 96 way configurations in SC Simplex, SC Duplex, ST/FC (D cut out), LC Duplex (SC simplex foot print), LC Quad (SC Duplex foot print). Versions are available with MTP MPO cut-outs on the back for use with pre-terminated MTP/MPO trunks.

Technical Data

Mechanical Data

Parameter	Measures
Dimensions (W x D x H)	483 x 235.2 x 43
Material	Steel powder-coated
Height variants	1U,2U and 4U

Technical Drawing

Fiber Optics
Sliding Patchpanel

PPC® A BELDEN BRAND

Ordering Information

SLP	B	1	1	U	1	A	A	1	A	1	S	S	
	04	05	06	07	08	09	10	11	12	13	14	15	16

04. Panel Color
B = Black
S = Slate/Grey

05. Panel Size
1 = 1U
2 = 2U
3 = 3U
4 = 4U

06. No of Cutouts
1 = 12 Cutout
2 = 24 Cutout
3 = 48 Cutout
4 = 72 Cutout
5 = 96 Cutout
6 = 144 Cutout
7 = 288 Cutout

07. Configuration
U = Unloaded
A = Loaded with Adaptors
P = Loaded with Adaptors & Pigtails
C = Loaded with Splice tray only
D = Loaded with Adaptor & Splice tray
X = Custom (Details will be mentioned in description)

08. Adaptor/Connector Type
1 = SC Simplex
2 = LC Duplex
3 = FC
4 = ST
A = SC Duplex
B = LC Quad

09. Color
A = AQUA
G = GREEN
U = BLUE
H = HEATHER VIOLET
I = Beige
M = Metal
Empty = Unloaded

10. No. ports to be loaded
A = 6 port
B = 12port
C = 24port
D = 36port
E = 48 port
F = 72port
G = 96 port
H = 144port
I = 288port
Empty = Unloaded

11. Splice tray Capacity
1 = 12F
2 = 24F
Empty = Unloaded

12. No. of Splice tray
A = 1
B = 2
C = 3
D = 4
E = 5
F = 6
G = 7
H = 8
I = 9
J = 10
K = 11
L = 12
Empty = Unloaded

13. Pigtail Fiber Type
1 = OM1
2 = OM2
3 = OM3
4 = OM4
5 = OM5
S = G.652D
A = G.657A1- BIF 10mm
N = G.657A2- BIF 7.5mm
B = G.657B3- BIF 5mm
G = G.655
Empty = Unloaded

14. Pigtail color code
S = Single color
T = TIA color code (12 color)

15. Accessories
S = Standard accessories (FMK kit)
A = Standard accessories with Splice protector

16. Branding
Empty = Standard PPC Brand
X = Custom Branding