



1. Description

1.1. Project

Project Name	thermometer
Board Name	custom
Generated with:	STM32CubeMX 6.2.0
Date	03/10/2021


1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

1.3. Core(s) information

Core(s)	Arm Cortex-M3
---------	---------------

2. Pinout Configuration

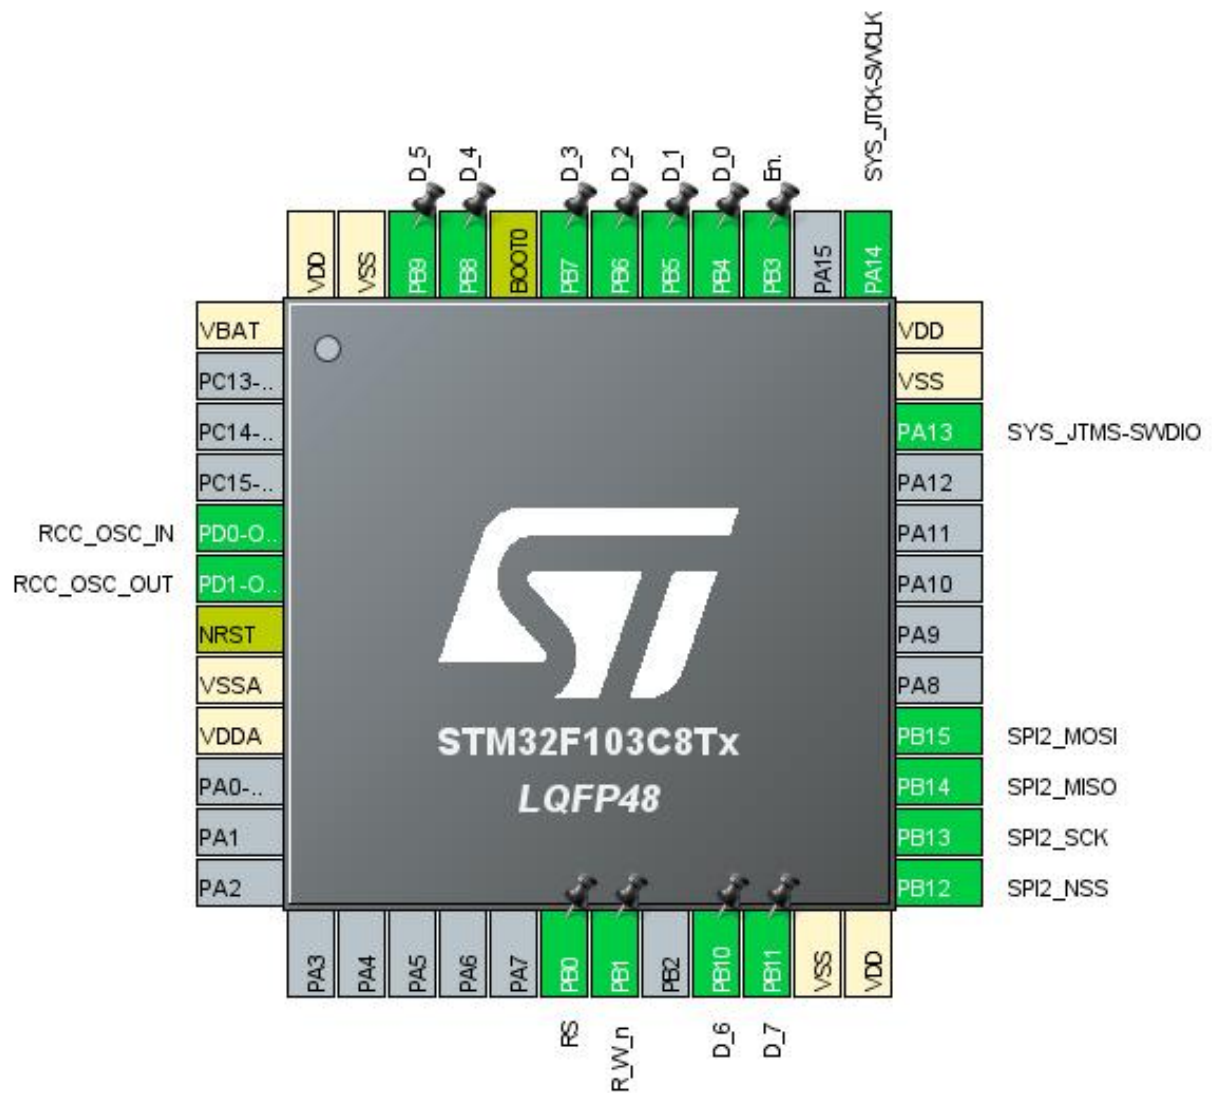


3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
18	PB0 *	I/O	GPIO_Output	RS
19	PB1 *	I/O	GPIO_Output	R_W_n
21	PB10 *	I/O	GPIO_Output	D_6
22	PB11 *	I/O	GPIO_Output	D_7
23	VSS	Power		
24	VDD	Power		
25	PB12	I/O	SPI2_NSS	
26	PB13	I/O	SPI2_SCK	
27	PB14	I/O	SPI2_MISO	
28	PB15	I/O	SPI2_MOSI	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
39	PB3 *	I/O	GPIO_Output	En.
40	PB4 *	I/O	GPIO_Output	D_0
41	PB5 *	I/O	GPIO_Output	D_1
42	PB6 *	I/O	GPIO_Output	D_2
43	PB7 *	I/O	GPIO_Output	D_3
44	BOOT0	Boot		
45	PB8 *	I/O	GPIO_Output	D_4
46	PB9 *	I/O	GPIO_Output	D_5
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

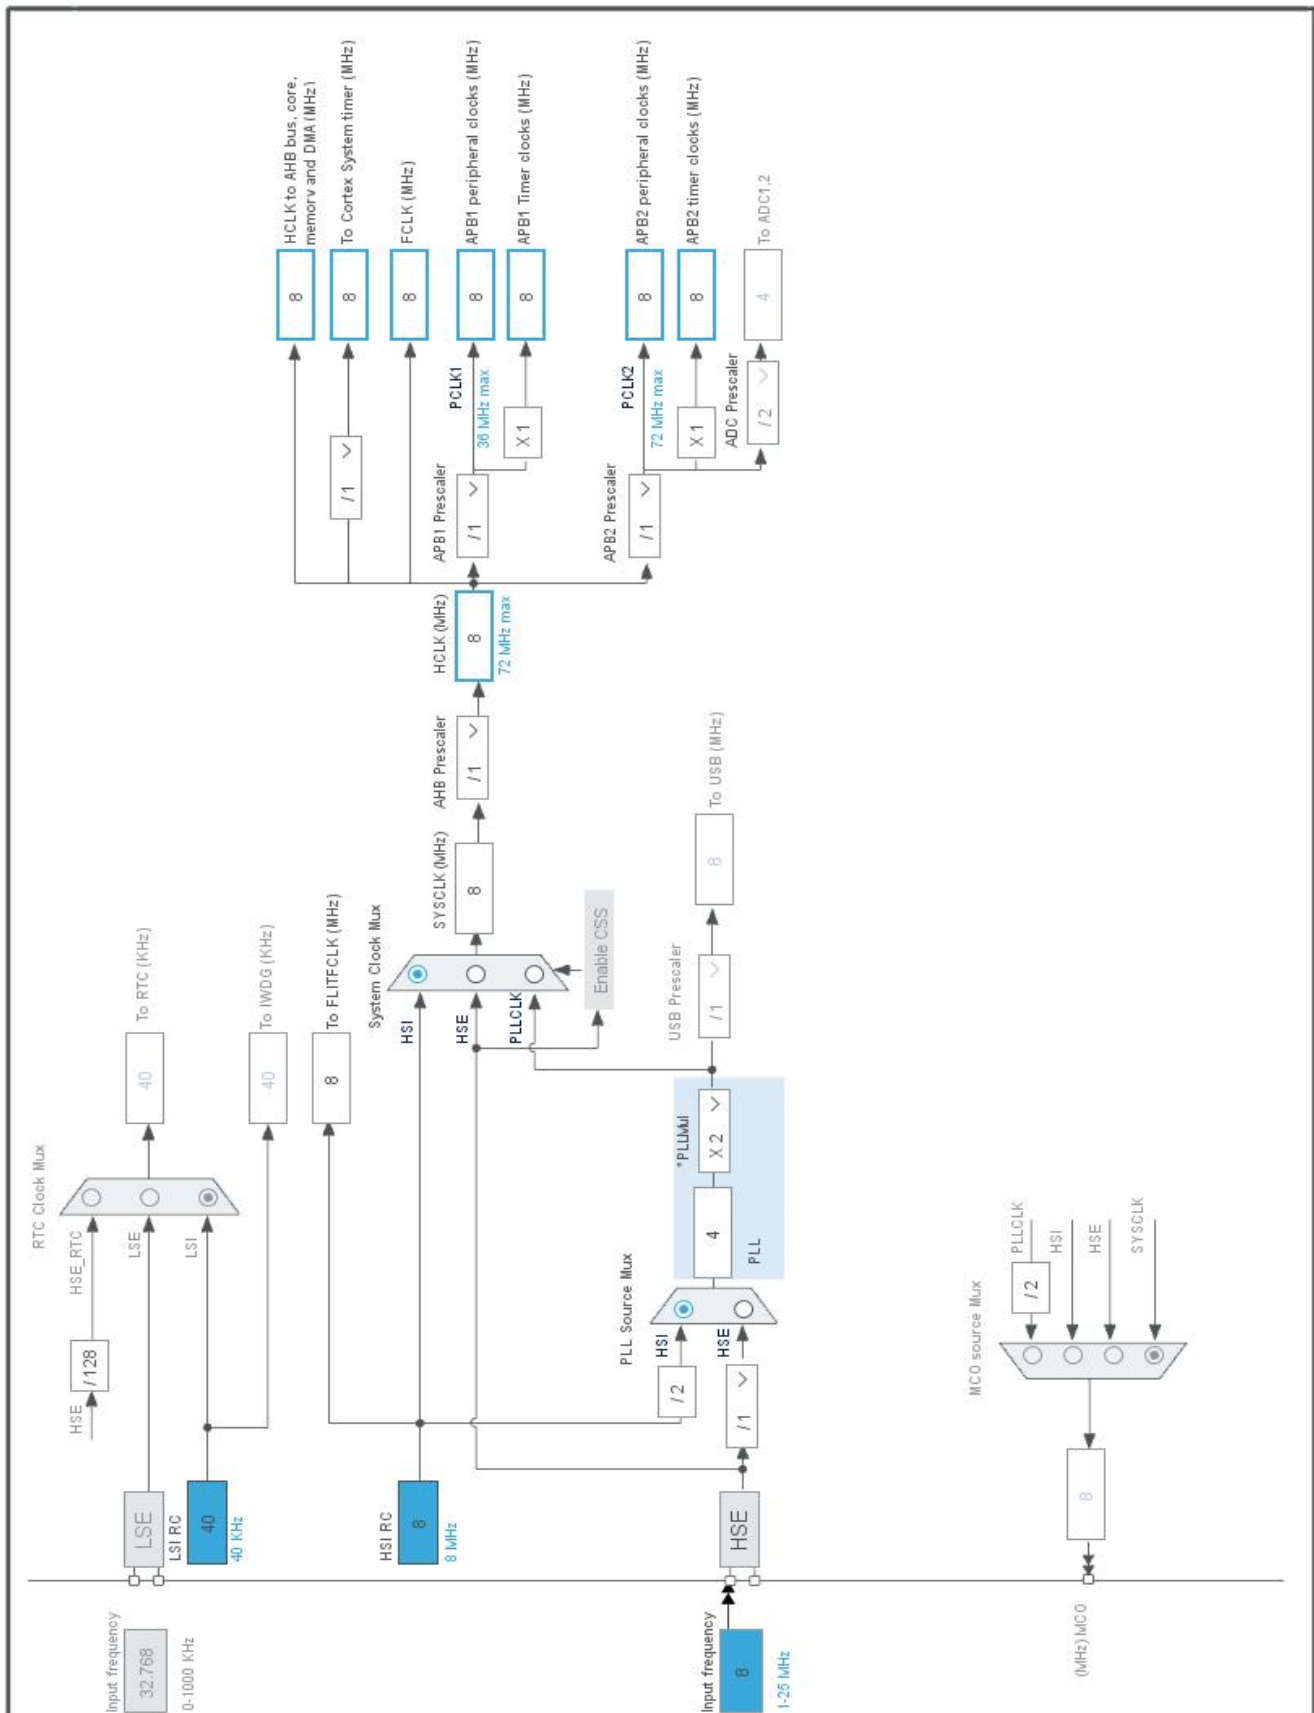

5. Software Project

5.1. Project Settings

Name	Value
Project Name	thermometer
Project Folder	C:\stm_work09.03.21\thermometer
Toolchain / IDE	MDK-ARM V5.27
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.3
Application Structure	Advanced
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	Yes
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	MX_GPIO_Init	GPIO
2	SystemClock_Config	RCC
3	MX_SPI2_Init	SPI2

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	DS5319_Rev17

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	No Scale	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	72 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	27 mA	14 μ A
Duration	0.1 ms	0.9 ms
DMIPS	90.0	0.0
Ta Max	100.1	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	2.71 mA
Battery Life	1 month, 21 days, 17 hours	Average DMIPS	61.0 DMIPS

6.6. Chart

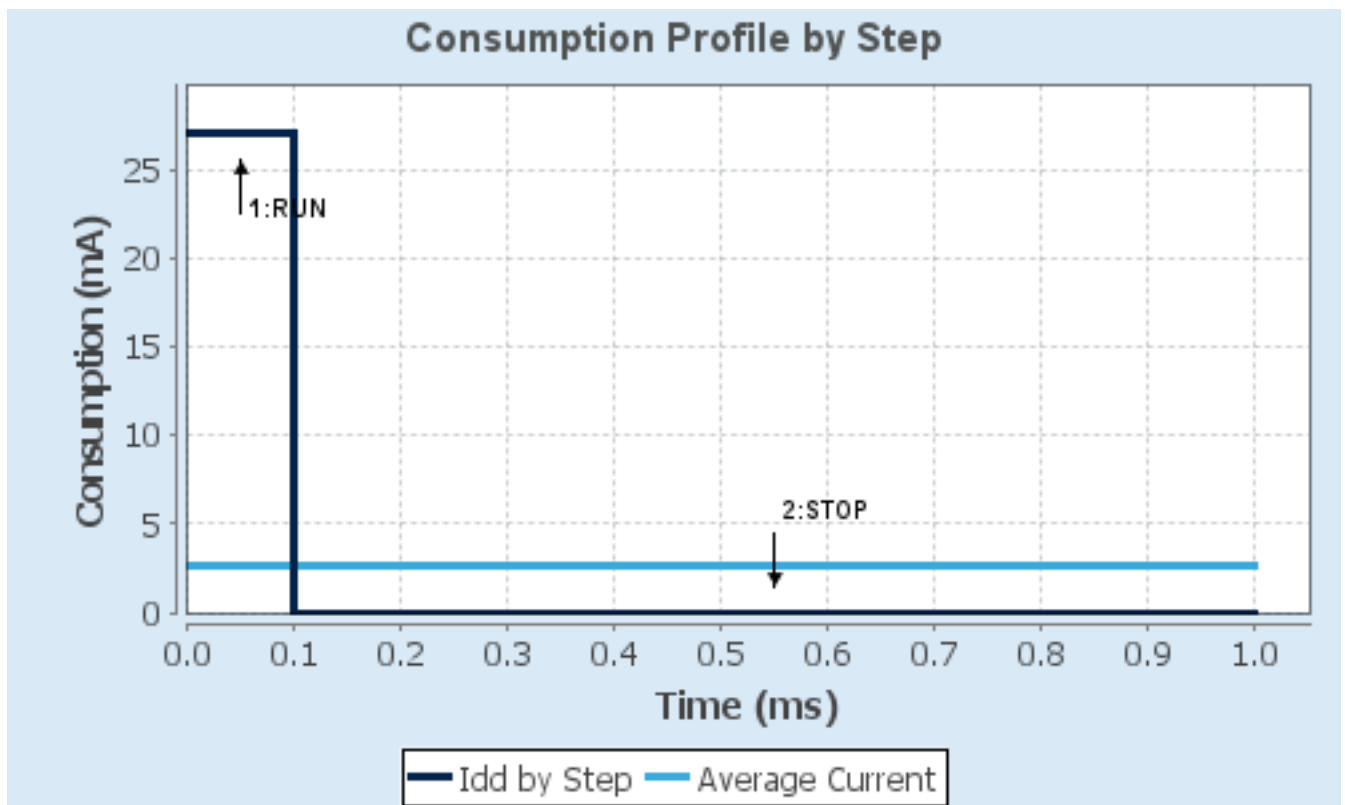

7. Peripherals and Middlewares Configuration

7.1. RCC

High Speed Clock (HSE): BYPASS Clock Source

7.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

7.2. SPI2

Mode: Full-Duplex Master

Hardware NSS Signal: Hardware NSS Output Signal

7.2.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	4.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Output Hardware

7.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI2	PB12	SPI2_NSS	Alternate Function Push Pull	n/a	High *	
	PB13	SPI2_SCK	Alternate Function Push Pull	n/a	High *	
	PB14	SPI2_MISO	Input mode	No pull-up and no pull-down	n/a	
	PB15	SPI2_MOSI	Alternate Function Push Pull	n/a	High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
GPIO	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RS
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	R_W_n
	PB10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	D_6
	PB11	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	D_7
	PB3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	En.
	PB4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	D_0
	PB5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	D_1
	PB6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	D_2
	PB7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	D_3
	PB8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	D_4
	PB9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	D_5

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
SPI2 global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true

* User modified value

9. System Views

9.1. Category view

9.1.1. Current

Middleware				
System Core	Analog	Timers	Connectivity	Computing
DMA			SPI2	
GPIO				
IVIC				
RCC				
SYS				

10. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/CD00161566.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/CD00171190.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/CD00228163.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/CD00283419.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/CD00190234.pdf
Application note	http://www.st.com/resource/en/application_note/CD00160362.pdf
Application note	http://www.st.com/resource/en/application_note/CD00164185.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167326.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167594.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00249778.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264321.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00024853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00032987.pdf
Application note	http://www.st.com/resource/en/application_note/DM00033267.pdf
Application note	http://www.st.com/resource/en/application_note/DM00033344.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00052530.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00129215.pdf

Application note http://www.st.com/resource/en/application_note/DM00160482.pdf
Application note http://www.st.com/resource/en/application_note/DM00156964.pdf
Application note http://www.st.com/resource/en/application_note/DM00209695.pdf
Application note http://www.st.com/resource/en/application_note/DM00220769.pdf
Application note http://www.st.com/resource/en/application_note/DM00257177.pdf
Application note http://www.st.com/resource/en/application_note/DM00272912.pdf
Application note http://www.st.com/resource/en/application_note/DM00236305.pdf
Application note http://www.st.com/resource/en/application_note/DM00296349.pdf
Application note http://www.st.com/resource/en/application_note/DM00325582.pdf
Application note http://www.st.com/resource/en/application_note/DM00327191.pdf
Application note http://www.st.com/resource/en/application_note/DM00354244.pdf
Application note http://www.st.com/resource/en/application_note/DM00315319.pdf
Application note http://www.st.com/resource/en/application_note/DM00380469.pdf
Application note http://www.st.com/resource/en/application_note/DM00395696.pdf
Application note http://www.st.com/resource/en/application_note/DM00493651.pdf
Application note http://www.st.com/resource/en/application_note/DM00536349.pdf
Application note http://www.st.com/resource/en/application_note/DM00725181.pdf