


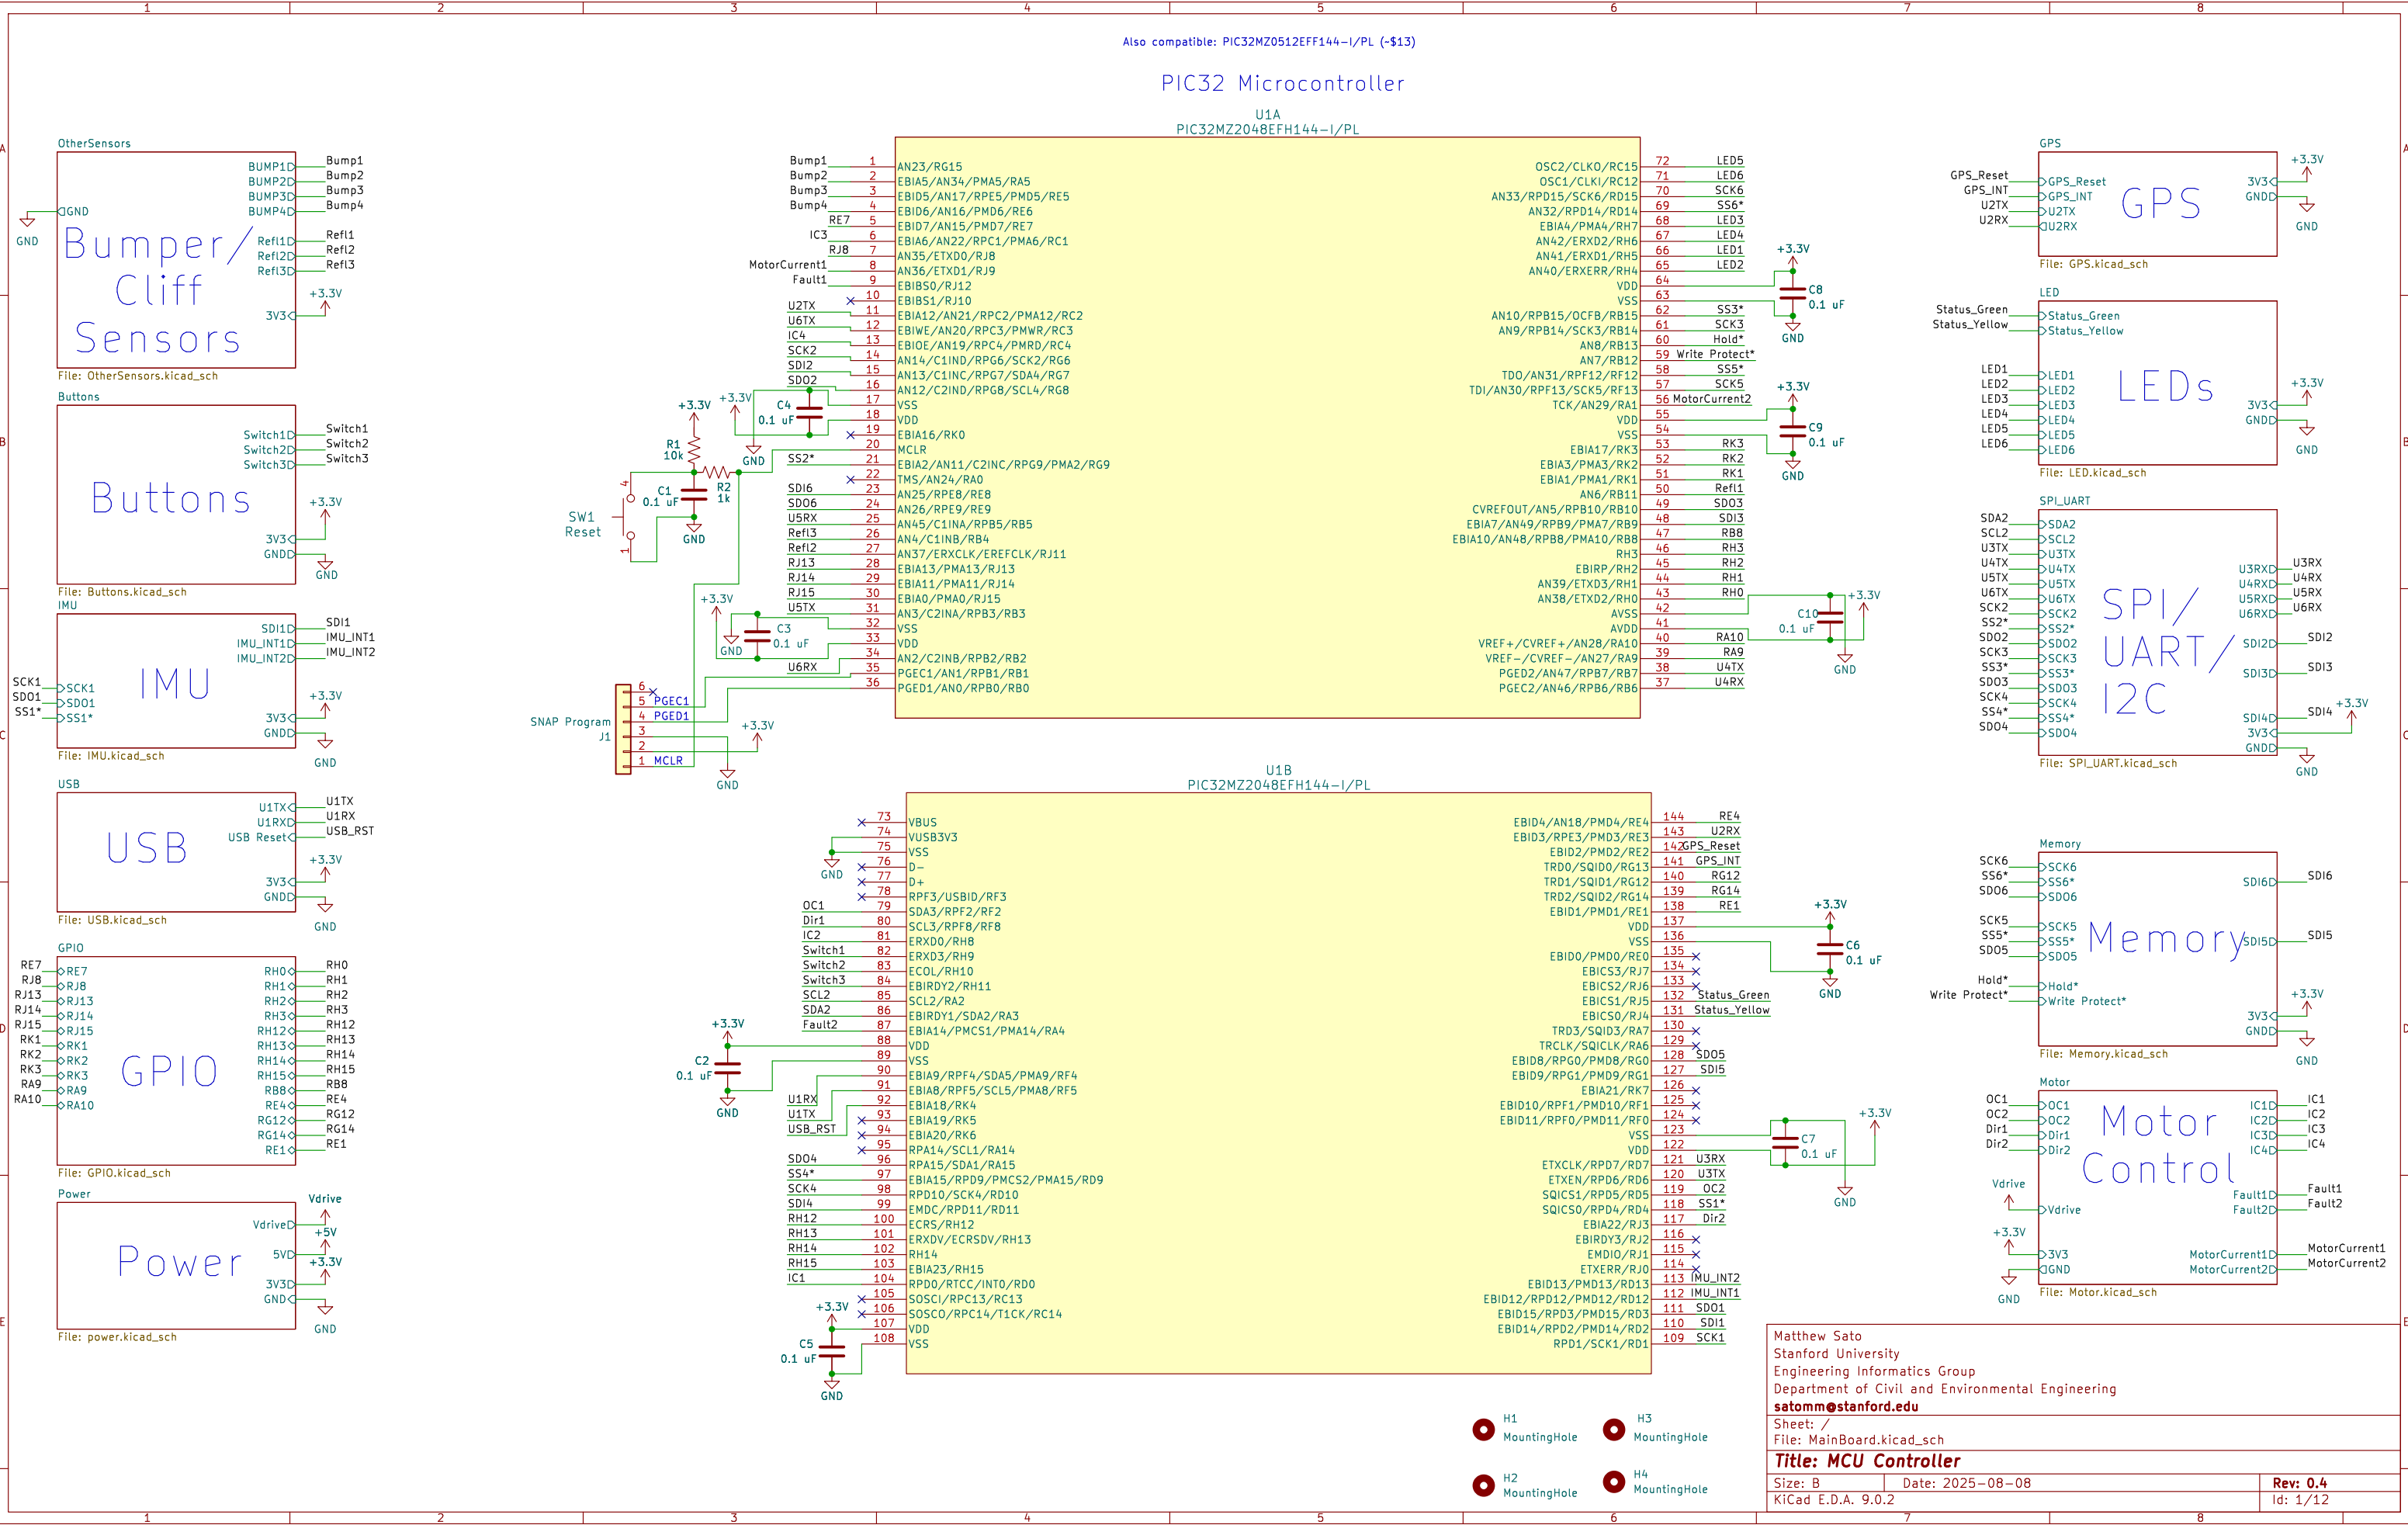

Also compatible: PIC32MZ0512EFF144-I/PL (~\$13)

PIC32 Microcontroller

U1A
PIC32MZ2048EFH144-I/PL


U1B
PIC32MZ2048EFH144-I/PL

Matthew Sato
Stanford University
Engineering Informatics Group
Department of Civil and Environmental Engineering
satomm@stanford.edu


Sheet: /
File: MainBoard.kicad_sch

Title: **MCU Controller**


Size: B	Date: 2025-08-08	Rev: 0.4
KiCad E.D.A. 9.0.2		Id: 1/12




Provide SPI Pins for Connecting to IMU

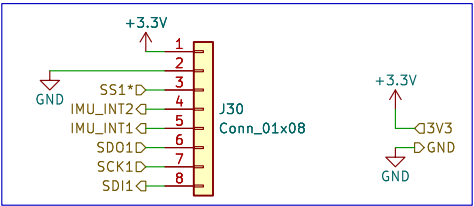


Groups pins together for SPI/UART/I2C for Jetson communication and for future use.

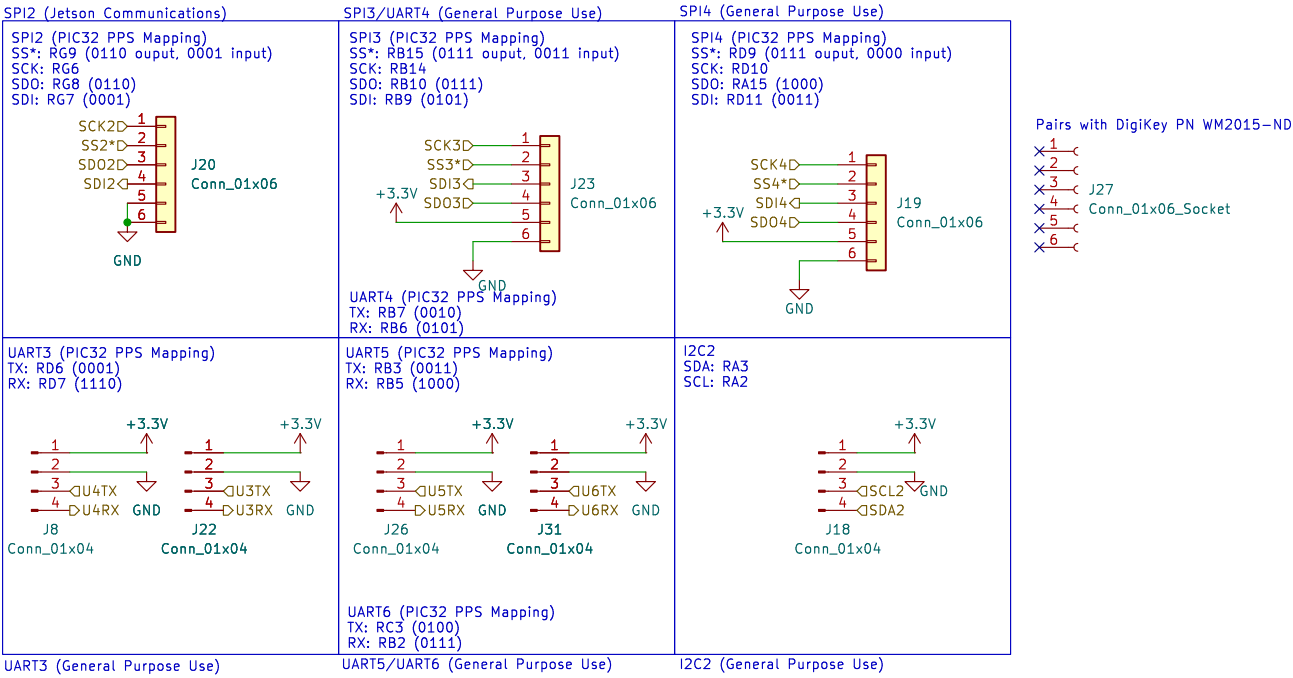

General Purpose LEDs

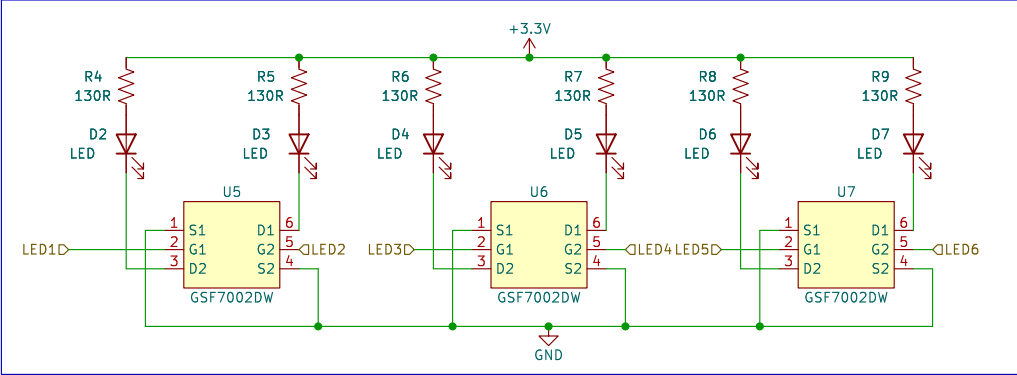




Robot Active/Inactive LED

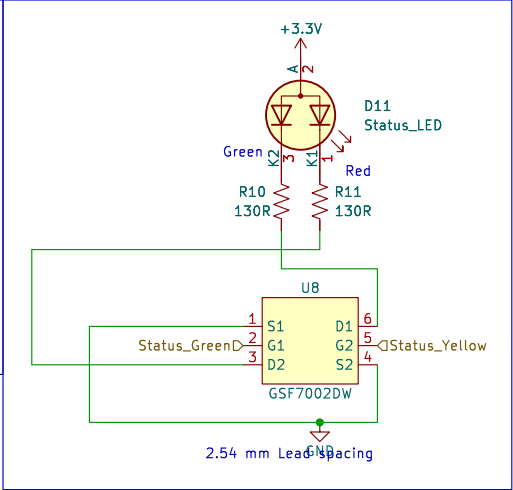

Corresponding Male : DigiKey PN WM4201-ND
Corresponding Female: DigiKey PN 900-0022013037-ND
Corresponding Crimp : DigiKey PN WM2756CT-ND




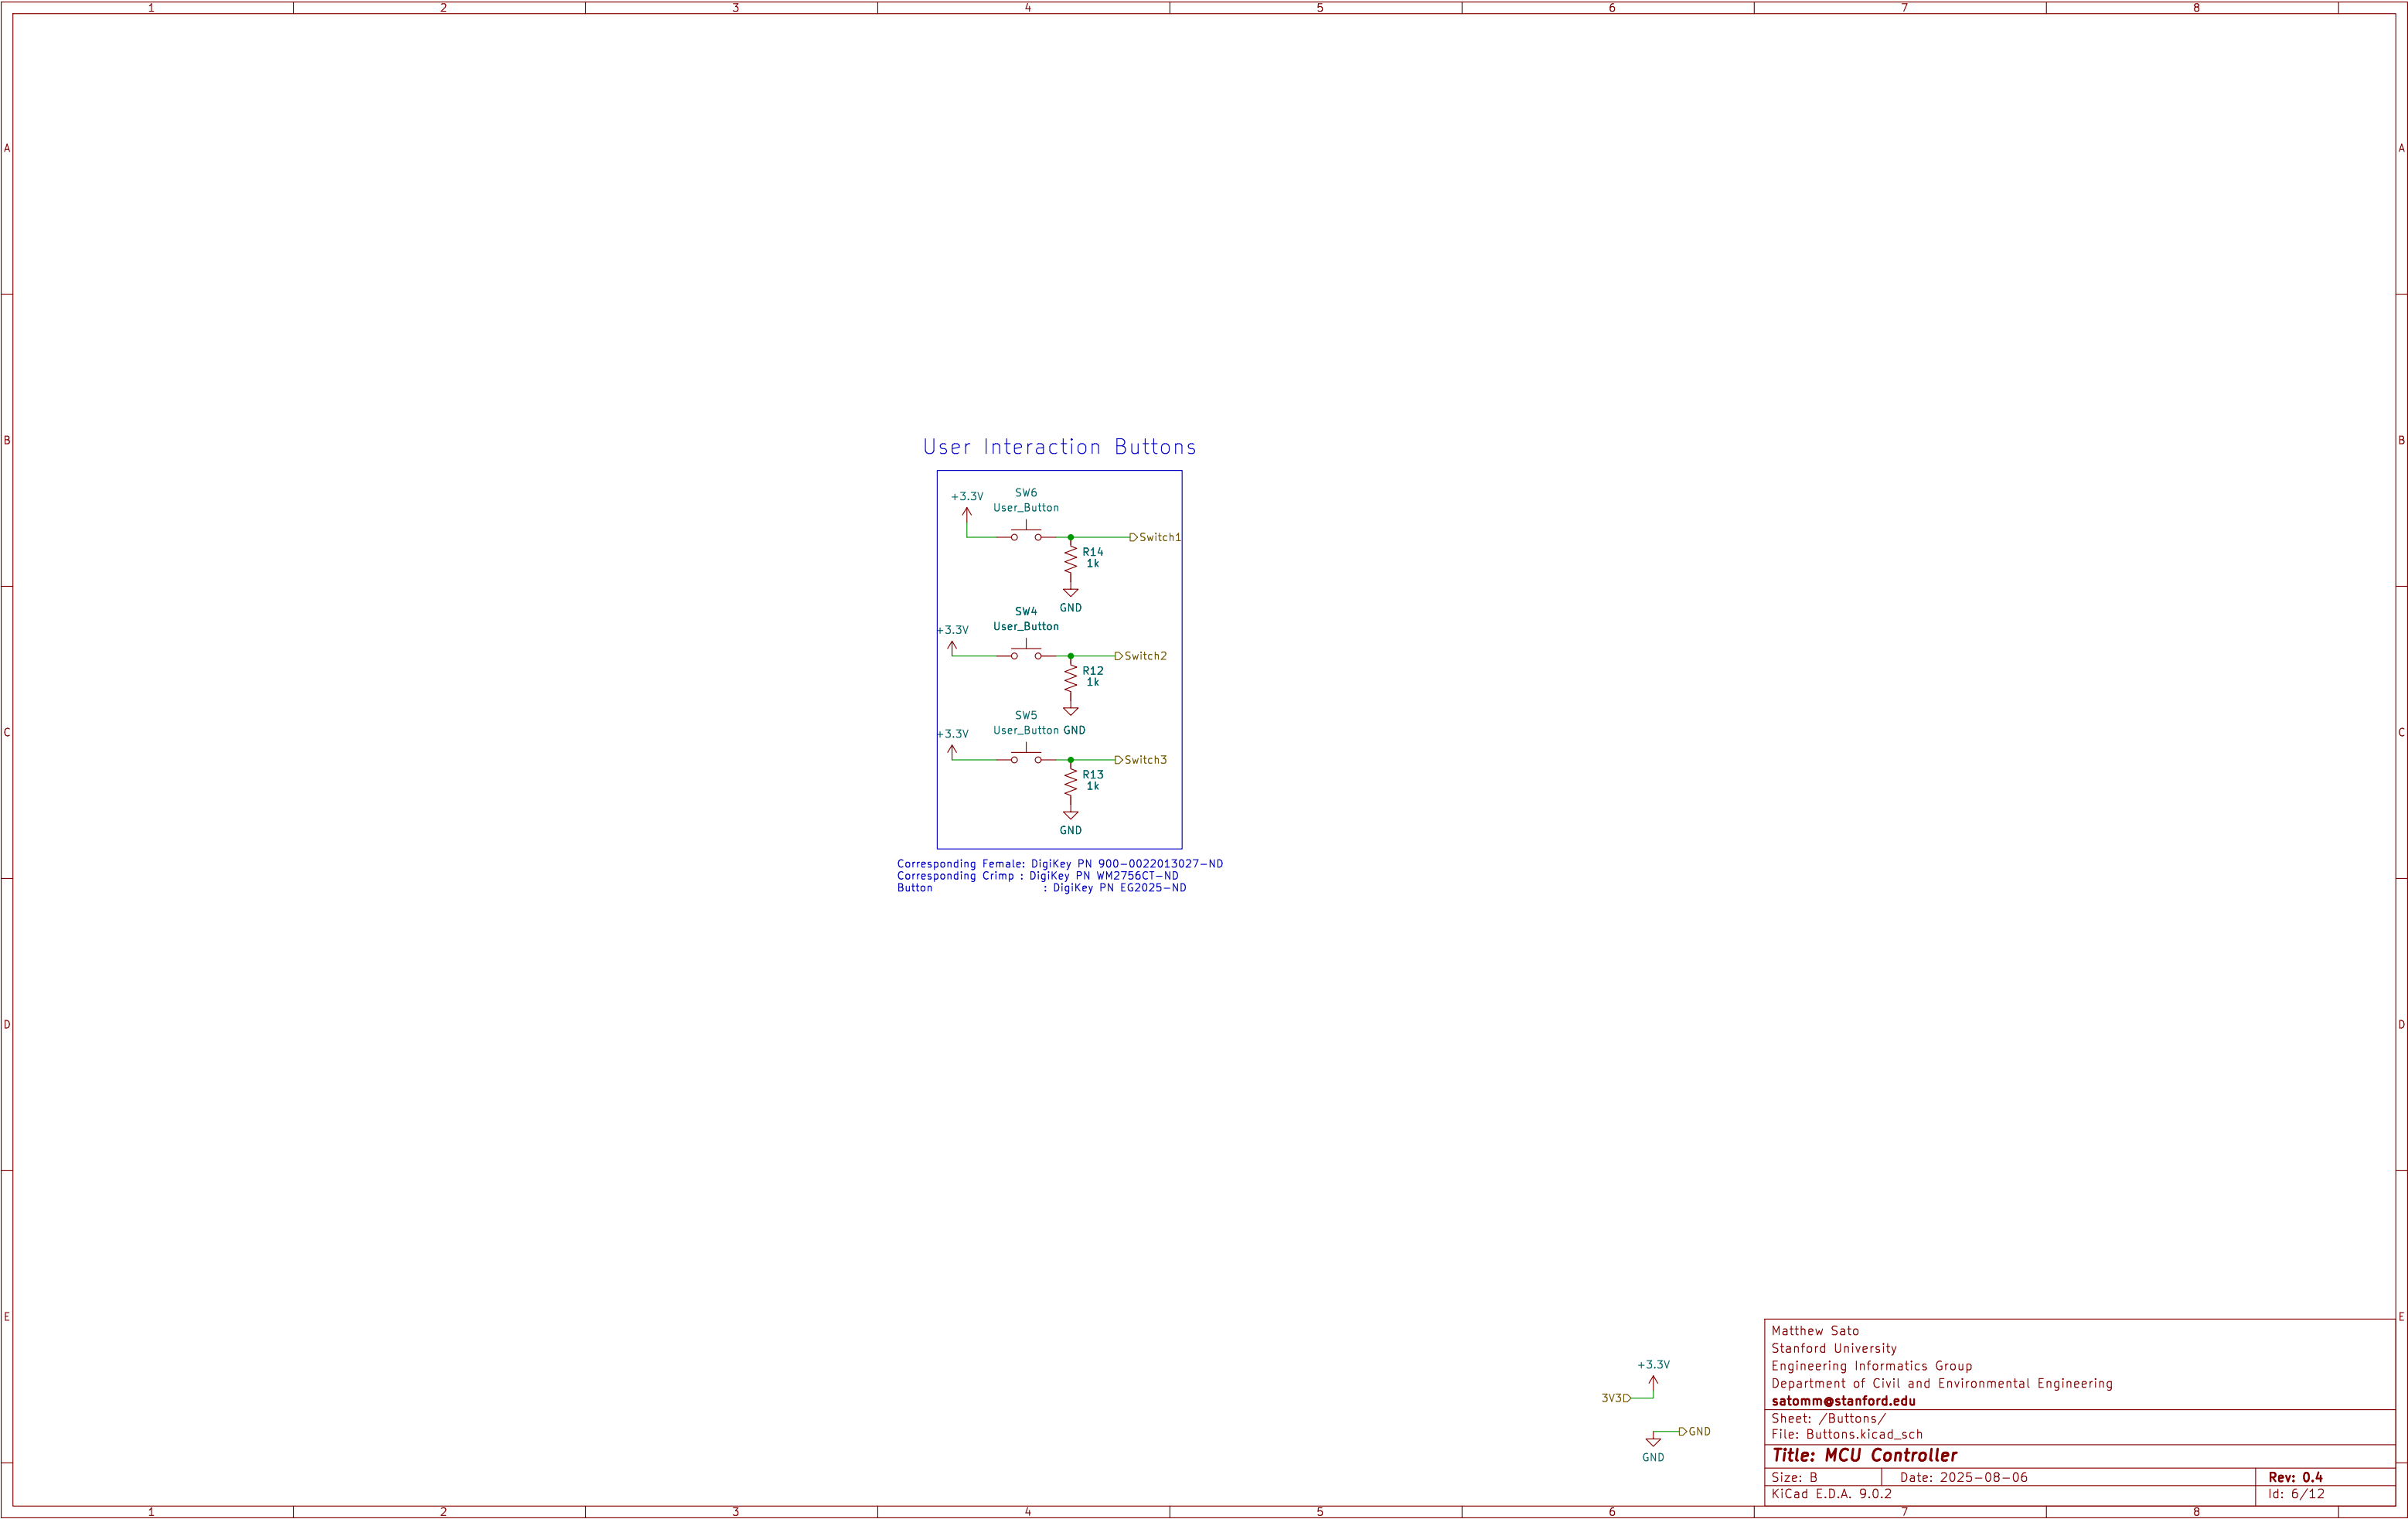

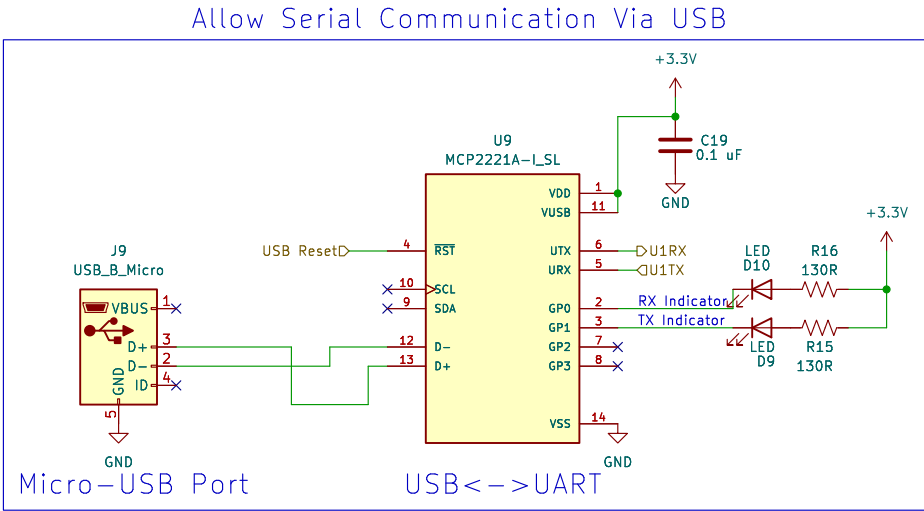


Matthew Sato Stanford University Engineering Informatics Group Department of Civil and Environmental Engineering satomm@stanford.edu		
Sheet: /USB/ File: USB.kicad_sch		
Title: MCU Controller		
Size: B	Date: 2025-08-06	Rev: 0.4
KiCad E.D.A. 9.0.2		Id: 7/12

Left Motor Driver

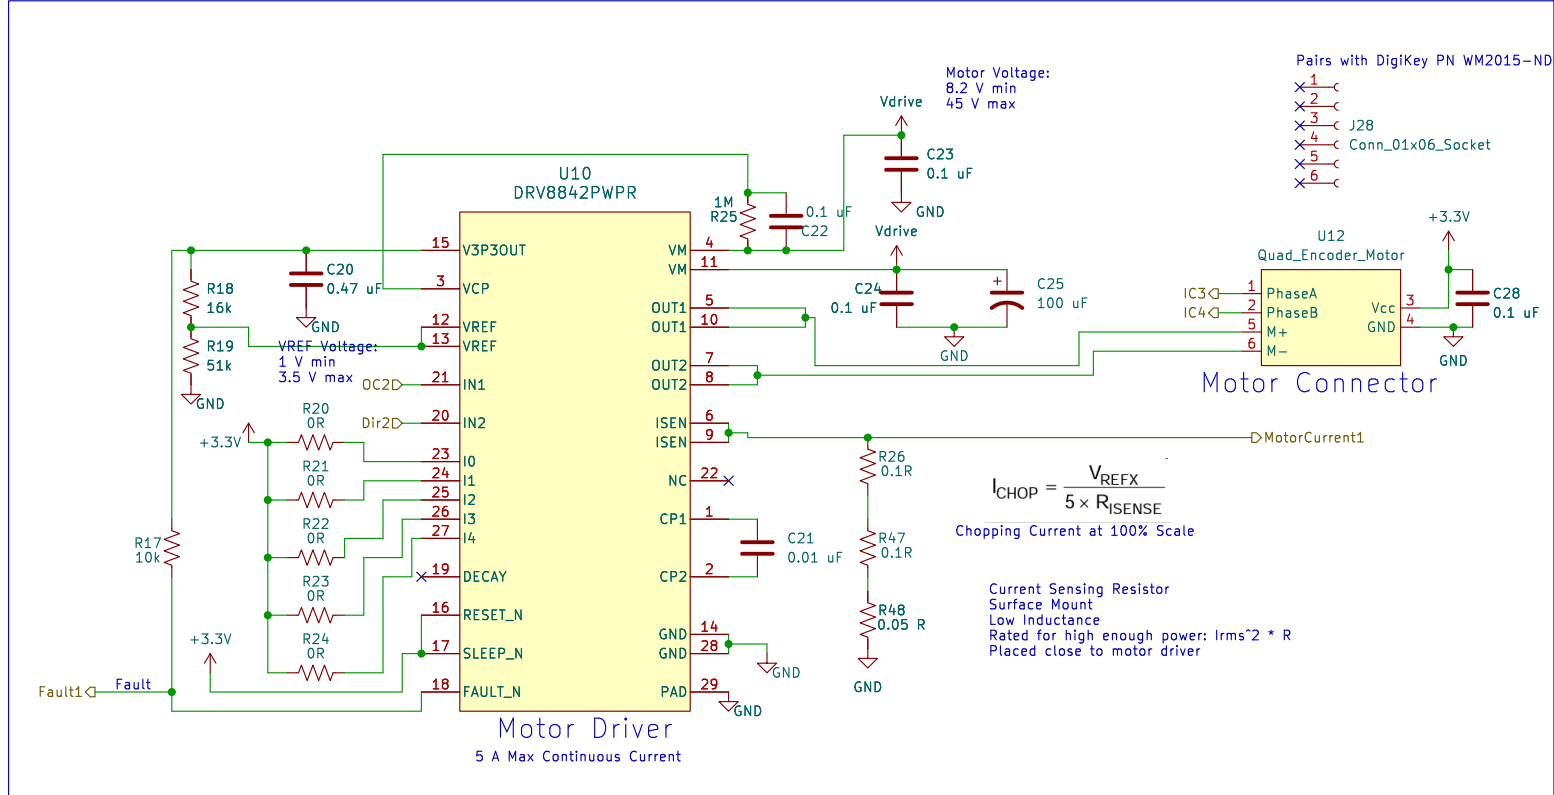

Right Motor Driver

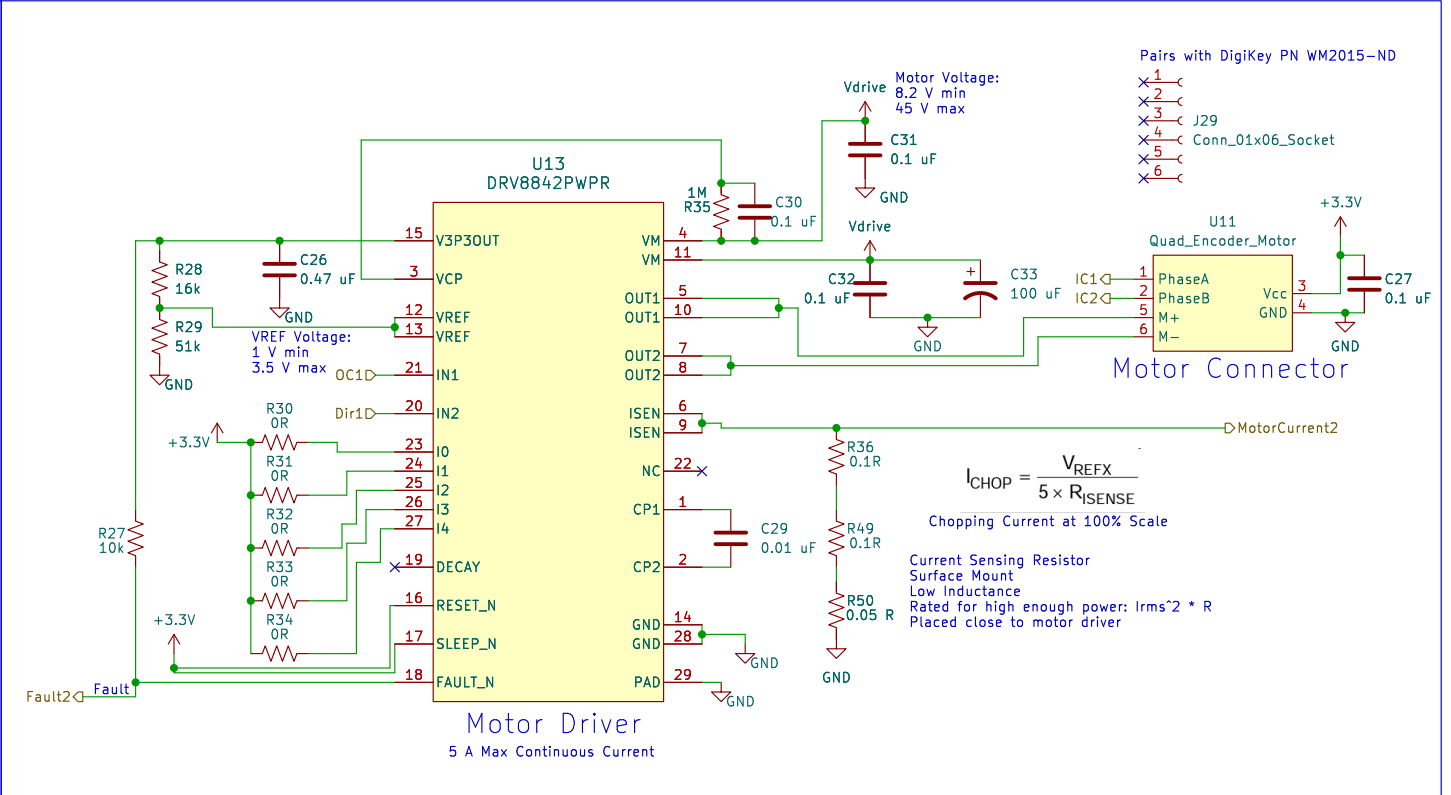

Corresponding Molex for Motor Connector:
Corresponding Female: DigiKey PN WM2002-ND
Corresponding Crimp : DigiKey PN WM2756CT-ND


xIN1	xIN2	xOUT1	xOUT2
0	0	L	L
0	1	L	H
1	0	H	L
1	1	H	H

PWM Frequency:
100 kHz max

Slow Decay: Logic low
Mixed Decay: Open
Fast Decay: Logic high

10 – 14 Function

[4-0]	RELATIVE CURRENT (% FULL-SCALE CHOPPING CURRENT)
0x00h	0%
0x01h	5%
0x02h	10%
0x03h	15%
0x04h	20%
0x05h	24%
0x06h	29%
0x07h	34%
0x08h	38%
0x09h	43%
0x0Ah	47%
0x0Bh	51%
0x0Ch	56%
0x0Dh	60%
0x0Eh	63%
0x0Fh	67%
0x10h	71%
0x11h	74%
0x12h	77%
0x13h	80%
0x14h	83%
0x15h	86%
0x16h	88%
0x17h	90%
0x18h	92%
0x19h	94%
0x1Ah	96%
0x1Bh	97%
0x1Ch	98%
0x1Dh	99%
0x1Eh	100%
0x1Fh	100%




Matthew Sato
Stanford University
Engineering Informatics Group
Department of Civil and Environmental Engineering
satomm@stanford.edu
Sheet: /Motor/
File: Motor.kicad_sch

Topic: MCU Controller


Size: B	Date: 2025-08-06
KiCad E.D.A. 9.0.2	

Bumper Sensors

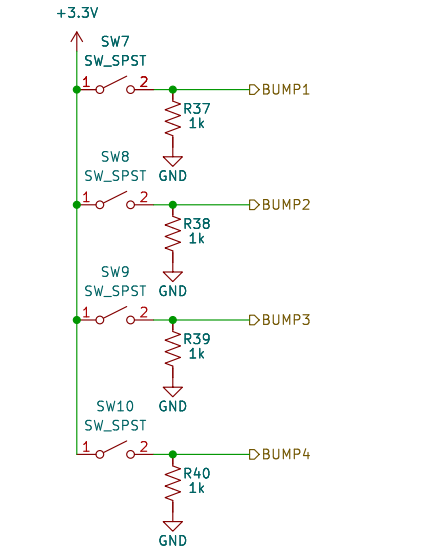


Corresponding Female: DigiKey PN 900-0022013027-ND
Corresponding Crimp : DigiKey PN WM2756CT-ND
Limit Switch : DigiKey PN _____

Reflective Optical Sensors
(Cliff Sensor)

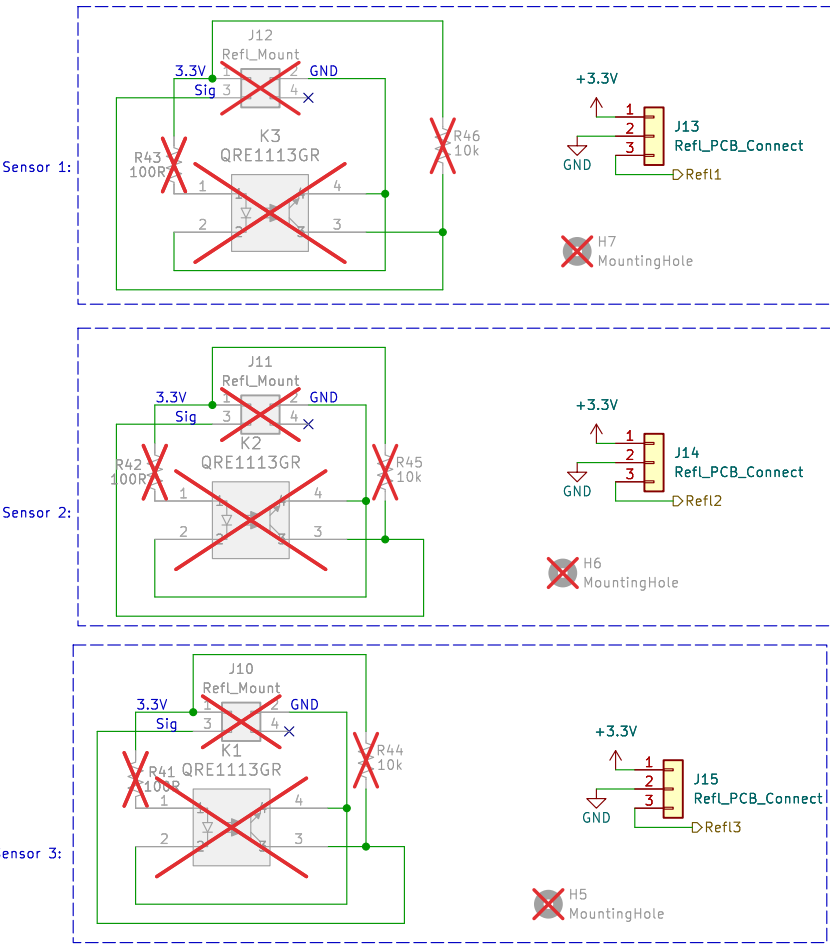


Corresponding Female: DigiKey PN 900-0022013037-ND
Corresponding Crimp : DigiKey PN WM2756CT-ND




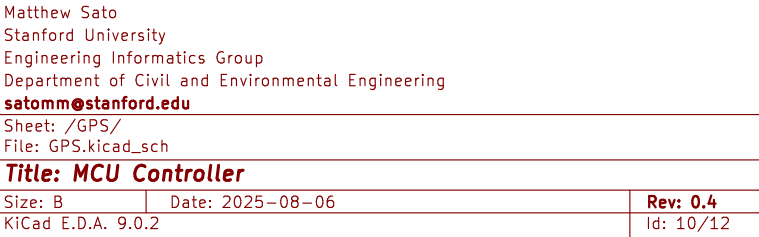


Provide Access to Unused Pins

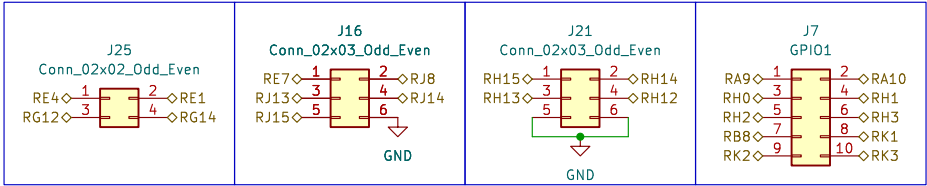


3.3V Converter for ICs

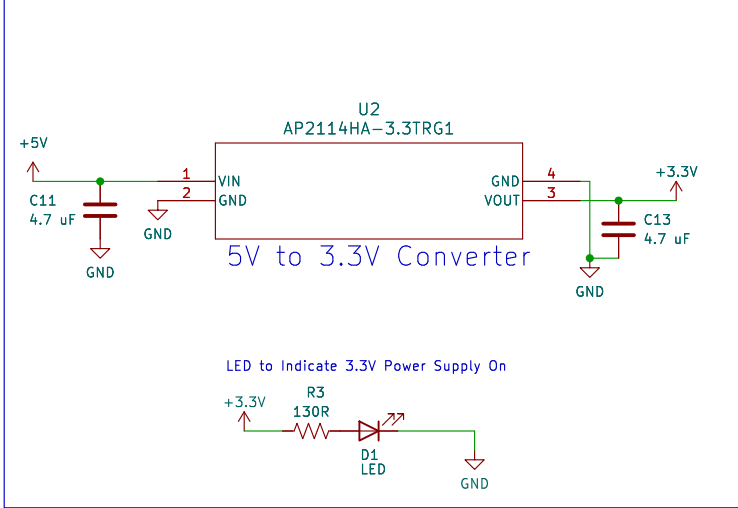


Auxilliary Power Pins

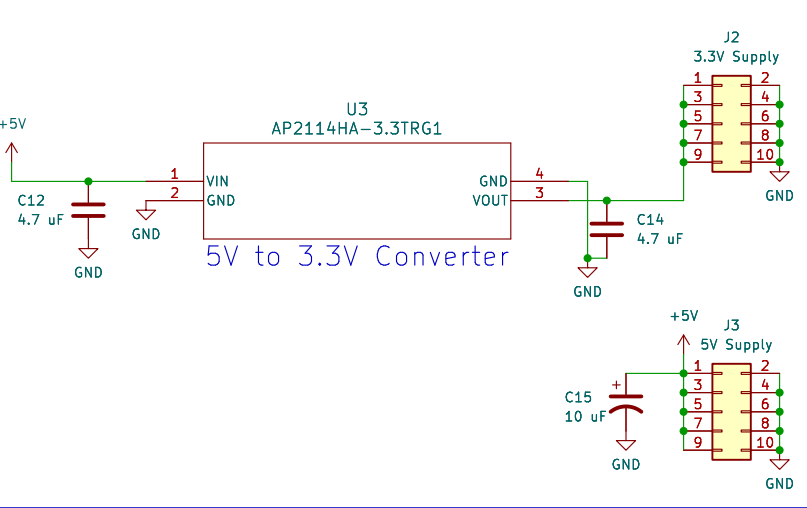

Power Switches

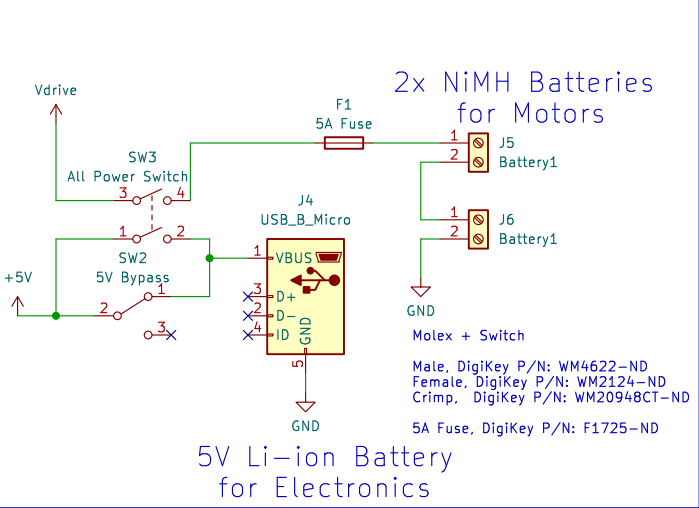


Inputs:
1) Motor Battery: 2x NiMH Battery, 7.2 V Each
2) Battery for MCU: 5 V

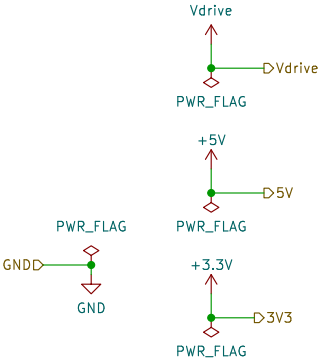


Matthew Sato Stanford University Engineering Informatics Group Department of Civil and Environmental Engineering satomm@stanford.edu		
Sheet: /Power/ File: power.kicad_sch		
Title: MCU Controller		
Size: B	Date: 2025-08-06	Rev: 0.4
KiCad E.D.A. 9.0.2	Id: 12/12	

MicroSD Card

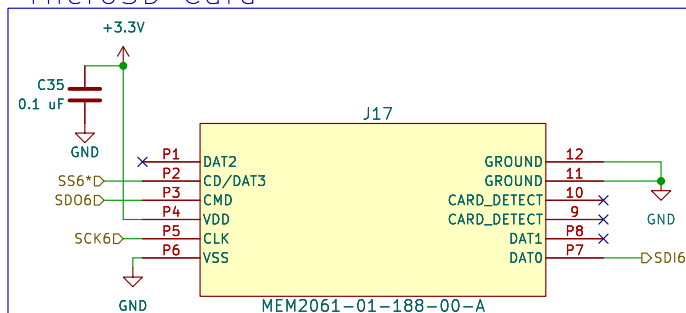

EEPROM

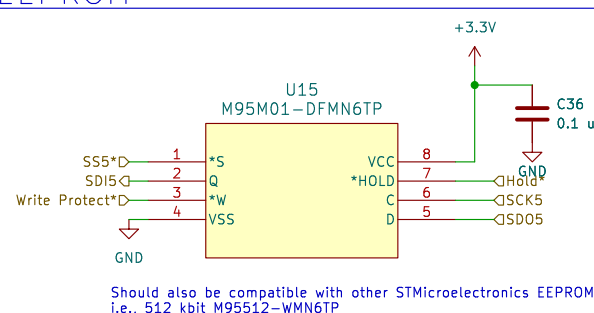

Matthew Sato Stanford University Engineering Informatics Group Department of Civil and Environmental Engineering satomm@stanford.edu		
Sheet: /Memory/ File: Memory.kicad_sch		
Title: MCU Controller		
Size: A4	Date: 2025-08-06	Rev: 0.4
KiCad E.D.A. 9.0.2	Id: 12/12	