



Jiangsu Satong Intelligent Logistics Equipment Co., Ltd

Jiangsu Satong Intelligent Logistics equipment Co., Ltd. (hereinafter referred to as "Satong") is an automatic three-dimensional warehouse, all kinds of conventional storage shelves, metal work station appliances, plastic pallets and material boxes and other products of the design, manufacture, sales, installation and commissioning of professional comprehensive services company. Satong has 12 senior mechanical engineers and electrification engineers, and more than 20 core technology patents.

Satong tried to improve the technical and management level, in mechanical computing, structural design, finite element analysis, equipment upgrading and other aspects, fully mastered the preliminary design and manufacturing technology of automation.

Scientific and technological innovation has always been an important direction of Satong's development: on the basis of optimizing the design of traditional shelves, the company focuses on promoting the design and development of automated warehouse storage system. And intelligent sub-bus and shuttle-type dense storage system as the representative of new storage research and development and promotion. Satong will continue to focus on the optimization and innovation of dense storage systems. In the future, Satong will focus more on technological innovation in automated logistics equipment, comprehensively improve and optimize the technology and quality of products. Strive to become a rapid development of intelligent warehousing industry high-tech enterprises.

The main production equipment is:

- ① Six general-purpose rolling mill lines: all kinds of profiles which can tie 1.0~5.0 mm, the main products are floor, floor beam and other shelves, steel structure platform main structure;
- ② There are six lines of column rolling mill: after feeding the steel strip with the hole in advance into the rolling mill system, then pneumatic hydraulic automatic shearing according to the required length can be rolled 55, 80, 90, 100, 120, 150 columns. The whole system of rolling mill adopts bus control technology. The above advantages ensure that the ideal design value is achieved whether from the geometric size of section steel section shape or from the reasonable release of internal and external stress.
- ③ beam mill line has six: rolling beams of 80, 100, 120, 120, 130, 140, 160, two "C" beams extrusion forming to ensure the top and bottom of the beam, this structure has the advantages of large inertia distance, strong impact resistance and large bearing capacity;
- ④ Two rolling lines: complete the rolling molding on the mill line, automatic punching and cutting, so as to ensure the accuracy of the hole distance;
- ⑤ Welding production line: beam welding: the company has 15 semi-automatic CO2 automatic protection welding machine, special tooling assembly line layout, reasonable combination of man-machine, to ensure the stability of welding quality; Non-standard component welding (material thickness greater than 2.0 mm): sub-arc welding machine or DC welding machine, by licensed skilled workers to operate welding, to ensure the quality of welding to meet the requirements;
- ⑥ Automatic punching production line 2: its feeding system adopts high speed and high precision mechanical roller combined with die guide structure system, which fully ensures its accuracy.
- ⑦ Washing, cutting, folding and turning operation units: with 46 units, whose main products are column card, tray, integral laminate, safety gear shelf, and foot protection, etc.



Automated Warehousing Solutions

Shuttle Racking	1
Sub-bus	4
Automatic stereoscopic Warehouse	7
Automatic Sorting Conveyor	11

Traditional Industrial Storage Shelters

Pallet Racking	13
Double Deep Racking	17
VNA Pallet Racking	18
Drive In Racking	20
Gravity Racking	23
Push-back Racking	25
Cantilever racking	27
Mezzanine floor racking	29
Platform	31

Sorting Storage Shelves

Carton Flow Racking	33
Long Span racking	35
Light Laminate Shelving	37


Facilities

Steel Pallet	39
Plastic Pallet	40
Wooden Pallet	41
Wooden Boxes	42
Metal Material Box	43
Storage Cage	44
Logistics Vehicle	45
Climbing Trolley	46
Plastic Boxes	47
Hanging Plate	48
Metal Wall	49
Anti-collision Facilities	50





I .Automated Warehousing Solutions

Shuttle Racking System

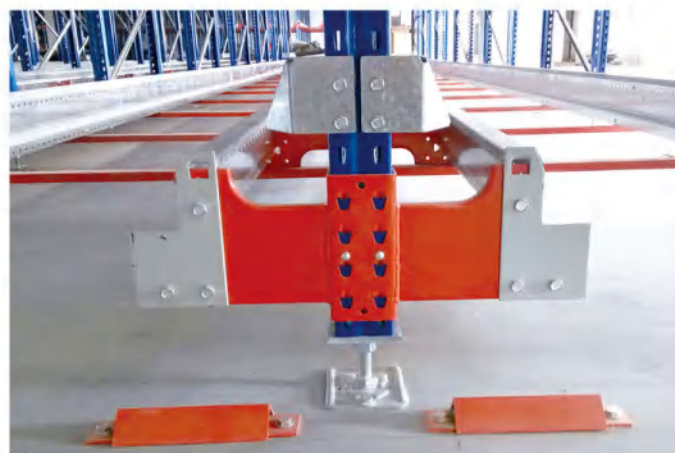


Mode of work:

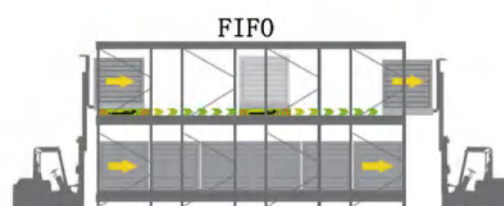
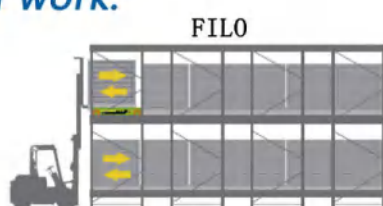



Shuttle storage system is an advanced warehouse storage management mode, which has high storage density, convenient storage and storage, high access efficiency, more kinds of goods management ability than traditional use shelves, and can also realize first-in-first-out and first-in-out functions. The whole system consists of special shelves and intelligent shuttle cars. After the expansion of the function, it can be combined with the automatic stacking system to form a more integrated automatic storage system.

The use of the shuttle shelf system is very convenient. First, the forklift truck is put into the front end of the track. The section of the track is inclined to facilitate the car to be placed, and then the goods are placed in the initial position of the track. At the same time, the car is placed in the initial position of the track, the remote control is made to press the automatic exit key, the shuttle carries the goods to the end of the track, the forklift takes it off, completes the exit action, and then turns to the next channel operation. Shuttle can also automatically switch A/B sides to achieve shuttle car access at both ends of the track.



-
- A yellow mobile robot, likely a Pioneer 3 mobile platform, is shown from a top-down perspective. It has a large black number '2' on its top deck. The robot is equipped with various sensors, including a camera mounted on the front, and has a black bumper. A label on the front indicates 'MAX. LOAD 1500 kg'. There are also some warning symbols, including a 'no walking' sign. The robot has two large black wheels and a smaller castor wheel at the back.

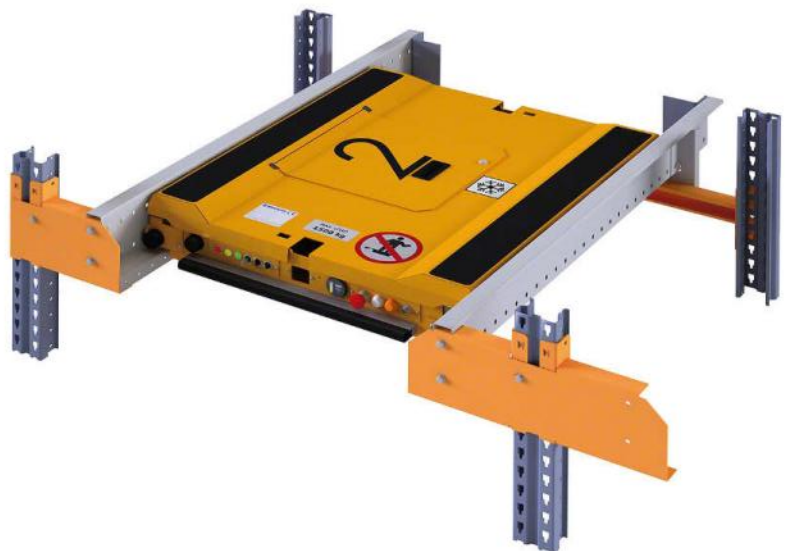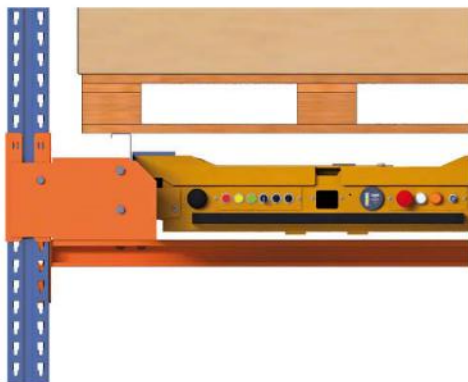

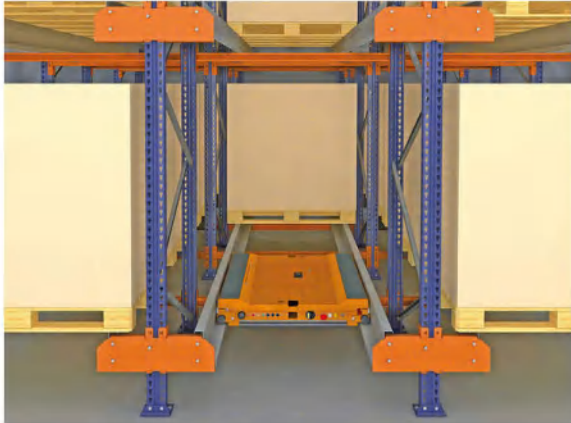

Main features of the shuttle:

**High standards of safety devices that effectively protect goods and staff;*

***Tray spacing can be adjusted from 40-150 mm every 10 mm;**

***Automatic unloading and continuous unloading;**

***Can achieve first-in-first-out or later-in-out;**

***Simple operation, rapid response, smooth operation;**


**Has the operation mode suitable for the minimum up to -30°C cold storage;*

**The shuttle can be customized;*


***Easy maintenance and maintenance;**

****Has a variety of patent functions; tray counting function, high efficiency tally function and so on.***

***High efficiency lithium battery: up to 1200 times charge; only charge 5.2 hours can run continuously for 16 hours.**

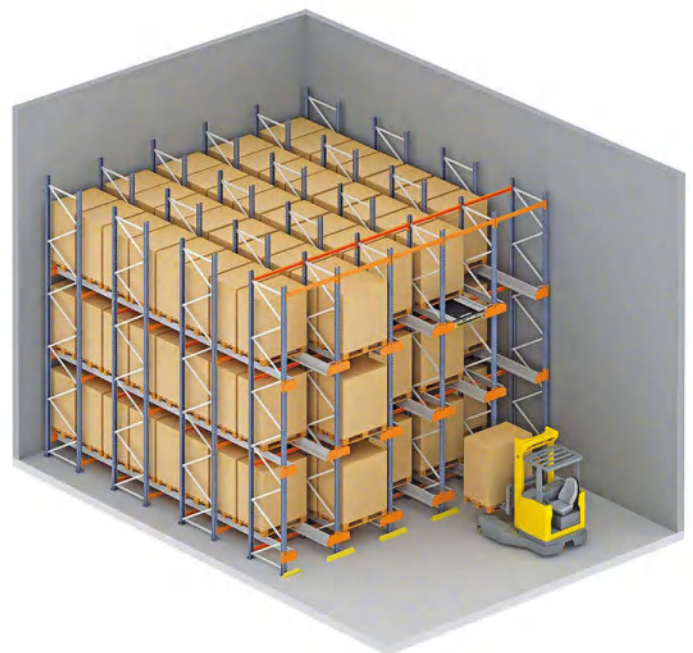

Dense Storage System For Sub-bus

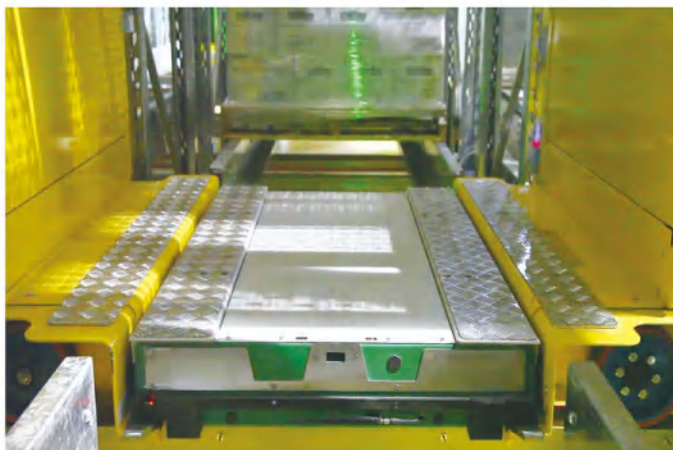

Sub bus shuttle system is a fully automatic dense storage system composed of shuttle bus, shuttle bus, walking track, roadway shelf, tray vertical hoist, tray conveying system, automatic control system, wireless storage control system (RWCS), storage management software (WMS) and so on.

Features of dense storage system for sub-bus:


- A perfect combination of intensive storage and automation systems for storage;
- the optimal choice of full automatic storage of bulk goods;
- the semi-automatic shuttle shelf system upgrade, and production, logistics system interconnection, seamless docking;
- the warehouse construction pattern, floor height, weighing requirements significantly reduced;
- Storage layout combination flexible, can achieve discontinuous floor, multi-area layout, fully automated storage
- perfect realization of goods first-in-first-out or first-in-out.






Characteristics of the sub-bus

Speed, efficiency	150M minutes
Power supply mode of bus	Safe sliding contact
Power supply	Supercapacitor
working temperature	-30°C to 35°C/-22°F to 113
colour	Yellow RAL 1021
Maximum load	1500kg

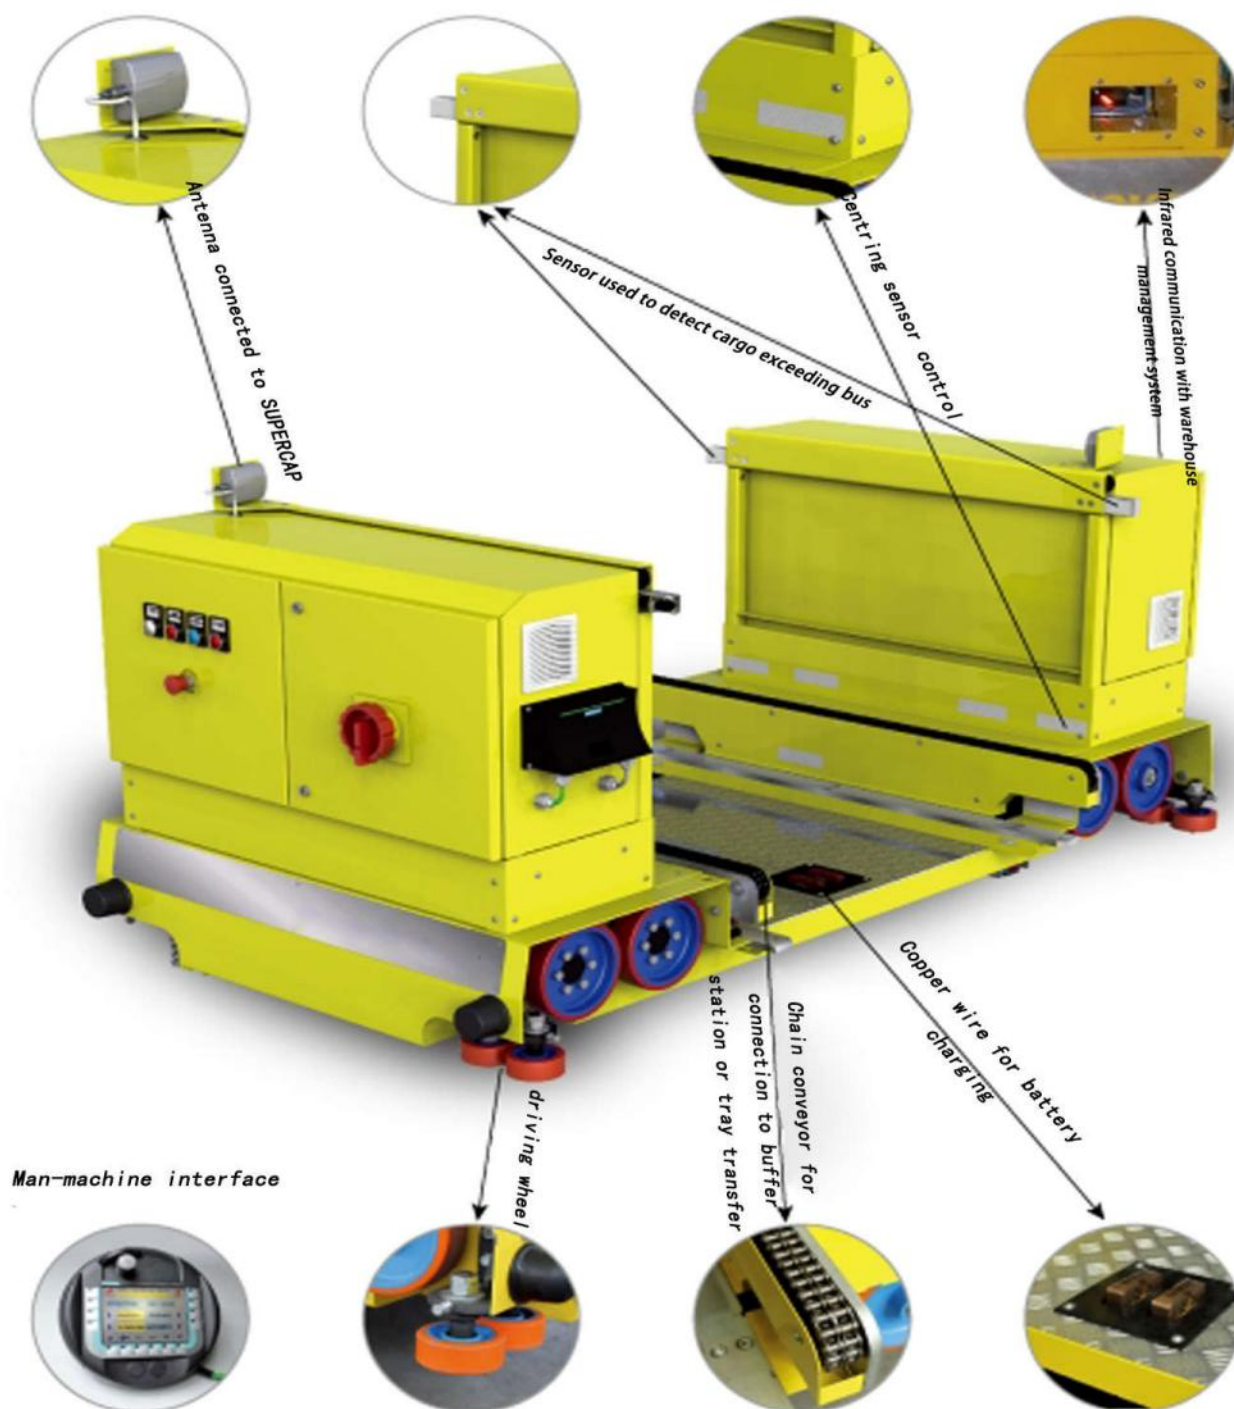





Automated Stereo Warehouse

Tray Stereo Warehouse




Container warehouse

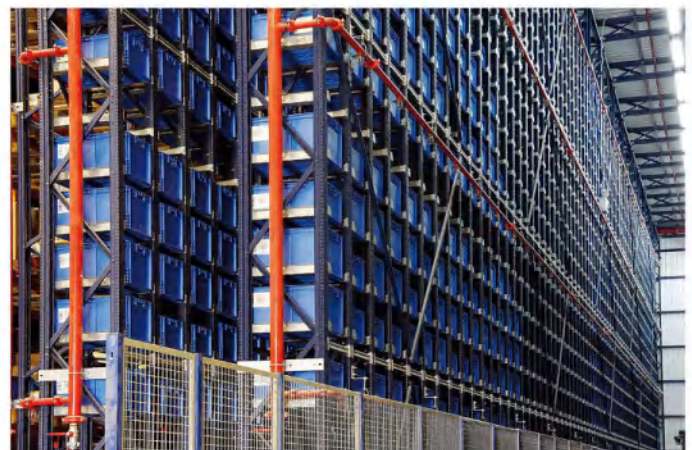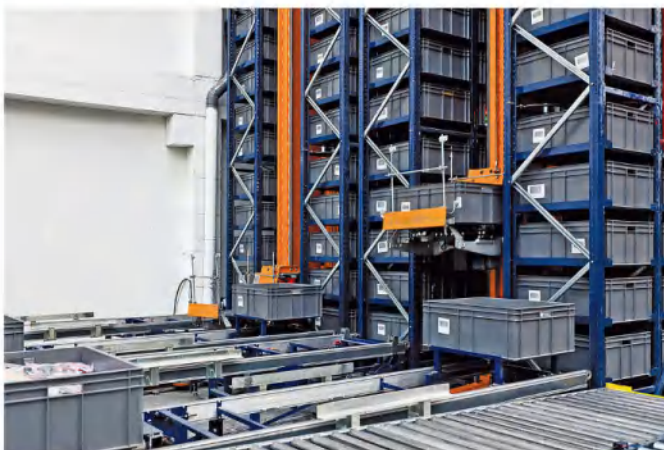

Automated Stereo Warehouse (AS/RS) is a complex automation system composed of stereoscopic shelf system, rail roadway stacker, incoming and outgoing pallet conveyor system, dimension detection bar code reading system, communication system, automatic control system, computer monitoring system, computer management system and other auxiliary equipment such as wire and cable bridge distribution cabinet, tray, regulating platform, steel structure platform and so on. Using the first-class integrated logistics concept, using advanced control, bus, communication and information technology, through the coordinated operation of the above equipment to carry out storage operations.

Applicable industries:

*Logistics Center *Food Industry *Low Temperature Industry *Pharmaceutical Industry
*Machinery Industry *Fashion Industry *Production and Storage Cosmetics Industry *Cosmetics industry
*Electrical/electronic industries *textile manufacturing



The most advanced technology is embodied in every detail of its structure

Integrated

- *Automatic in-and-out cycle
- *Improving productivity
- *Fixed inventory
- *Eliminate errors
- *The available temperature is as low as -30°C/-20°F environment

Electronic components


- *Infrared tube or WIFI communication
- *Read the forklift position by encoder
- *Detection of sliding and generating positions through laser sensors
- *Hydraulic buffer at end of passage
- *Through the double copper brush device to meet the main cable power supply and maintain voltage stability.
- *compact mechanical automation control panel with PLC、pass and control devices.
- *A sensor is placed on the stacker bracket for SKU center positioning and height control.
- *A safety system that meets the requirements of safety regulations.



Equipment

- *Equipped with steel columns to guide vertical landing in cargo access frame
- *Lifting and lifting operations using cables and command winches
- *Two separate electronic torque control motors
- *The operating system usually has a mechanical device, the user can choose the second according to the need, increases the speed and the steering palletizing machine standard.

Running Guide

- *The ground running guide rail is integrated with the upper shelf guide

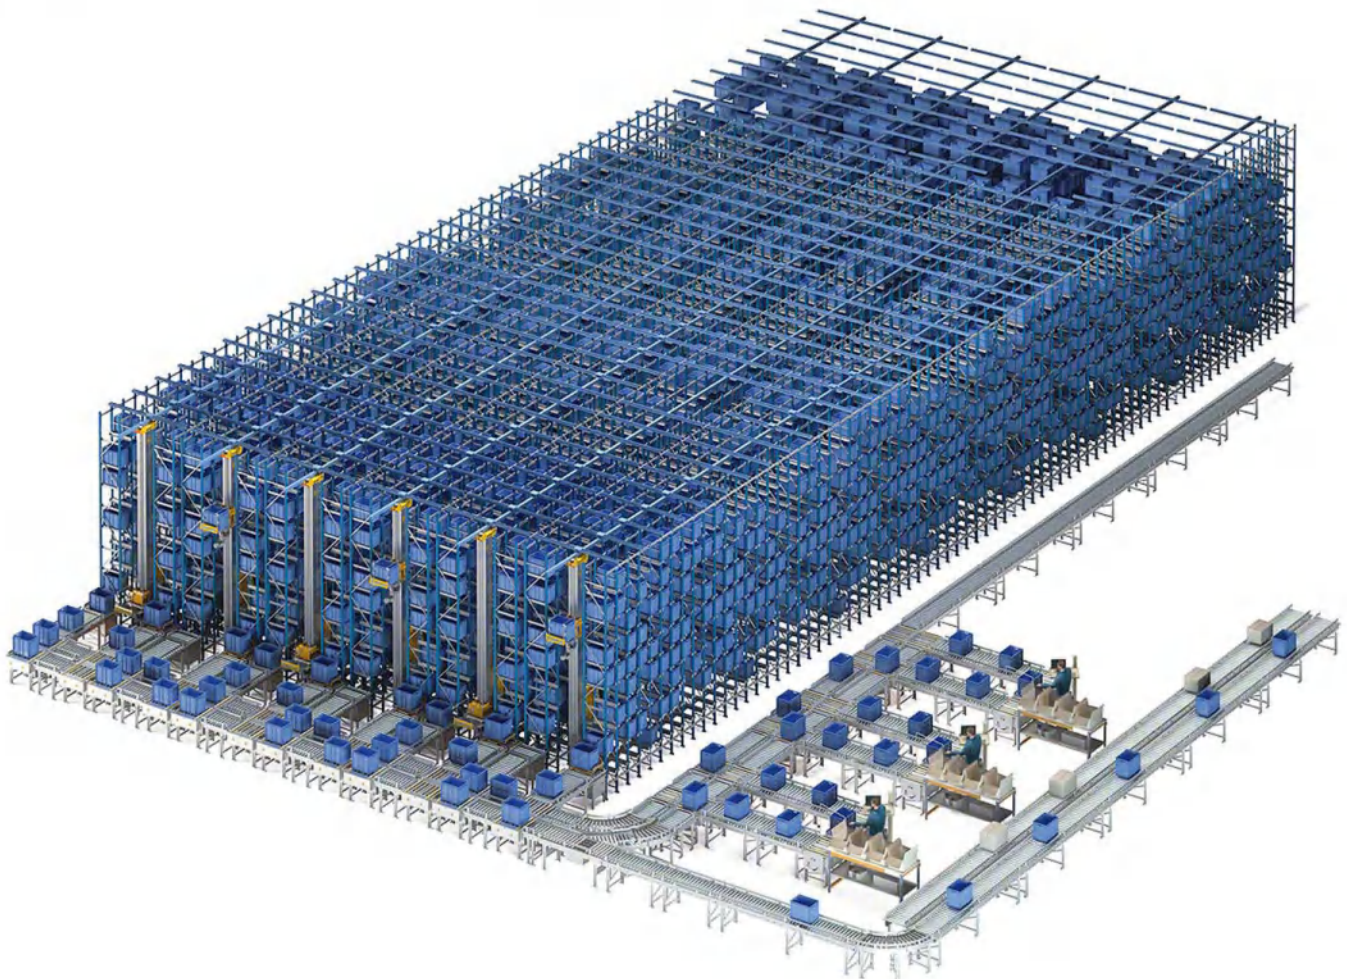

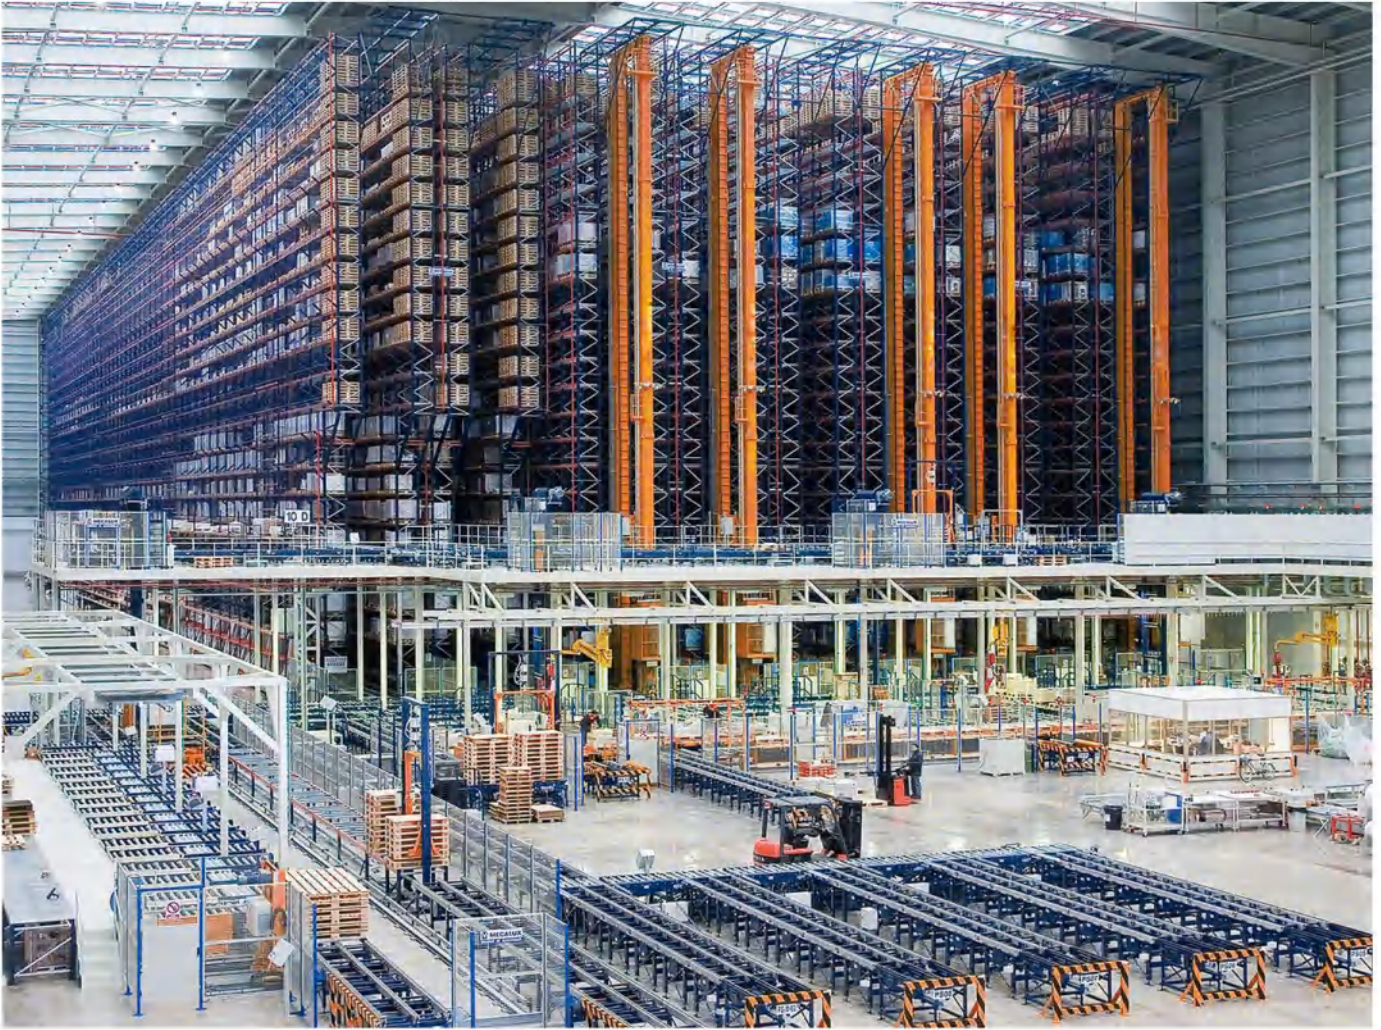



Automatic sorting system



Automatic sorting conveyor refers to the sorting and conveying equipment used to complete the product. The automatic sorting system is generally composed of automatic control and computer management system, automatic identification device, sorting mechanism, main transport device, pre-treatment equipment and sorting crossing. Automatic control and computer management system is the control and command center of the whole automatic sorting system. Its function is to identify, accept and process the sorting signal, and according to the sorting signal, the sorting mechanism classifies the product according to certain rules (such as variety, location, etc.), so as to determine the flow direction of the product. The source of sorting signal can be obtained by bar code (or QR code) scanning, keyboard input, quality detection, speech recognition, height detection and shape recognition. After information processing, it can be converted into corresponding picking list, storage list or electronic picking signal, and automatic sorting operation.



II .Traditional Industrial Storage Shelters

Pallet Racking



Beam shelf, also known as pallet shelf, adopts plug-in combination equipment matching structure, optimizes section design and high quality just now. The crossbeam and column are connected with plug-in link and equipped with safety pin to ensure the safety of crossbeam and column connection during forklift operation. Convenient and flexible storage, can be equipped with forward battery forklift, ordinary forklift and stacker and other handling and access equipment. The shelf consists of bearing column pieces and beams. The connection between the beam and the column piece is hung and provided with a safety pin, which can be adjusted by 50 or 75 mm pitch. The column sheet is connected with the ground by expansion bolts. Shelf bottom quality ground, generally 2-3 pallets per layer.



The length of the beam and the depth of the column are determined by the size of the tray. The shelf can be flexibly adapted to some safety or convenience components, such as tray block, limit beam, screen, anti-collision guardrail, anti-collision foot and connecting rod, etc. Shelf distribution is generally divided into standard channel type, narrow channel type, double depth cargo type, and with different forklifts. If more channels are arranged, the utilization rate of warehouse will be reduced, and the narrow channel and double depth cargo position will avoid this shortcoming. Because of its unique position management ability and convenient picking function, crossbeam shelf has become the first choice shelf type of logistics enterprises.

Advantages:


**applicable to any storage space, weight or cargo dimensions;*

**Can be combined with shelves for manual sorting;*


**In order to store more pallets, double-base shelves can be installed and another tray is placed in front of the 200 times tray.*

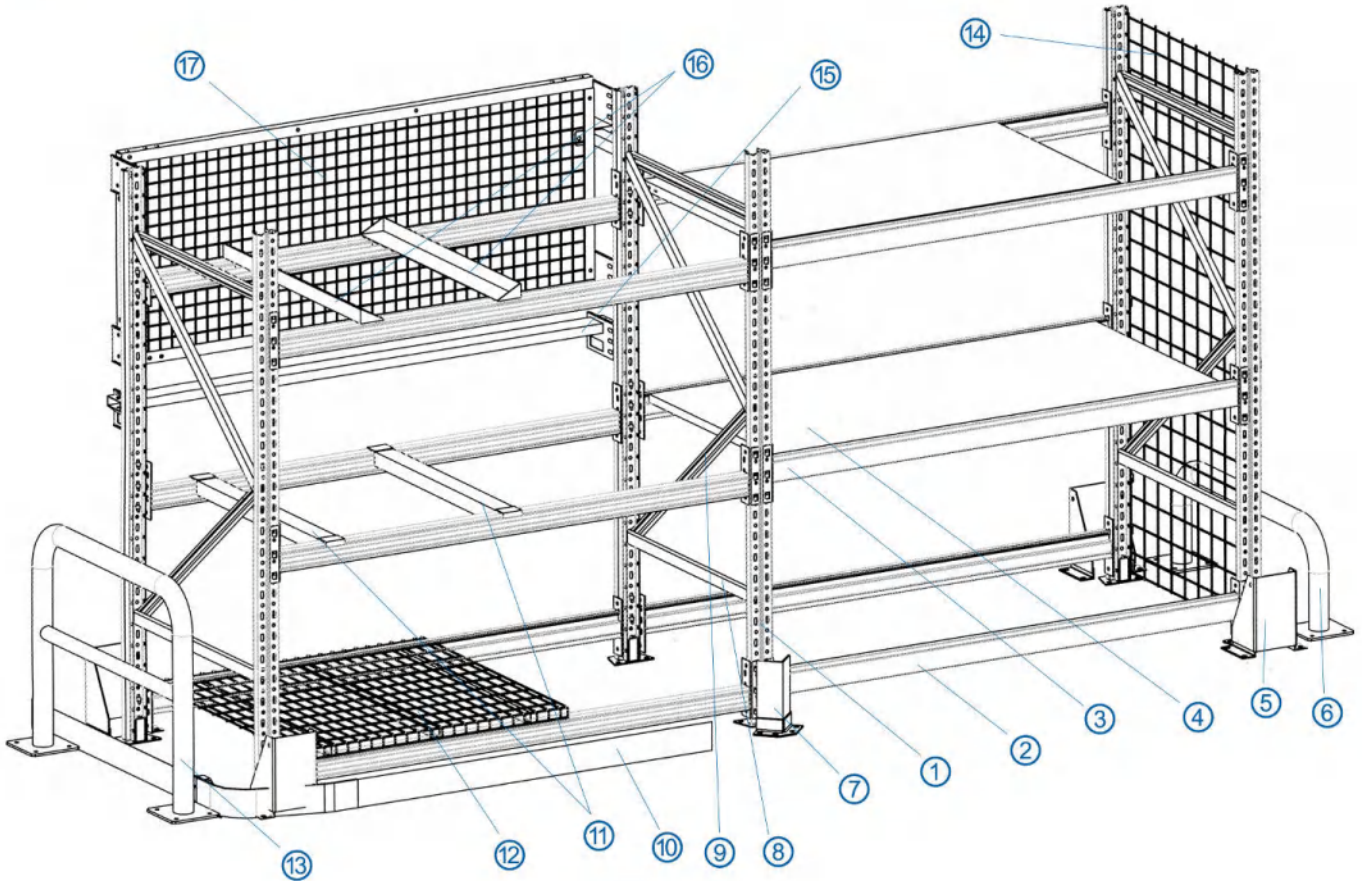


- | | | |
|-------------------|--------------------|----------------------|
| ① post | ⑦ V protector | ⑬ frame protector |
| ② box beam | ⑧ Horizontal brace | H=500mm |
| ③ P beams | ⑨ sway brace | ⑭ side protector net |
| ④ steel laminates | ⑩ Frame protector | ⑮ stop beam |
| ⑤ U protector | ⑪ Support bar | ⑯ Support bar |
| ⑥ frame protector | ⑫ Mesh decking | ⑰ back protector net |

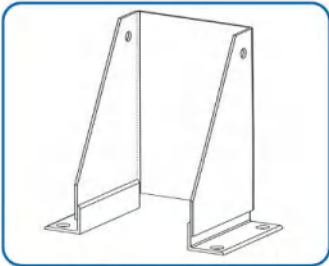


U protector

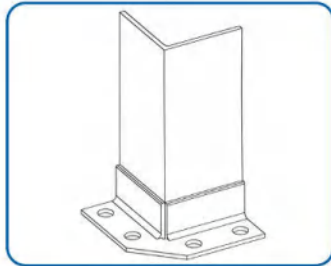


V protector




Frame protector




Link pole




Support bar1




Support bar2




Support bar 3



Support bar 4

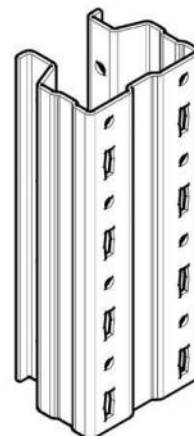


120*150mm



160*50mm

Box Beam								
	1800	2000	2300	2500	2700	3000	3300	3600
80*50*1.5	2000	1600	1200	1040	880	720	560	—
100*50*1.5	3360	2720	2080	1760	1520	1200	960	—
120*50*1.5	5200	4240	3200	2720	2320	1840	1520	—
140*50*1.5	—	5520	4160	3520	2960	2400	2000	1680
160*50*1.5	—	—	4720	4160	3520	2960	2640	2160






Advantages:

**Double the stock of common cross-beam shelves:*


**The construction cost of cargo space is the lowest cost of all three-dimensional warehouse systems.*



The storage or logistics center has the following characteristics to select the NVA pallet racking system:








- [illegible]





Advantages:


- [illegible]

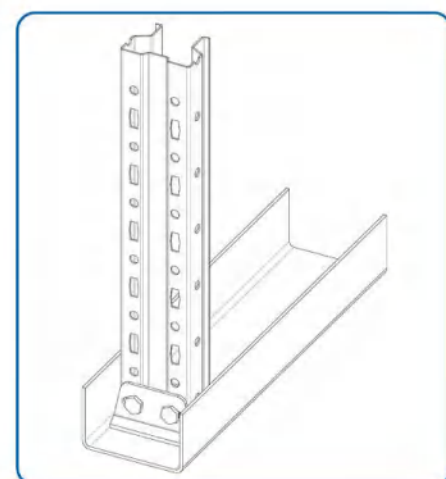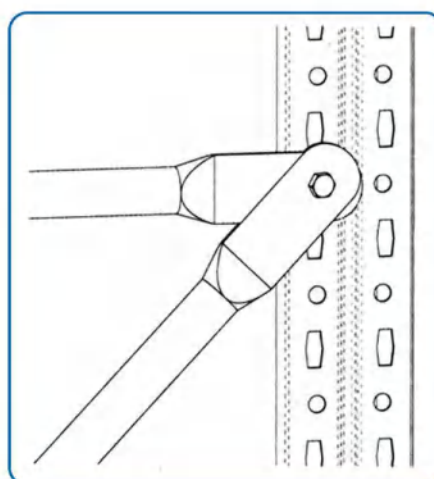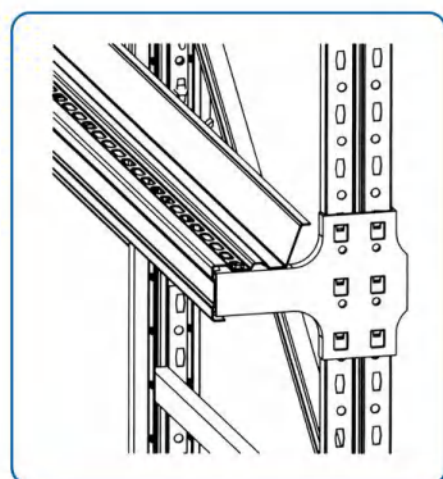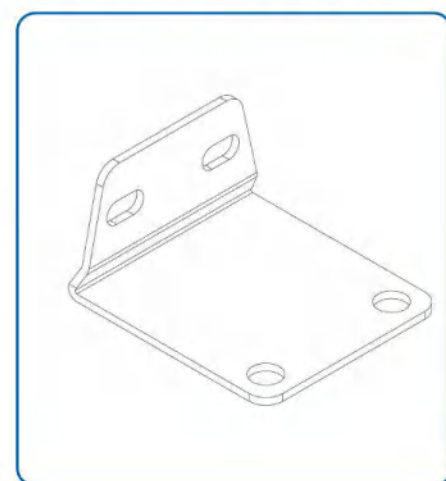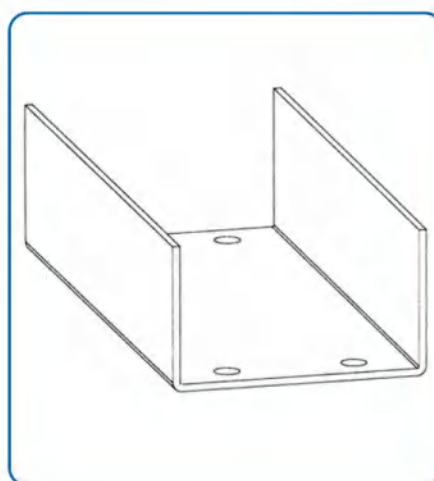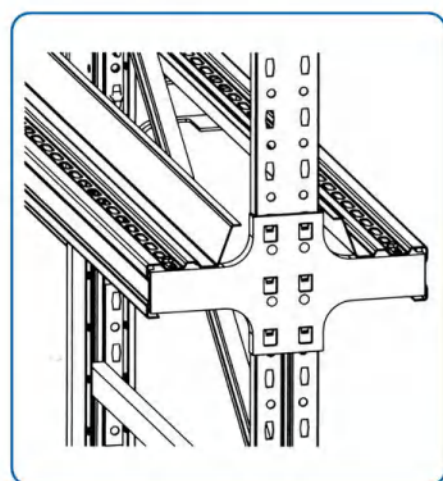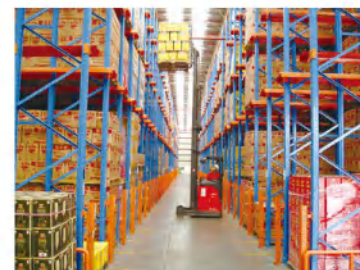





Gravity Racking

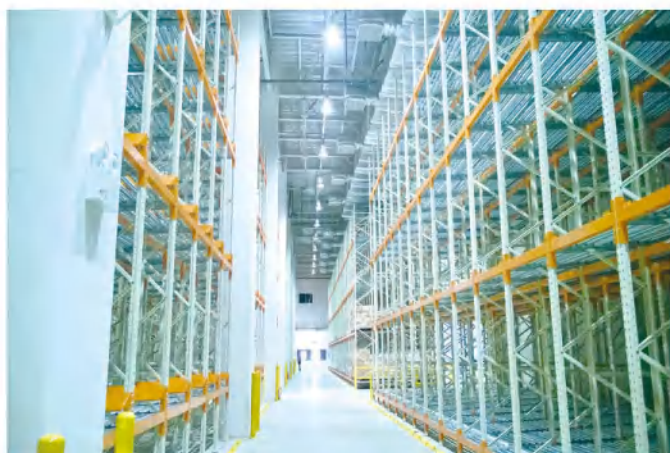

Add gravity roller track and slight slope Gravity Racking so that the tray can slide. It is introduced at one end of the higher track, and the goods are slid to the other end by gravity and velocity control, from which the goods are extracted.



The first-in-first-out storage system is adopted to make the movable storage complete product turnover and carry out the first-in-first-out operation of the tray thoroughly. This trait is ideal for short-term storage.

This system can be applied to the manufacture or sale of products in any industry (food industry, automobile industry, pharmaceutical industry, chemical industry, etc.), and its huge advantages provide great flexibility.



Advantages:

- *Improved pallet system*
- *Space savings and control of pallet time*
- *Eliminate interference with order preparation*
- *Excellent inventory control*

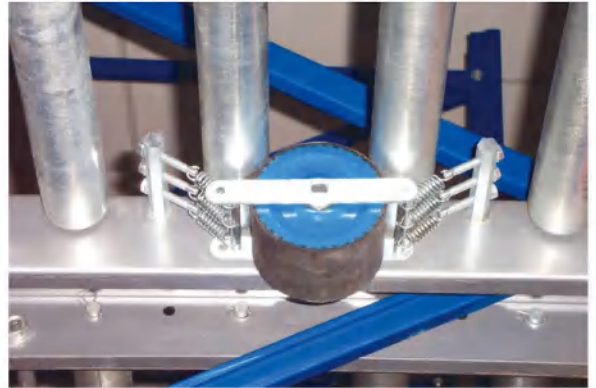




Push-back Racking





Suitable for centralized warehouse systems, each shelf layer allows up to four pallets of depth. Each tray is located on the same shelf floor, except for the last tray, placed above the cart for movement, driven by the running track. A storage system suitable for moderate turnover products, which can store more than two pallets of different fine products (last in, first out storage system).


Push-back racking are made up of columns, beams, tracks, pallet trucks, etc. The special track is fixed on the bearing capacity according to the set angle, and the pallet car runs on the track. The tray is nested, the incoming goods are pushed to the deep direction in turn, the outermost tray is taken when the goods are picked up, and the nearest adjacent tray automatically drops a cargo position due to gravity.

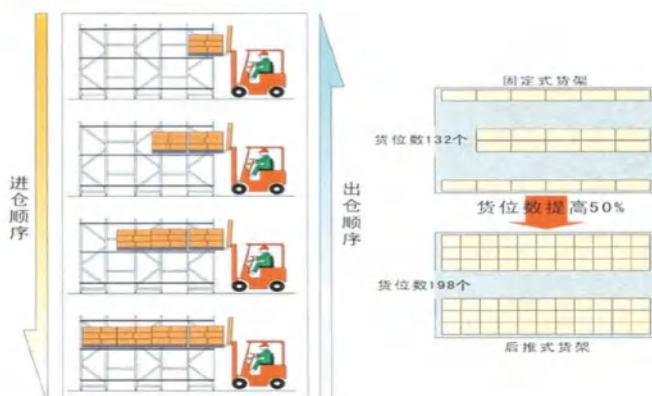




Advantages:






- * Making full use of space
- * Minimum loss rate in high space
- * Different types of products can be stored at each level.

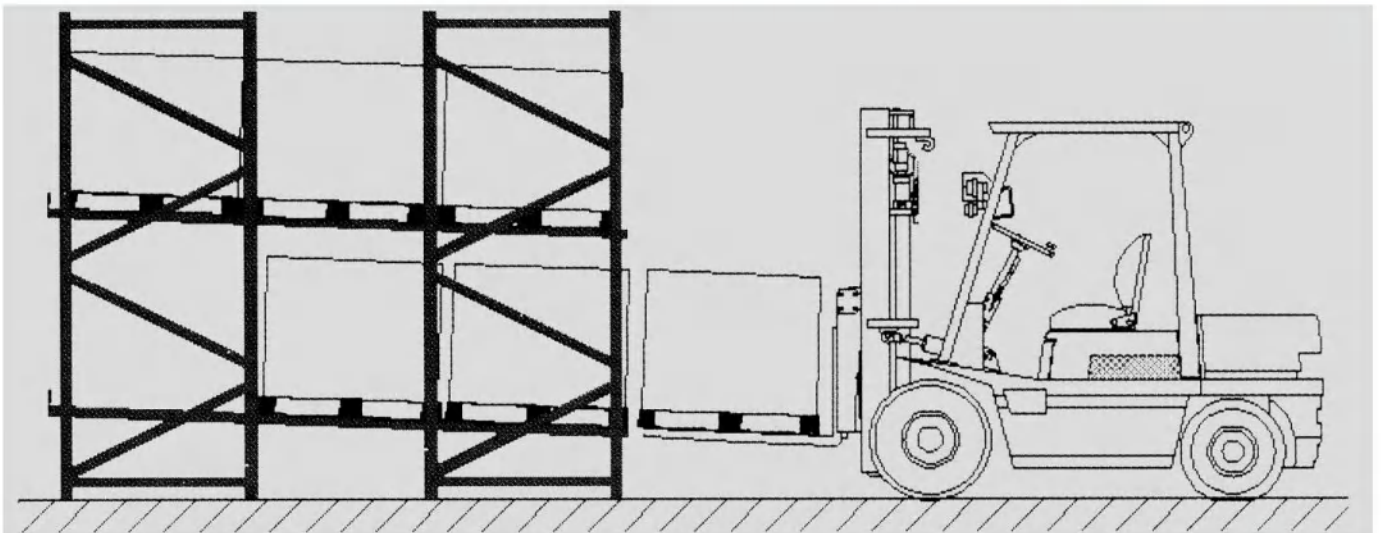

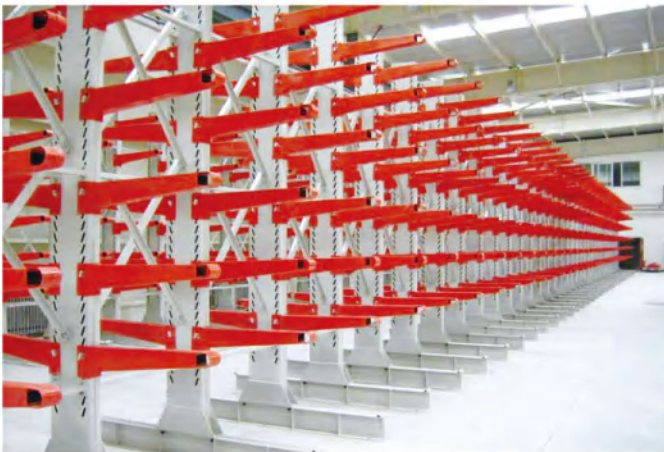

Case model:

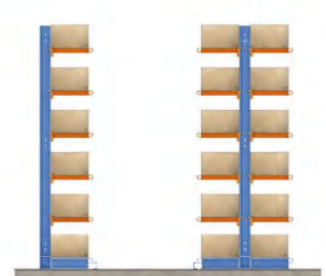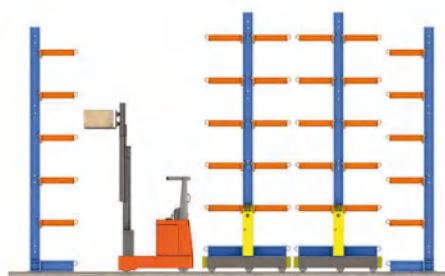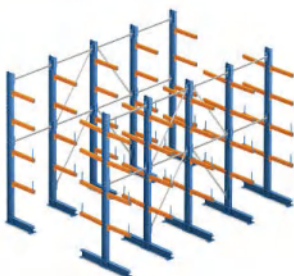

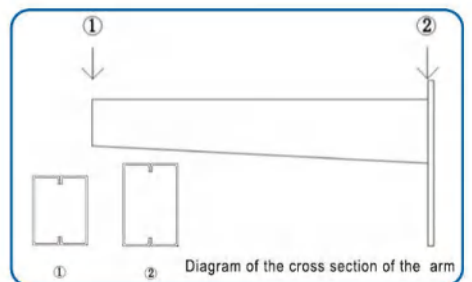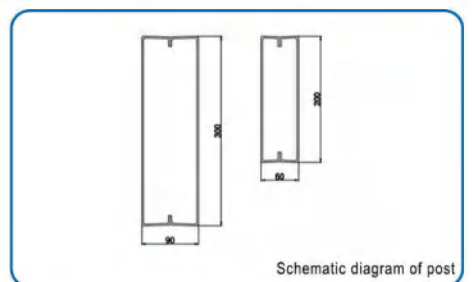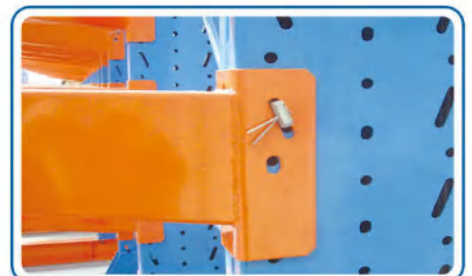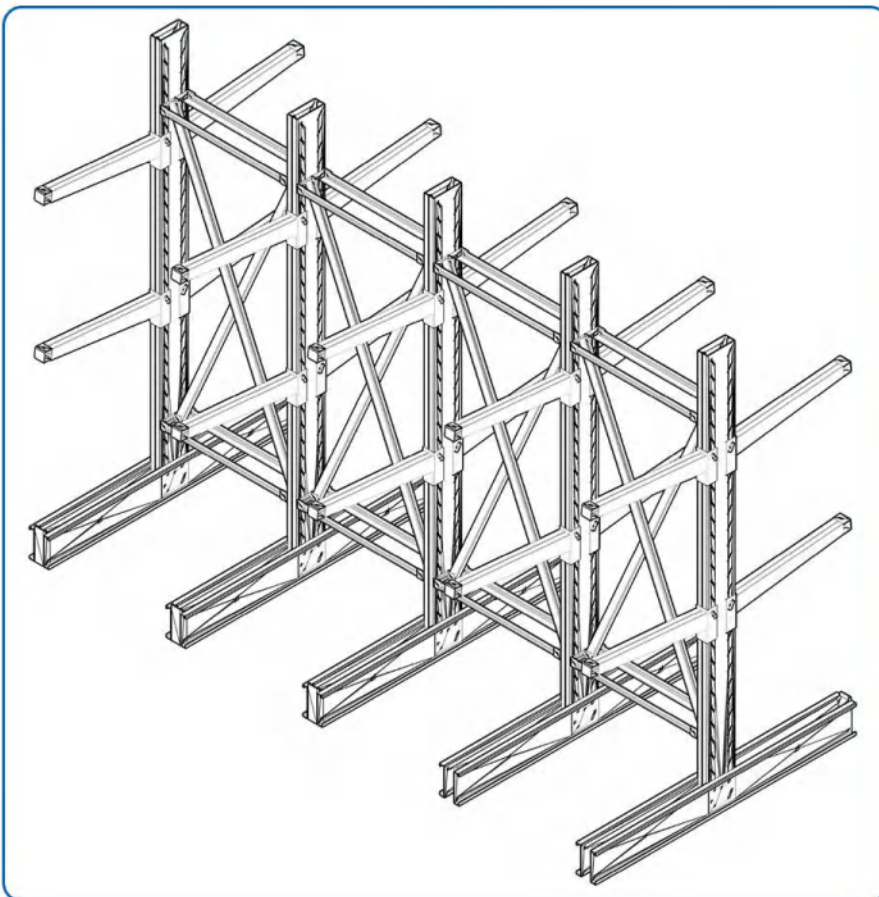



Mezzanine Floor Racking





Mezzanine floor racking adopt the layer type design, make the upper and lower body of the shelf add pedestrian passageway at the appropriate height, design into several storeys pavilion, the shelf has the facilities such as staircase and cargo hoist, so as to facilitate the goods to be suitable for the storehouse higher, the goods variety is more, the quantity is less. Large storage capacity, can make full use of space, save warehouse area. The attic shelf can also be supported by the bearing shelf, the steel floor is arranged at the top of the shelf, the lower part is the shelf, the upper part is the pattern of the zero whole cargo area code of the platform, and the shelf can also be laid out on the platform.

The whole design of the attic shelf is a plug-in and assembled combined structure, which does not need to be welded on the spot. The whole is beautiful, generous and safe and firm. Compared with concrete structure or steel structure, because the floor shelf itself plays the supporting role of the upper floor, it has the advantages of low cost, high space utilization ratio and fast construction, so it can be designed flexibly according to the actual site and needs.

Advantages:

- *Functional and high-performance
- *Easy to assemble
- *High inventory capacity and perfect stability
- *Applicable to all available space

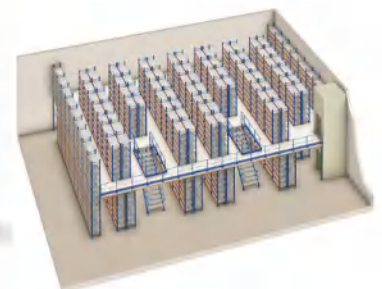



Platform






The steel structure platform refers to the use of square pipe, round pipe, H section steel or special C type, clasp beam as the main and auxiliary load bearing beam of the floor bearing layer, which is connected according to the connection mode required by the steel structure design code A shelf form in which high strength bolts and special fasteners are used to connect various parts and floor panels.

Floor can be selected according to customer needs punching floor or steel grille floor to meet the needs of enhanced lighting or fire spray. this type of shelf has the characteristics of beautiful appearance, large bearing capacity, safe and firm, flexible design, convenient use, convenient installation and so on. it is widely used in the workshop or warehouse area, effectively increasing the storage capacity of the warehouse, suitable for storage of goods that can be stacked and placed, the top floor of the platform can run pallet truck and so on. the design bearing capacity is generally less than 1000 kg/ m² . Suitable for hydraulic lift platform, cargo ladder and forklift to access goods. For higher warehouses can be designed into two or more layers of steel structure platform.

Advantages:

- * Adapting to the specific needs of each customer due to different sizes, sandwich types, build systems, etc;*
- *Increase warehouse or site area. Can fill other existing shelves;*
- *Quick and simple assembly.*

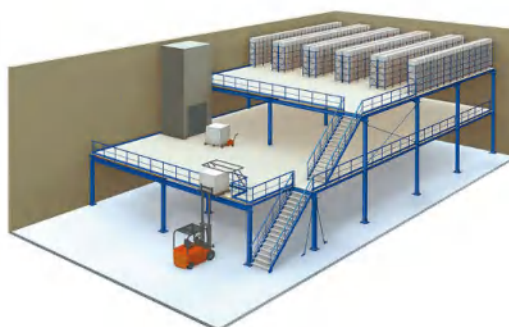


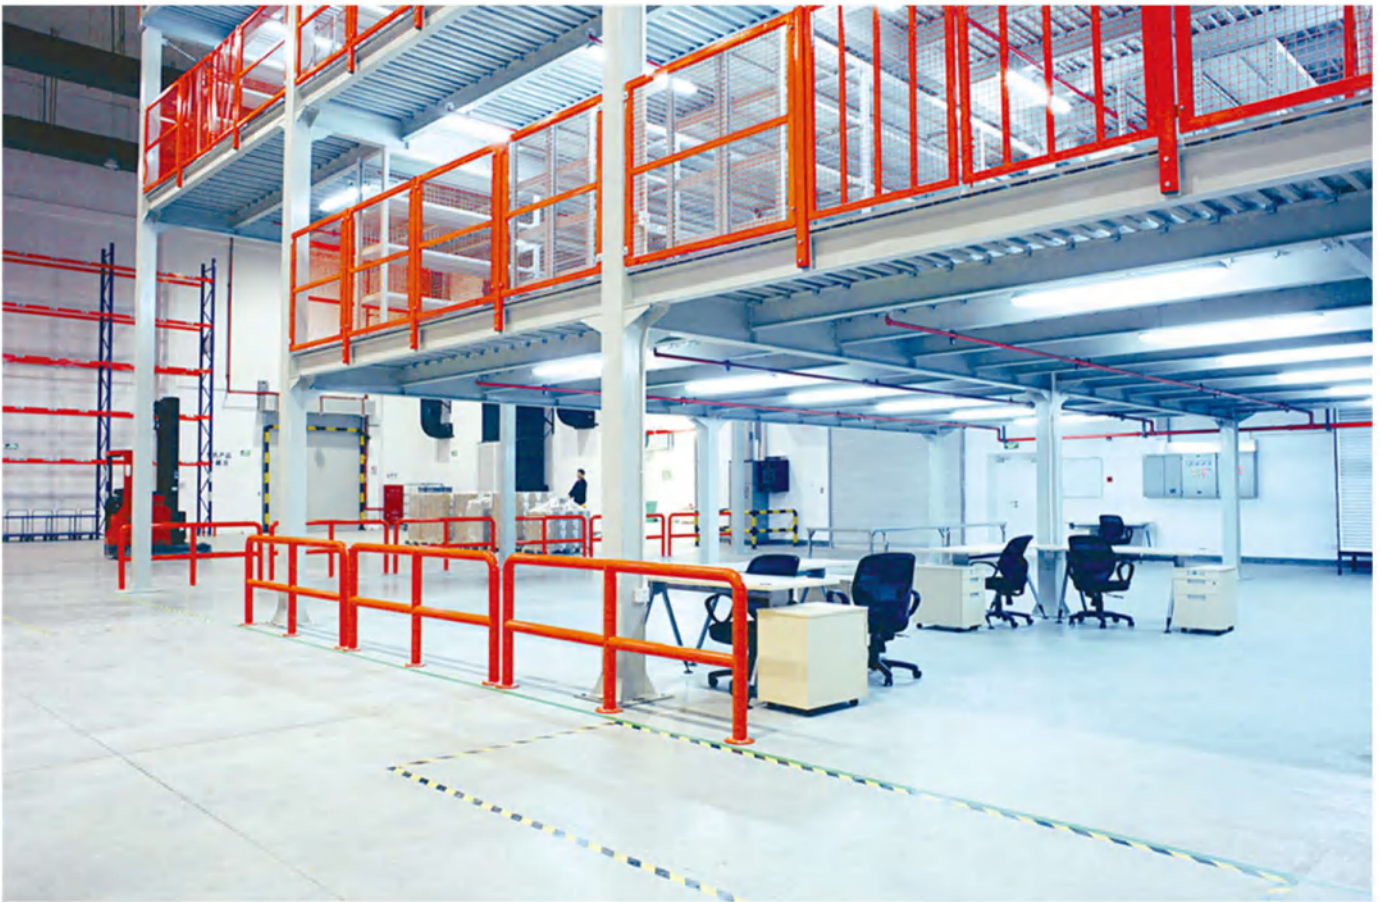



Carton Flow Racking consists of shelf column, front and rear retaining beam, support beam, limit beam, fluent strip (Lu alloy type or sheet metal type), fluent strip fixing parts, deceleration plate, etc. The shelf layer is high and the slope is adjustable. Because of its first-in-first-out characteristics, it is mainly suitable for the transfer of goods between the work stations of the factory workshop by selecting the required distribution center (DC) and the factory workshop.

[illegible]



Structural characteristics:

Fluency bars of the fluency shelf are directly connected to the front and rear beams and the middle supporting beams, which are hung directly on the columns. The fluency bar installation inclination depends on the size, weight and depth of the container, usually 5-9, and the bearing capacity of the fluency roller is 6 kg/. When the goods are heavy, 3-4 fluency bars can be installed in a raceway. A support beam is usually installed every 0.6 m in the depth direction to increase the stiffness of the fluency strip. When the raceway is longer, the raceway can be separated by a separator. . The cargo end needs to install brake pads to slow down the cargo and reduce the impact.

Advantages:


- *Use roller type aluminum alloy (or sheet metal fluency strip), using the weight of goods to achieve first-in-first-out goods;*
- *Easy access, suitable for both sides of assembly line, distribution center, etc;*
- *Suitable for mass storage of equivalent goods, high space utilization, especially*
- *suitable for auto parts factory;*






This shelf type has the characteristics of large bearing capacity, stable structure and unlimited specifications (height and length). It can be designed as a three-column column sheet according to the need to solve the problem of too deep and too large single layer load. The shelf is suitable for storing heavy load products such as hardware and electrical materials and machine repair components. The shelf can also be used to design the preferred shelf form of multi-storey attic shelves. The use rate, while the narrow channel type and the double depth type cargo position arrangement avoids this shortcoming better. Because of its unique position management ability and convenient picking function, crossbeam shelf has become the preferred shelf type for logistics enterprises.

**With a variety of components, can meet all requirements.*



P cross section diagram:

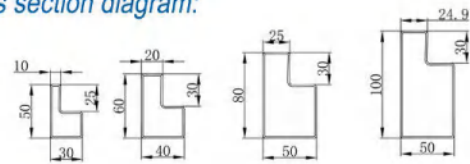

Beam carrying table:

P steel pipe	length	1500	1800	2000	2200
60*40*1.0		450	350	300	250
60*40*1.2		550	450	400	350
80*50*1.2		1400	1100	900	700
80*50*1.5		1500	1200	1000	800

- *The shelf material selects the domestic large-scale iron and steel group high-quality cold rolled steel plate to make meticulously;
- *Shelf surface after pickling, phosphating, passivation, electrostatic spraying, high-temperature curing process;
- *Shelf size is tailored to customer needs.



Highlights;

- *Adopt 12 fold angle 13 face column;
- *Adopt 2 reinforced P type tube;
- *The transverse support is the same as the heavy shelf.






Stable type;

Flexibility:

Beauty:

Butterfly hole shelf with polishing, surface rust removal, deoiling, electrostatic powder spray and other treatment methods, according to the customer designated color spray, with beautiful color, not easy to oxidize, easy to clean and other advantages.



Large Butterfly Hole - Light Laminate Shelf				
Column specifications	80*40			
P beam specifications	60*40			
Shelf specifications(length*width.height)	1500*500*2000	1500*600*2000	2000*500*2000	2000*600*2000
Maximum load per layer	150kg	150kg	170kg	170kg



Steel Pallet



GT02 Steel Pallet



GT04 Steel Pallet



GT06 Steel Pallet

Wooden Pallet



MT01 wooden pallet



MT02 wooden pallet



MT03 wooden pallet



MT04 wooden pallet



MT05 wooden pallet



MT06 wooden pallet

Wooden Boxes



MB01 Traditional packing boxes



MB02 Split case



MB03 European Coaming Box



MB04New packing boxes

Wooden packing box is the most common packing box at present.

Solid wood packing box:

* Solid wood packing box is solid wood (pine, poplar, hardwood, etc.) with large load capacity, quality and cheap, can be used repeatedly. The disadvantage is that export needs fumigation, fumigation is only 28 days (domestic 7 days, foreign 21 days).

Plywood boxes:

**Plywood packing box is made of synthetic sheet, which has the advantages of no fumigation and no inspection, high load, waterproof, non-toxic and low price. It is the most common export packing box.*

Export packing boxes:

**Export packing box, also known as: export solid wood packing box, export wooden box, plywood box, fumigation free packing box, etc., refers to the packaging container used in the transportation of export goods.*

High-grade packing boxes:

**High-grade packing box, packing box is mainly used to upgrade the packaging grade of products, enhance the image of products, mainly small wooden packing boxes, boxes.*

Metal Material Box



WL01 Metal material cages



WL02 Metal material cages



WL03 Metal material cages




WL04 Metal material cages



WL05 Metal material cages



WL06 Metal material cages




Storage Cage



CL01 storage cage



CL02 storage cage

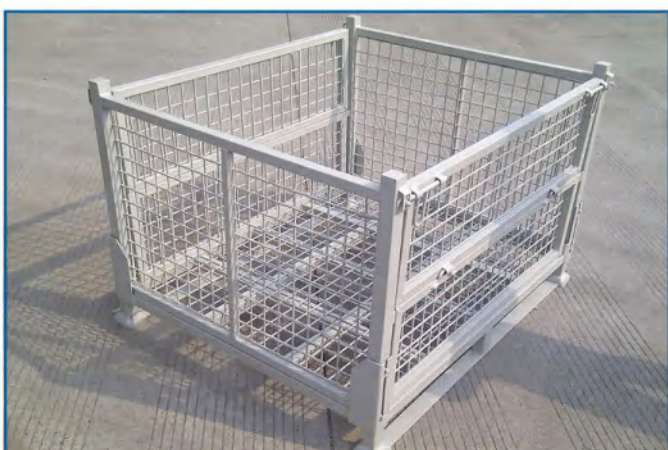

CL03 storage cage



CL04 storage cage



CL05 storage cage



CL06 storage cage

Logistics Vehicle



TC01 Logistics Vehicle




TC02 Logistics Vehicle



TC03 Logistics Vehicle



TC04 Logistics Vehicle



Climbing Trolley



DS01 Climbing trolley



DS02 Climbing trolley

**DS03 handcart**

DS04 handcart



DS05 handcart



DS06 handcart




SZ02 Plastic Boxes



SZ04 Plastic Boxes



SZ06 Plastic Boxes



Hanging Plate



GB01 Series of Combined Hanging Frame



GB02-EU1



GB02-EU2



GB02-EU3

GB02 EU Parts Box Series





GB03 Part Box Hanging Frame Series



GB04 Standard Parts Box Series

Metal Wall



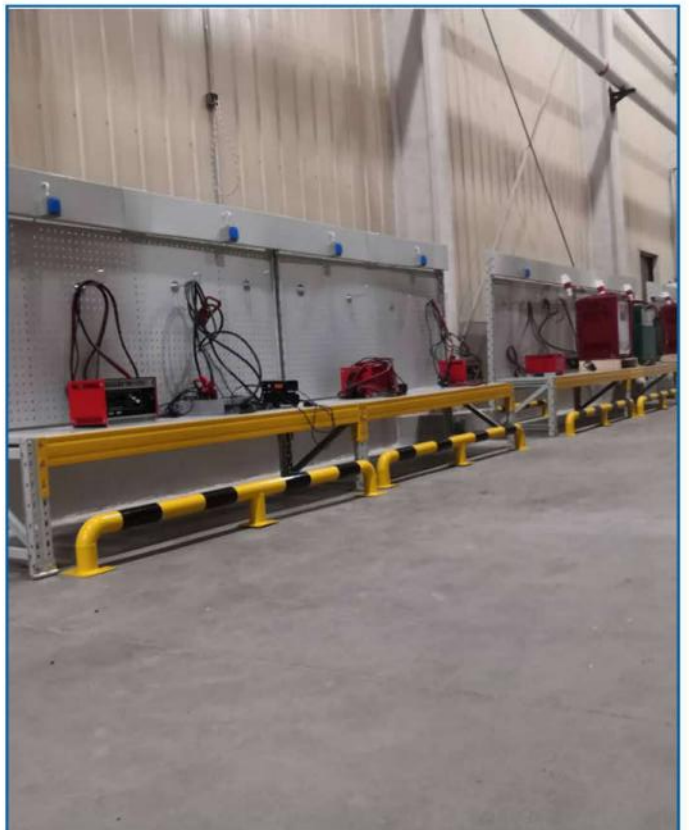

Racking Section Bar

Racking Section Bar Product Specification and Picture List

NAME	Section Size	Thickness	3D Picture
Punching Frame	55*50	1.0-2.0	
	65*50	1.0-2.0	
	80*50	1.5-2.0	
	90*70	1.5-2.5	
	100*70	2.0-2.5	
	120*70	2.0-2.5	
	120*95	2.0-2.5	
Box Beam	80*50	1.5-2.0	
	100*50	1.5-2.0	
	120*50	1.5-2.0	
	140*50	1.5-2.0	
	160*50	1.5-2.0	
	180*50	1.5-2.0	
	200*50	1.5-2.0	
Pallet Beam	平面 Flat Surface	2.0-2.75	
	Punch & Reinforce	2.0-2.75	
Flat Surface Floor	200*40	2.0-2.75	
Punching floor	200*40	2.0-2.75	
Pallet Panel	100*25	1.2-2.0	
	110*25	1.2-2.0	
	120*25	1.2-2.0	
Cantilever Frame	200*80	2.0-2.5	
	300*80	2.0-3.0	
Horizontal& Diagonal Bracing	19*40	1.2-1.5	
	24*40	1.2-1.5	
	29*40	1.2-1.5	
	50*37	1.2-1.5	
Guard Rail	90*45L	4.0	
	100*80L	6.0-10.0	
Roller Trestle	120*40	2.0-2.5	
Sliding door Guide	89*24	2.5-3.0	
Z-type Section Bar	30*50*30	1.5-2.5	



HE-1 Forklift



HE-2 truck



HE-3 carrier-and-stacker



HE-4 Forklift



HE-5 Forklift



HE-6 Forklift



HE-7 Forklift



HE-8 Forklift

Refine on Intelligent Manufacturing by Satong

Jiangsu Satong Intelligent Logistics Equipment Co., Ltd

TEL: +86 516 8655 1980 E-mail: rack@satong.net

MOB: +86 133 9527 1980 Website: www.satong.net

Add: No.4 Fuxing Road, Industrial Park of Tushan Town,
Pizhou City, Xuzhou City, Jiangsu Province, China



Wechat Scan QR Code



Chinese Mini Programs



English Mini Programs