
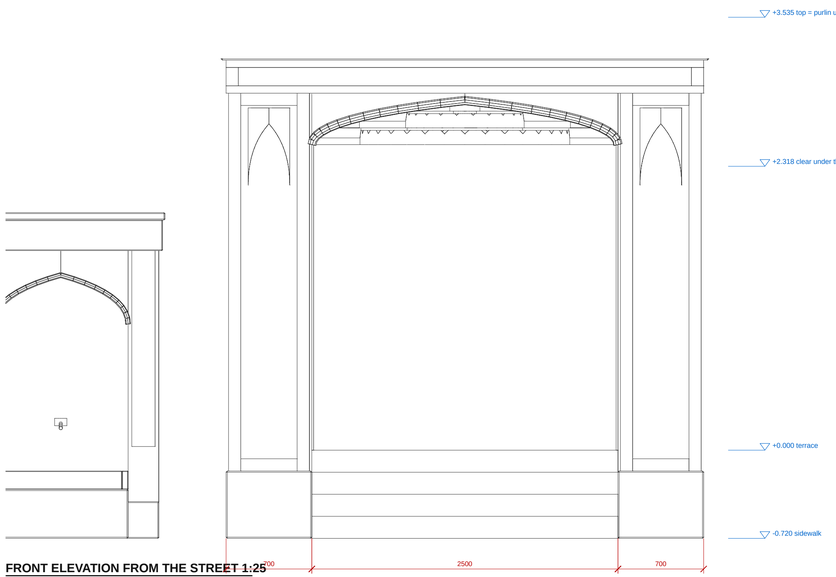



FRONT ELEVATION FROM THE STREET 1:25

glazed-brick pylons, kufic frames, majolica panels, epigraphic band, muqarnas half-vault; sebil on the left

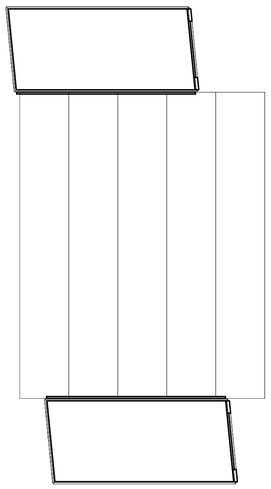

PLAN AT +1.050 ABOVE THE SIDEWALK 1:25

pylons follow the street line (sheared 5.6°)

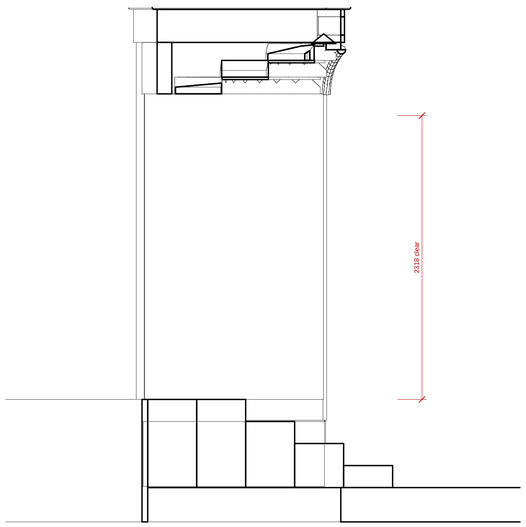

SECTION C-C ON THE PORTAL AXIS 1:25

entrance steps 4 x 180, muqarnas half-vault (3 tiers of niche cells)

NOTES

Pylons: RC core 400 + glazed brick facing (hazarbaf), stone plinth 550; they carry the roof beams at gridlines 3 and 4 (encasing columns C1).
Front: kufic glazed-brick frames 100, majolica panels with pointed niches, epigraphic band; turquoise roll on the arch edge.
Muqarnas: 3 tiers of GRC niche cells (cobalt / turquoise glazed), precast from the model, hung on a steel cradle from the lintel.
Rev. 8: headroom raised from 1 480 to 2 320 clear above the terrace at the lowest muqarnas cell (portal top taken to the purlin underside).
Sebil: wall fountain, glazed brick + majolica tympanum, bronze spout, stone basin with recirculating pump.

SAMARKAND — Uzbek / Tajik restaurant terrace · 254 Vo Nguyen Giap, Da Nang

Street portal (pishtaq, Gur-e-Amir type) + sebil

Drawn from the 3D model (closed-shell, QA-clean); dimensions in mm, levels in m from the finished terrace floor ±0.000

Sheet S-05 Rev R12-v8.3 2026-11-04 A1 Construction set — verify on site before fabrication