




REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE





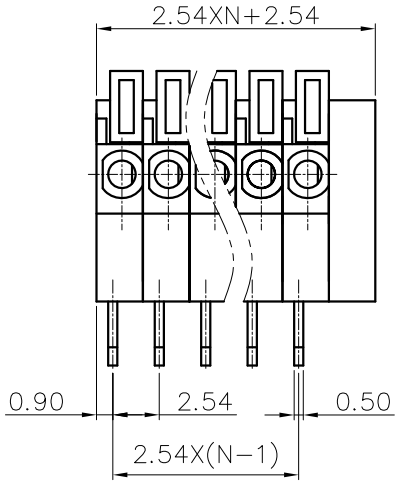

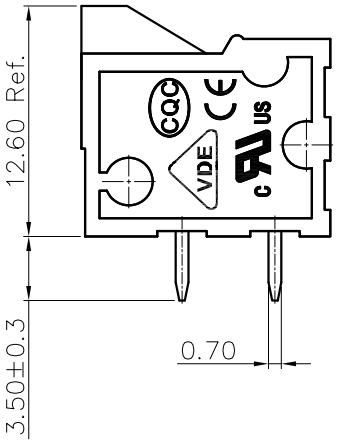

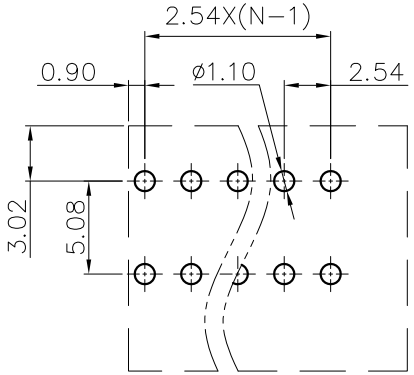

PCB LAYOUT

NOTES1:
UL Standard
1.Rated voltage/current : 150V / 2A
2.Wire range : 24~20AWG
IEC Standard
1.Rated voltage/current : 130V / 6A
2.Wire range : 0.2~1.0mm²

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch :2.54mm, Poles : N=01~XXP
3.Stripping length : 11mm
4.Withstanding voltage : AC1300V/1Min.
5.Operating temperature: -40°C~+105°C
6.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

7.RoHS Compliance

DG141R - 2.54 - XXP - 1Y - 00A (H)
- (Series No.)
- (Pitch)
- (Poles)
- (Single Pitch)
- (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)
- 00A-(Standard)
- (H)-(RoHS)

DETACHED LISTS	PART NO.: /	DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD: /	NAME: DG141R-2.54-XXP-1Y-00A(H)	
	CHKD: /		
	DRFT: /	TITLE: CUSTOMER DRAWING	REV D0
	THIRD ANGLE PROJECTION	DRAWING NO.: /	SHEET 1/1
		MM (INCH) DO NOT SCALE DRAWING	SCALE 1:1