FLEET

BUILDING THE FUTURE TOGETHER

PRODUCT CATALOGUE

FLEET INDUSTRIES PRIVATE LIMITED

FL100A1



FL12A



CHM2



FL-114A



HB-50



FL-315H4



Building the future together – with unmatched quality and dedicated service

+91 83830 36046 · +91 89015 84802

sales@fleetindustries.co.in · info@fleetindustries.co.in

CONTENTS

Machines · tools · spare parts

Pipe Threading Machines	12 items	3
Roll Grooving Machine	6 items	9
Pipe Cutting Machine	4 items	13
Hole Saw Cutting Machines	5 items	15
Pressure Test Pumps	3 items	18
Butt Jointing Machine	12 items	20
Pipe Bending Machines	5 items	26
Spare Parts	29 items	30

PIPE THREADING MACHINES

Robust threading machines for cutting precise pipe threads on site or in the workshop.

FL50A

PIPE THREADING

FL50A Heavy-Duty Pipe Threading Machine

½" – 2"

Heavy-duty 2" threading machine with a 1000 W induction motor.

MODEL	FL50A
Capacity	½" – 2"
Motor	1000 W (induction)
Voltage	220–240 V, 50 Hz
Speed	30 RPM
Weight	58 kg
Standard accessories	One set ½"–¾" SS dies, one set 1"–2" SS dies, one ½"–2" die head, 2 L oil, stand

- Threads pipe from ½" to 2"
- 1000 W induction motor
- Supplied with SS dies, die head, oil and stand

FL50A



FL50A1

PIPE THREADING

FL50A1 Pipe Threading Machine

½" – 2"

FL50A1



2" threading machine with a 900 W motor.

MODEL	FL50A1
Capacity	½" – 2"
Motor	900 W
Voltage	220–240 V, 50 Hz
Speed	28 RPM
Weight	53 kg
Standard accessories	One set ½"–¾" alloy dies, one set 1"–2" alloy dies, one ½"–2" die head, 2 L oil, stand

- Threads pipe from ½" to 2"
- 900 W motor
- Supplied with dies, die head, oil and stand

FL50B1

PIPE THREADING

FL50B1 Heavy-Duty Auto-Cut Pipe Threading Machine

½" – 2"

Heavy-duty 2" auto-cut threading machine with a 1000 W induction motor.

MODEL	FL50B1
Capacity	½" – 2"
Motor	1000 W (induction)
Voltage	220–240 V, 50 Hz
Speed	30 RPM
Weight	58 kg
Standard accessories	One set ½"–¾" SS dies, one set 1"–2" SS dies, one ½"–2" die head, 2 L oil, stand

- Threads pipe from ½" to 2"
- Auto-cut
- 1000 W induction motor
- Supplied with SS dies, die head, oil and stand

FL50B1



FL100A

PIPE THREADING

FL100A Heavy-Duty Pipe Threading Machine

½" – 4"

FL100A



Heavy-duty 4" threading machine with a 1300 W induction motor.

MODEL	FL100A
Capacity	½" – 4"
Motor	1300 W (induction)
Voltage	220–240 V, 50 Hz
Speed	30 / 14 RPM
Weight	130 kg
Standard accessories	One set ½"–¾" SS dies, one set 1"–2" SS dies, one set 2½"–4" SS dies, one 2½"–4" die head, one ½"–2" die head, 2 L oil, stand

- Threads pipe from ½" to 4"
- 1300 W induction motor
- Two-speed operation (30 / 14 RPM)
- Supplied with dies, two die heads, oil and stand

FL100A1

PIPE THREADING
FL100A1 Pipe Threading Machine

½" – 4"

4" threading machine with a 1100 W motor.

MODEL	FL100A1
Capacity	½" – 4"
Motor	1100 W
Voltage	220–240 V, 50 Hz
Speed	24 / 9 RPM
Weight	130 kg
Standard accessories	One set ½"–¾" alloy dies, one set 1"–2" alloy dies, one set 2½"–4" alloy dies, one 2½"–4" die head, one ½"–2" die head, 2 L oil, stand

- Threads pipe from ½" to 4"
- 1100 W motor
- Two-speed operation (24 / 9 RPM)
- Supplied with alloy dies, two die heads, oil and stand

FL100A1



FL150A

PIPE THREADING
FL150A Pipe Threading Machine

2½" – 6"

FL150A



6" threading machine for pipe from 2½" to 6".

MODEL	FL150A
Capacity	2½" – 6"
Motor	1100 W
Voltage	380 V
Speed	18 / 6 RPM
Weight	230 kg
Standard accessories	One set 2½"–4" dies, one set 5"–6" dies, one 2½"–4" die head, one 5"–6" die head, 2 L threading oil, 4-leg stand

- Threads pipe from 2½" to 6"
- 1100 W motor
- Two-speed operation (18 / 6 RPM)
- Supplied with dies, two die heads, oil and 4-leg stand

FL-P20

PIPE THREADING

FL-P20 Portable Pipe Threader

½" – 2"

Portable 2" pipe threader, 2000 W, supplied in a carry case.

MODEL	FL-P20
Capacity	½" – 2"
Motor	2000 W
Voltage	220–240 V, 50 Hz
Speed	26 RPM
Weight	20 kg
Standard accessories	Die heads (½", ¾", 1", 1¼", 1½", 2"), oil gun, gloves, L key, screwdriver, fix holder, carbon brush, cleaning brush

- Threads pipe from ½" to 2"
- 2000 W motor
- Portable at 20 kg
- Supplied in a carry case with die heads

FL-P20



FL-P14

PIPE THREADING

FL-P14 Portable Pipe Threader

½" – 1¼"

FL-P14



Portable pipe threader, 1400 W, for pipe up to 1¼".

MODEL	FL-P14
Capacity	½" – 1¼"
Motor	1400 W
Voltage	220–240 V, 50 Hz
Speed	26 RPM
Weight	20 kg
Standard accessories	Die heads (½", ¾", 1½", 2"), oil gun, gloves, L key, screwdriver, fix holder, cleaning brush

- Threads pipe from ½" to 1¼"
- 1400 W motor
- Portable at 20 kg
- Supplied with die heads and tools

Super Threader-50AP

PIPE THREADING

Super Threader-50AP (1800 W) Pipe Threading Machine

½" – 2"

Pipe threading machine for ½"–2" pipe with a 1800 W universal motor and heavy-duty gearbox.

MODEL	Super Threader-50AP
HSN code	8459
Size	½" – 2"
Speed	40 RPM
Motor	1800 W
Gross weight	81 kg
Standard equipment	Die head ½"–2" (1 set); dies ½"–¾" (1 set, BSPT) and 1"–2" (1 set, BSPT)

- Threads pipe from ½" to 2"
- 1800 W universal motor with heavy-duty gearbox
- Ergonomic design for ease of handling
- Die head and BSPT dies supplied

Super Threader-50AP



FL-R65

PIPE THREADING

FL-R65 Pipe Threading Machine

½" – 2" – 2½"

FL-R65



Electric pipe threading machine, 1100 W, ½"–2½".

MODEL	FL-R65
Size	½" – 2" – 2½"
Power	1100 W
Voltage	220 V
Speed	28 RPM
Weight	70 / 80 kg
Packing size	65 × 41 × 52 cm
Accessories	Dies ½"–¾", 1"–2" and 2½"; 1 bottle of oil; screwdriver; 3 legs

- Threads pipe from ½" to 2½"
- 1100 W motor, 220 V
- Supplied with dies, oil, screwdriver and 3 legs

FL-R25

PIPE THREADING

FL-R25 Manual Ratchet Pipe Threader

Small portable manual ratchet pipe threader for ½"–1" pipe.

MODEL	FL-R25
Type	Manual ratchet pipe threader
Available sizes	½", ¾", 1"
Die head	½", ¾", 1" (BSPT / NPT)
Weight	Approx. 5 kg

- Compact and lightweight design
- Effortless operation in tight spaces
- Die heads ½", ¾" and 1" (BSPT / NPT)
- Supplied in a carry case

FL-R25



FL-R50

PIPE THREADING

FL-R50 Manual Ratchet Pipe Threader

FL-R50



Small portable manual ratchet pipe threader for ½"–2" pipe.

MODEL	FL-R50
Type	Manual ratchet pipe threader
Available sizes	½", ¾", 1", 1¼", 1½", 2"
Die head	½", ¾", 1", 1¼", 1½", 2" (BSPT / NPT)
Weight	Approx. 12 kg

- Compact and lightweight design
- Effortless operation in tight spaces
- Die heads ½", ¾", 1", 1¼", 1½" and 2" (BSPT / NPT)
- Supplied in a carry case

FL9A

ROLL GROOVING

FL9A Electric Hydraulic Roll Grooving Machine (1"–8")

1"–8"

Electric hydraulic roll grooving machine for 1"–8" steel pipe.

MODEL	FL9A
Fabrication capacity	1" – 8" (DN25–DN200, Ø33–Ø219) Sch.10/40 steel pipe
Max. wall thickness	8 mm
Output speed	23 RPM
Drive unit	800 W, 220 V, 50/60 Hz, single phase
Gross weight	98 kg
Packing size	73 × 40 × 77 cm
Standard accessories	Drive rollers 1"–1½", 2"–6", 8"; groove rollers 1"–1½", 2"–6", 8"; pipe stand for 1"–8"
Optional accessories	Foot switch

- Grooves 1"–8" Sch.10/40 steel pipe
- 800 W drive unit with hydraulic feeding pump
- Foot switch and pipe stand
- Drive and groove rollers for each size range

FL9A



FL9A1

ROLL GROOVING

FL9A1 Electric Hydraulic Roll Grooving Machine (1"–8")

1"–8"

FL9A1



Electric hydraulic roll grooving machine for 1"–8" steel pipe.

MODEL	FL9A1
Fabrication capacity	1" – 8" (DN25–DN200, Ø33–Ø219) Sch.10/40 steel pipe
Max. wall thickness	8 mm
Output speed	23 RPM
Motor power	750 W
Voltage	250 V
Frequency	50/60 Hz
Gross weight	98 kg
Packing size	73 × 40 × 77 cm
Standard accessories	Pipe support stand; knurling wheels 1"–1½", 2"–3", 3"–6", 8"; pinch rollers 1"–1½", 2"–6", 8"

FL12A

ROLL GROOVING

FL12A Electric Hydraulic Roll Grooving Machine (2"–12")

2"–12"

Electric hydraulic roll grooving machine for 2"–12" steel pipe.

MODEL	FL12A
Capacity	2"–6" for schedule 40; 8"–12" for schedule 10
Motor	1100 W
Voltage	220–240 V, 50 Hz
Speed	24 RPM
Standard accessories	Pipe support stand; upper rollers 2"–6", 8"–12"; knurling wheels 2"–3", 4"–6", 8"–12"

- Grooves 2"–12" steel pipe
- 1100 W motor
- Pipe support stand included
- Upper rollers and knurling wheels for each size range

FL12A



FL12A1

ROLL GROOVING

FL12A1 Electric Hydraulic Roll Grooving Machine (2"–12")

2"–12"

FL12A1



Electric hydraulic roll grooving machine for 2"–12" steel pipe.

MODEL	FL12A1
Size	2" – 12"
Power	1100 W
Voltage	220 V
Weight	115 / 125 kg
Packing size	81 × 41 × 80 cm
Accessories	Knurling roller 60–76 mm / 89–165 mm / 219–325 mm; pinch roller 60–76 mm / 89–165 mm / 219–325 mm

- Grooves 2"–12" steel pipe
- 1100 W motor
- Foot switch and pipe support stand
- Knurling and pinch rollers for each size range

FL12P

ROLL GROOVING

FL12P Premium Electric Hydraulic Roll Grooving Machine (1"–12")

1"–12"

Premium electric hydraulic roll grooving machine for 1"–12" steel pipe.

MODEL	FL12P
Fabrication capacity	1" – 8" (DN25–DN200, Ø33–Ø219) Sch.10/40 steel pipe; 10" – 12" (DN250–DN300, Ø254–Ø325) Sch.10/20 steel pipe
Max. wall thickness	8 mm
Output speed	23 RPM
Drive unit	1100 W, 220 V (110 V available), 50/60 Hz, single phase
Gross weight	118 kg
Packing size	75 × 40 × 70 cm
Standard accessories	Drive rollers 1"–1½", 2"–3", 3½"–6", 8"–12"; groove rollers 1"–1½", 2"–6", 8"–12"; pipe stand for 1"–12"; foot switch

- Grooves 1"–12" steel pipe
- 1100 W drive unit with hydraulic feeding pump
- Groove depth lock for consistent grooves
- Pipe stand and foot switch supplied

FL12P



FL-24

ROLL GROOVING

FL-24 Roll Grooving Machine (8"–24")

8"–24"

FL-24

Roll grooving machine for 8"–24" Sch.40 steel pipe.

MODEL	FL-24
Capacity	8" – 24" (Ø219 – Ø630) SCH40 pipe
Max. wall thickness	13 mm
Voltage	380V–415V, 50Hz
Speed	15 RPM
G.W.	340 kg
Standard accessories	Hydraulic pipe support stand; knurl wheel Ø219–Ø325, Ø377–Ø426 and Ø480–Ø630 (one pc each); pinch roller Ø219–Ø530 and Ø630 (one pc each); groove measuring tape (one pc)
Packaging size	102 × 75 × 147 cm



- Grooves 8"–24" (Ø219–Ø630) SCH40 pipe
- Up to 13 mm wall thickness
- Hydraulic pipe support stand included
- 380–415 V supply

PIPE CUTTING MACHINE

Clean, accurate pipe cutting machines for demanding fabrication work.

CHM1

PIPE CUTTING

CHM1 Pipe Cutting Machine (2"–8")

2"–8"

Pipe cutting machine for 2" – 8" pipe, 750 W.

MODEL	CHM1
Capacity	2"–8"
Max. wall thickness	10 mm
Speed	23 RPM
Motor	750 W, 220 V, 50 Hz, single phase

- Cuts 2" – 8" pipe
- 750 W single-phase motor
- Up to 10 mm wall thickness
- 23 RPM cutting speed

CHM1



CHM2

PIPE CUTTING

CHM2 Pipe Cutting Machine (2"–12")

2"–12"

CHM2



Pipe cutting machine for 2" – 12" pipe, 1100 W.

MODEL	CHM2
Capacity	2"–12"
Max. wall thickness	10 mm
Speed	23 RPM
Motor	1100 W, 220 V, 50 Hz, single phase

- Cuts 2" – 12" pipe
- 1100 W single-phase motor
- Up to 10 mm wall thickness
- 23 RPM cutting speed

FL-J40/250

PIPE CUTTING

FL-J40/250 Pipe Cutting Machine (40–250 mm)

40–250mm

Pipe cutting machine for 40–250 mm HDPE/PPR pipes.

MODEL	FL-J40/250
Cutting range	40 – 250 mm
Application	Cutting HDPE / PPR pipes

- Cuts pipe from 40 mm to 250 mm
- For HDPE / PPR pipes

FL-J40/250



FL-J160/400

PIPE CUTTING

FL-J160/400 Electric Pipe Cutting Machine (160–400 mm)

160–400mm

FL-J160/400



Electric pipe cutting machine for 160–400 mm HDPE/PPR pipes, 1800 W.

MODEL	FL-J160/400
Cutting range	160 – 400 mm
Power	1800 W
Application	Cutting HDPE / PPR pipes

- Cuts pipe from 160 mm to 400 mm
- 1800 W electric drive
- For HDPE / PPR pipes

FL-114A

HOLE SAW CUTTING

FL-114A Hole Saw Cutting Machine

Portable hole cutting machine, 1500 W, up to 114 mm.

MODEL	FL-114A
Power input	1500 W
Voltage	230 V, 50 Hz
Max. wall thickness	10 mm
Max. cutting capacity	114 mm
Pipe mounting capacity	30 mm – 220 mm
Drill chuck capacity	3 mm – 16 mm
Overall dimensions (L × W × H)	26 × 24.8 × 51.3 cm
Net weight	16 kg

- Cuts openings up to 114 mm
- 1500 W power input
- Mounts on pipe from 30 to 220 mm
- Drill chuck 3–16 mm

FL-114A



FL-150A

HOLE SAW CUTTING

FL-150A Hole Saw Cutting Machine

FL-150A



Portable hole cutting machine, 1500 W, up to 152 mm.

MODEL	FL-150A
Power input	1500 W
Voltage	230 V, 50 Hz
Speed	110 RPM
Max. wall thickness	10 mm
Max. cutting capacity	152 mm
Pipe mounting capacity	42 mm – 323 mm
Drill chuck capacity	3 mm – 16 mm
Overall dimensions (L × W × H)	40 × 30 × 35 cm
Net weight	20 kg

K-114

HOLE SAW CUTTING

K-114 Hole Saw Cutting Machine

25 mm – 114 mm

Portable hole cutting machine with chain mounting for pipe.

MODEL	K-114
No-load speed	120 RPM
Power	650 W
Voltage	220 V
Frequency	50–60 Hz
Cutting size	25 mm – 114 mm

- Cuts openings from 25 mm to 114 mm
- 650 W motor, 120 RPM no-load speed
- Chain mounting for pipe

K-114



HOLE SAW CUTTING

Bi-Metal Hole Saw Cutters



Bi-metal hole saw cutters in a range of sizes.

Type	Hole saw cutters (Bi-Metal)
Sizes	Available on request

- Bi-metal construction
- Range of sizes available

HOLE SAW CUTTING

TCT Hole Saw Cutters

TCT (tungsten carbide tipped) hole saw cutters.

Type	TCT hole saw cutters
Sizes	Available on request

- Tungsten carbide tipped (TCT) teeth
- Supplied with pilot drill and key



ZD-40

PRESSURE TEST PUMPS

ZD-40 Manual Pressure Test Pump

Hand-operated pressure test pump, 0–50 bar.

MODEL	ZD-40
Working pressure	0–50 bar
Piston volume	30 ml/time
Hose length	100 cm
Weight	4 kg
Dimensions (L × W × H)	36 × 18 × 27 cm

- Working pressure 0–50 bar
- Piston volume 30 ml per stroke
- 100 cm hose
- Compact and portable, only 4 kg

ZD-40



TP-50

PRESSURE TEST PUMPS

TP-50 Manual Pressure Test Pump

TP-50



Hand-operated pressure test pump, 0–50 bar.

MODEL	TP-50
Working pressure	0–50 bar
Piston volume	40 ml/time
Hose length	150 cm
Weight	8.5 kg
Dimensions (L × W × H)	51 × 19 × 29 cm

- Working pressure 0–50 bar
- Piston volume 40 ml per stroke
- 150 cm hose
- Built-in water tank

FL-40A

PRESSURE TEST PUMPS

FL-40A Electric Pressure Test Pump

Electric pressure test pump, up to 40 bar, 30 L/min.

MODEL	FL-40A
No. of cylinders	3
Max pressure	40 bar
Flow rate	30 L/min
Motor	Crompton copper 2 HP
RPM	3600
Oil required	1 ltr
Gross weight	20 kg

- Test up to 40 bar
- High flow rate: 30 L/min
- Powerful Crompton copper 2 HP motor
- Durable and reliable, built for long life and heavy-duty usage

FL-40A



FL-160M4

BUTT JOINTING

FL-160M4 HDPE Butt Fusion Machine

63–160 mm

Manual butt welding machine, 63–160 mm.

MODEL	FL-160M4
Welding range (mm)	63, 75, 90, 110, 125, 140, 160
Power	1.7 kW
Voltage	220 V
Working temp.	270°C ± 10%
Dimensions	65 × 44 × 49 cm
Weight	40 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-160M4



FL-200M4

BUTT JOINTING

FL-200M4 HDPE Butt Fusion Machine

63–200 mm

FL-200M4



Manual butt welding machine, 63–200 mm.

MODEL	FL-200M4
Welding range (mm)	63, 75, 90, 110, 125, 140, 160, 180, 200
Power	2.31 kW
Voltage	220 V
Working temp.	270°C ± 10%
Dimensions	65 × 44 × 49 cm
Weight	45 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-250M4

BUTT JOINTING
FL-250M4 HDPE Butt Fusion Machine


90–250 mm

Manual butt welding machine, 90–250 mm.

MODEL	FL-250M4
Welding range (mm)	90, 110, 125, 140, 160, 180, 200, 225, 250
Power	3.15 kW
Voltage	220 V
Working temp.	270°C ± 10%
Dimensions	75 × 60 × 61 cm
Weight	80 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-250M4

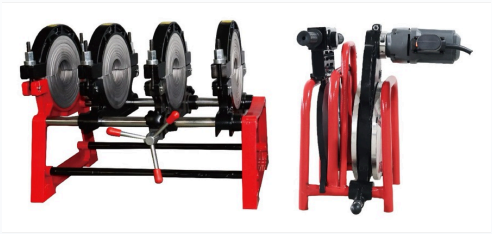

FL-315H4

BUTT JOINTING
FL-315H4 HDPE Butt Fusion Machine

63–315 mm

FL-315H4



Hydraulic butt fusion welding machine, 63–315 mm.

MODEL	FL-315H4
Welding range (mm)	63, 75, 90, 110, 140, 160, 180, 200, 225, 250, 280, 315
Power	5.35 kW
Voltage	220 V
Working temp.	270°C ± 10%
Dimensions	100 × 72 × 68 cm / 68 × 54 × 56 cm
Weight	200 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-355H4

BUTT JOINTING
FL-355H4 HDPE Butt Fusion Machine

160–355 mm

Hydraulic butt fusion welding machine, 160–355 mm.

MODEL	FL-355H4
Welding range (mm)	160, 180, 200, 225, 250, 280, 315, 355
Power	5.45 kW
Voltage	220 V
Working temp.	270°C ± 10%
Dimensions	100 × 72 × 73 cm / 75 × 64 × 62 cm
Weight	230 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available



FL-450H4

BUTT JOINTING
FL-450H4 HDPE Butt Fusion Machine

280–450 mm



Hydraulic butt fusion welding machine, 280–450 mm.

MODEL	FL-450H4
Welding range (mm)	280, 315, 355, 400, 450
Power	7.2 kW
Voltage	380 V
Working temp.	270°C ± 10%
Packing size	110 × 93 × 87 cm / 115 × 85 × 67 cm / 65 × 52 × 50 cm
Weight	370 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-630H4

BUTT JOINTING

FL-630H4 HDPE Butt Fusion Machine

400–630 mm

Hydraulic butt fusion welding machine, 400–630 mm.

MODEL	FL-630H4
Welding range (mm)	400, 450, 500, 560, 630
Power	10.6 kW
Voltage	380 V
Working temp.	270°C ± 10%
Packing size	140 × 105 × 107 cm / 125 × 110 × 83 cm / 65 × 52 × 50 cm
Weight	600 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-630H4



FL-800H4

BUTT JOINTING

FL-800H4 HDPE Butt Fusion Machine

630–800 mm

FL-800H4



Hydraulic butt fusion welding machine, 630–800 mm.

MODEL	FL-800H4
Welding range (mm)	630, 710, 800
Power	18.2 kW
Voltage	380 V
Working temp.	270°C ± 10%
Packing size	215 × 135 × 125 cm / 122 × 92 × 182 cm / 75 × 54 × 50 cm
Weight	1200 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-1000H4

BUTT JOINTING

FL-1000H4 HDPE Butt Fusion Machine

800–1000 mm

Hydraulic butt fusion welding machine, 800–1000 mm.

MODEL	FL-1000H4
Welding range (mm)	800, 900, 1000
Power	24 kW
Voltage	380 V
Working temp.	270°C ± 10%
Packing size	215 × 150 × 104 cm / 265 × 165 × 153 cm / 84 × 58 × 52 cm
Weight	2100 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-1000H4



FL-1200H4

BUTT JOINTING

FL-1200H4 HDPE Butt Fusion Machine

1000–1200 mm

FL-1200H4



Hydraulic butt fusion welding machine, 1000–1200 mm.

MODEL	FL-1200H4
Welding range (mm)	1000, 1200
Power	30.5 kW
Voltage	380 V
Working temp.	270°C ± 10%
Packing size	252 × 195 × 200 cm / 175 × 129 × 224 cm / 92.5 × 82 × 105 cm
Weight	3370 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

63B-2

BUTT JOINTING
63B-2 Socket Welding Machine

Socket fusion welding machine supplied in a metal carry case.

MODEL	63B-2
Other specifications	Available on request

- Accurate pipe alignment
- Uniform, repeatable joint quality
- Sturdy construction
- Technical support available

63B-2



110A

BUTT JOINTING
110A Socket Welding Machine

110A



Socket fusion welding machine supplied in a metal carry case.

MODEL	110A
Other specifications	Available on request

- Accurate pipe alignment
- Uniform, repeatable joint quality
- Sturdy construction
- Technical support available

HB-50

PIPE BENDING

HB-50 Hydraulic Pipe Bender

Φ21.3 – Φ60

Hydraulic pipe bender for ½"–2" pipe, supplied with six bending dies.

MODEL	HB-50
Bending range	Φ21.3 – Φ60
Standard configuration	6 pairs of molds
Sizes (mm)	22, 28, 34, 42, 48, 60
Maximum working pressure	45 MPa
Maximum working stroke	250 mm
Bending angle	90° ≤ a < 180°
Oil tank capacity (15# hydraulic oil)	1.2 kg
Stroke	250 mm
Gross weight	50 kg
Wall thickness	2.75 – 4.5 mm
Packing dimensions (cm)	73 × 32 × 16.5
Die ½"	A 115 mm · B 67.5 mm · min. bend radius 50.2 mm · D 22 mm · Sch.40 / Sch.80 wall 2.8 / 3.7 mm
Die ¾"	A 131 mm · B 84.5 mm · min. bend radius 66 mm · D 28 mm · Sch.40 / Sch.80 wall 2.9 / 3.9 mm
Die 1"	A 147 mm · B 96.5 mm · min. bend radius 75.4 mm · D 34 mm · Sch.40 / Sch.80 wall 3.4 / 4.5 mm
Die 1¼"	A 197 mm · B 134 mm · min. bend radius 108.7 mm · D 43 mm · Sch.40 wall 3.6 mm
Die 1½"	A 242 mm · B 162 mm · min. bend radius 133.5 mm · D 50 mm · Sch.40 wall 3.7 mm
Die 2"	A 297 mm · B 238 mm · min. bend radius 199.2 mm · D 62 mm · Sch.40 wall 3.9 mm

HB-50



PIPE BENDING

Portable Conduit Pipe Bender



Portable bender for 20–32 mm conduit pipe.

Type	Portable conduit pipe bender
Capacity	20 – 32 mm dia conduit pipe
Weight	32 kg

- Bends 20–32 mm conduit pipe
- Portable

HB-80

PIPE BENDING

HB-80 (1/2"-3") Hydraulic Pipe Bender

Φ21.3 – Φ89

Hydraulic pipe bender for 1/2"–3" pipe, supplied with a set of bending dies.

MODEL	HB-80
Bending range	Φ21.3 – Φ89
Standard configuration	8 pairs of molds
Sizes (mm)	22, 28, 34, 42, 48, 60, 75.5, 89
Maximum working pressure	50 MPa
Maximum working stroke	320 mm
Bending angle	90° ≤ a < 180°
Oil tank capacity (15# hydraulic oil)	2.5 kg
Stroke	320 mm
Gross weight	97 kg
Wall thickness	2.75 – 4.5 mm
Packing dimensions (cm)	93 × 39 × 21

HB-80



HB-100

PIPE BENDING

HB-100 (1/2"-4") Hydraulic Pipe Bender

Φ21.3 – Φ108

HB-100

Hydraulic pipe bender for 1/2"–4" pipe, supplied with a set of bending dies.

MODEL	HB-100
Bending range	Φ21.3 – Φ108
Standard configuration	9 pairs of molds
Sizes (mm)	22, 28, 34, 42, 48, 60, 75.5, 89, 108
Maximum working pressure	63 MPa
Maximum working stroke	415 mm
Bending angle	90° ≤ a < 180°
Oil tank capacity (15# hydraulic oil)	4 kg
Stroke	380 mm
Gross weight	135 kg
Wall thickness	2.75 – 6 mm
Packing dimensions (cm)	119 × 41 × 22.5



EHB-50

PIPE BENDING

EHB-50 Electric Pipe Bender

Φ21.3 – Φ60

Electric hydraulic pipe bender with a set of bending dies.

MODEL	EHB-50
Motor	750 W
Bending range	Φ21.3 – Φ60
Standard configuration	6 pairs of molds
Sizes (mm)	22, 28, 34, 42, 48, 60
Maximum working pressure	45 MPa
Maximum working stroke	250 mm
Bending angle	90° ≤ a < 180°
Oil tank capacity (15# hydraulic oil)	1.2 kg
Stroke	250 mm
Gross weight	50 kg
Wall thickness	2.75 – 4.5 mm
Packing dimensions (cm)	73 × 32 × 16.5
Die ½"	A 115 mm · B 67.5 mm · min. bend radius 50.2 mm · D 22 mm · Sch.40 / Sch.80 wall 2.8 / 3.7 mm
Die ¾"	A 131 mm · B 84.5 mm · min. bend radius 66 mm · D 28 mm · Sch.40 / Sch.80 wall 2.9 / 3.9 mm
Die 1"	A 147 mm · B 96.5 mm · min. bend radius 75.4 mm · D 34 mm · Sch.40 / Sch.80 wall 3.4 / 4.5 mm
Die 1¼"	A 197 mm · B 134 mm · min. bend radius 108.7 mm · D 43 mm · Sch.40 wall 3.6 mm
Die 1½"	A 242 mm · B 162 mm · min. bend radius 133.5 mm · D 50 mm · Sch.40 wall 3.7 mm
Die 2"	A 297 mm · B 238 mm · min. bend radius 199.2 mm · D 62 mm · Sch.40 wall 3.9 mm

EHB-50



SPARE PARTS

Pipe threading oil and other consumables for your machines.



Pipe Threading Oil

Premium quality threading oil, available in 5 Ltr, 10 Ltr and 20 Ltr packing sizes.



Threading Dies Set

Dies set for all types of threading machines and pipes, in SS and alloy material.



Curve Plate



Cutting Wheel



Oil Pump Assembly



Index



Pellet



On Off Switch



Jaw Insert



Front Chuck Jaw



Filter



Screw Plate



Auto Cut Die Head Assembly



Lever type Die Head Assembly



Remmer



Hammer Chuck Body



Motor With Gear Assembly



Shaft Bracket



Cutting Handle



Main Drive Shaft



Fork Chuck Assembly



Length Change Assembly



Rear Hammer Chuck Body



Clutch Plate



Capacitor



Lock Assembly



Export Shaft Gear



Hand Wheel Gear



Oil Pipe

FLEET

BUILDING THE FUTURE TOGETHER

THANK YOU

We would be happy to help you choose the right machine

FL150A



FL9A



FL-J40/250



FL-150A



FL-40A



EHB-50



CORPORATE OFFICE / WAREHOUSE

GF KH. NO. 91/3/2, Phirni Road, Bijwasan, New Delhi – 110061

BANGALORE OFFICE / WAREHOUSE

No 11, 2nd Cross, Dayanandanagar, Srirampura, Bangalore – 560021, Karnataka

PHONE / WHATSAPP

+91 83830 36046 · +91 89015 84802

EMAIL

Sales: sales@fleetindustries.co.in

General enquiries: info@fleetindustries.co.in

Specifications are subject to change. Please contact us to confirm details for your requirement.