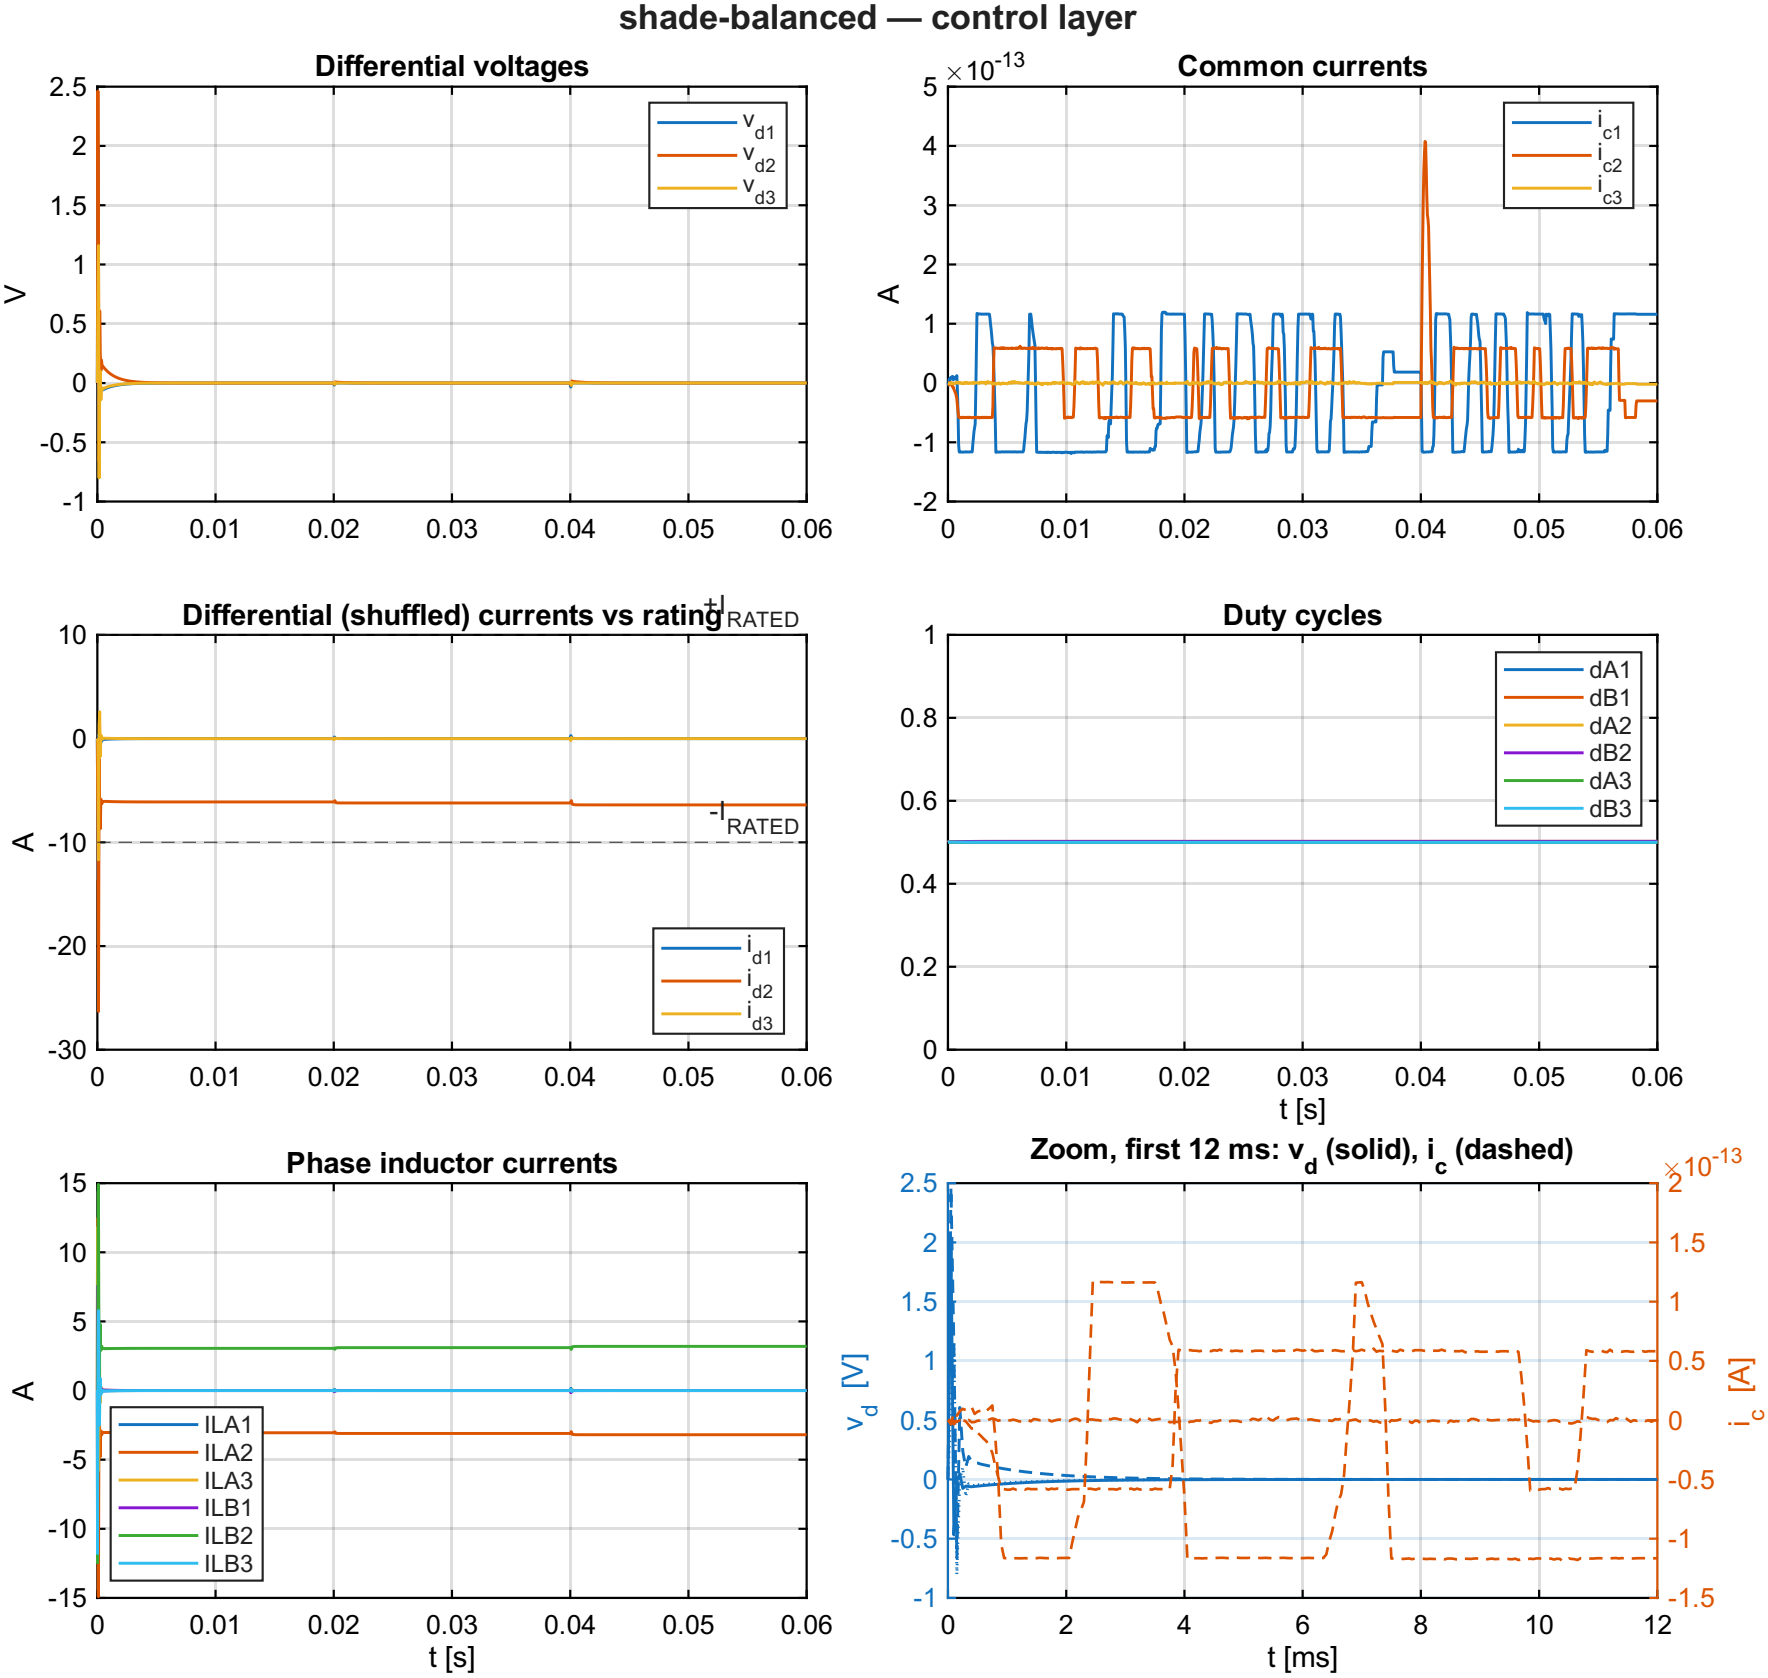

shade-balanced — control layer
Differential voltages
V
v_d1
v_d2
v_d3
Common currents
×10^-13
A
i_c1
i_c2
i_c3
Differential (shuffled) currents vs rating
±I_RATED
-I_RATED
A
i_d1
i_d2
i_d3
Duty cycles
dA1
dB1
dA2
dB2
dA3
dB3
t [s]
Phase inductor currents
A
ILA1
ILA2
ILA3
ILB1
ILB2
ILB3
t [s]
Zoom, first 12 ms: v_d (solid), i_c (dashed)
v_d [V]
×10^-13
i_c [A]
t [ms]