MIL validate suite (4 modules): shade-balanced — last module 500 W/m², refs [0, 0, 0], track, PASS; cold start, kscale 1

Voltage differences v_d (full run); dotted = reference

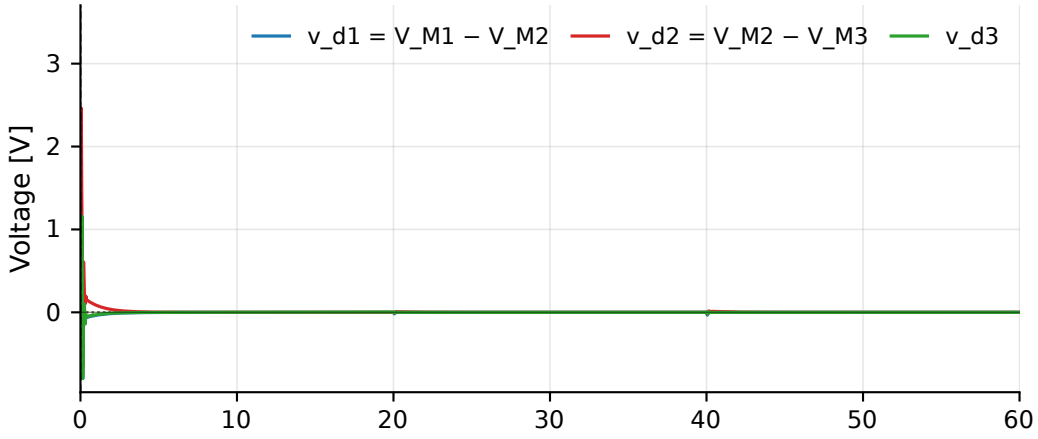

Voltage differences v_d (zoom); dotted = reference

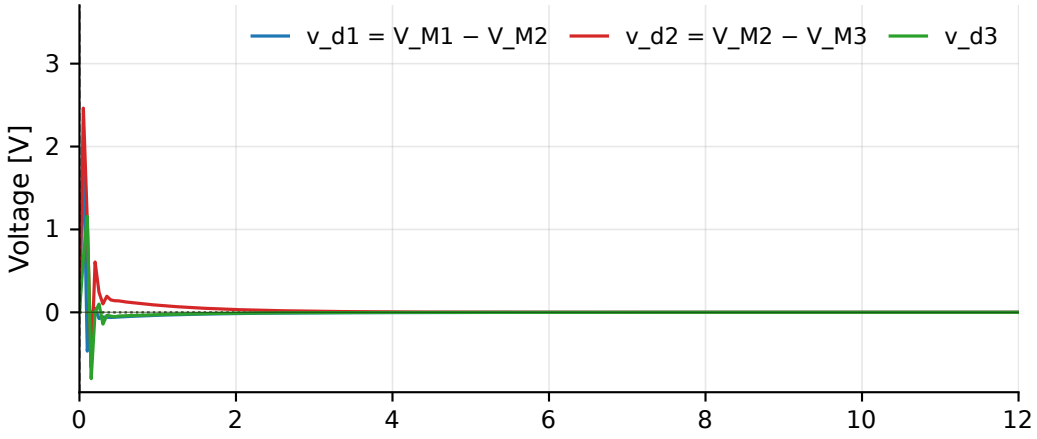

Shuffled i_sh (solid) and circulating i_c (dashed) (full run)

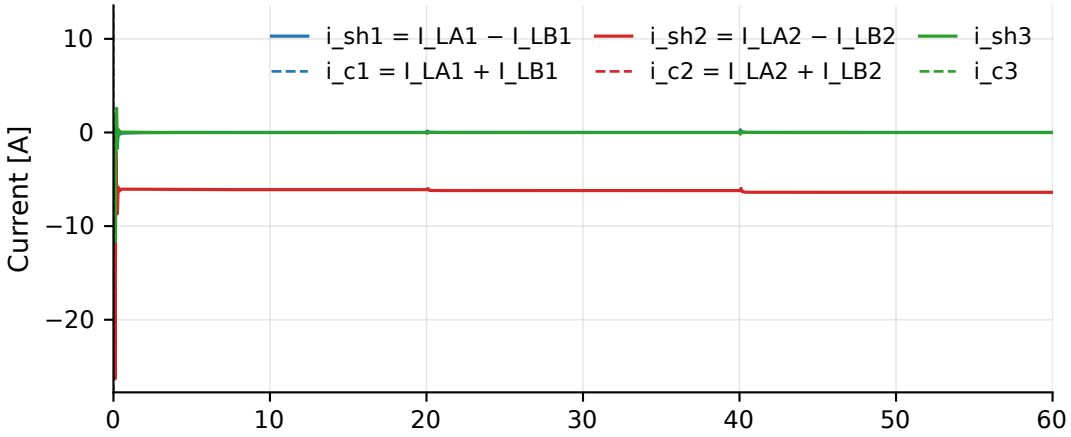

Shuffled i_sh (solid) and circulating i_c (dashed) (zoom)

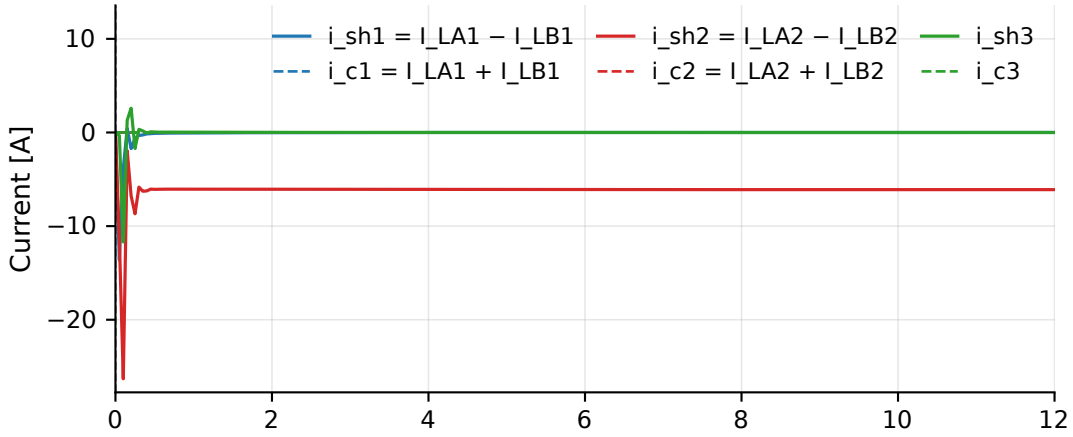

Duty cycles (full run)

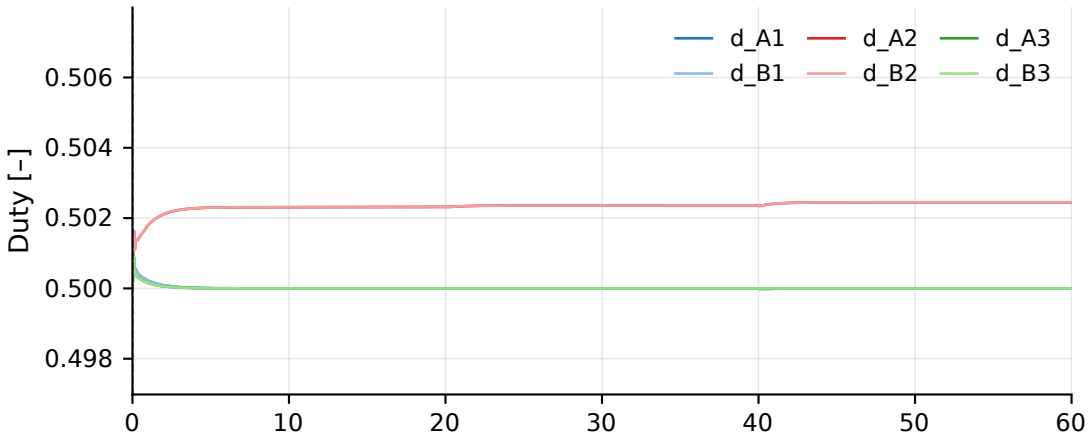

Duty cycles (zoom)

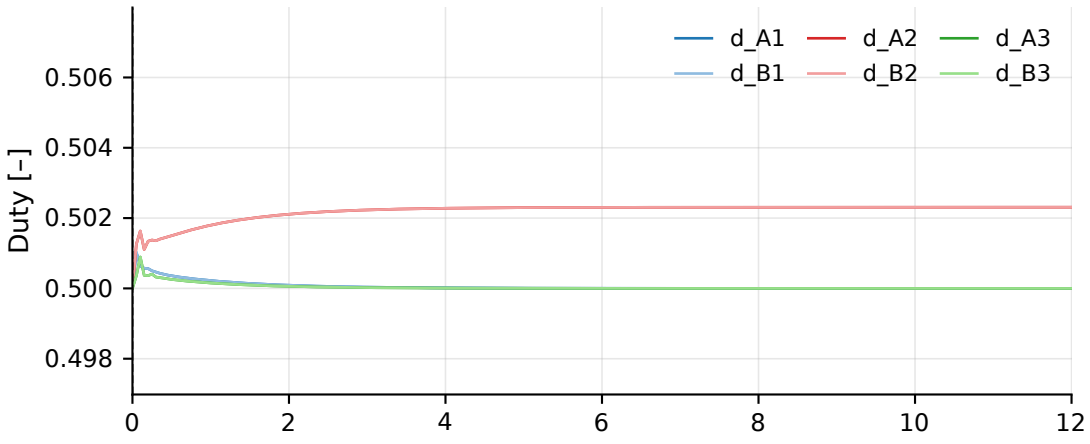

Module voltages and string power (full run)

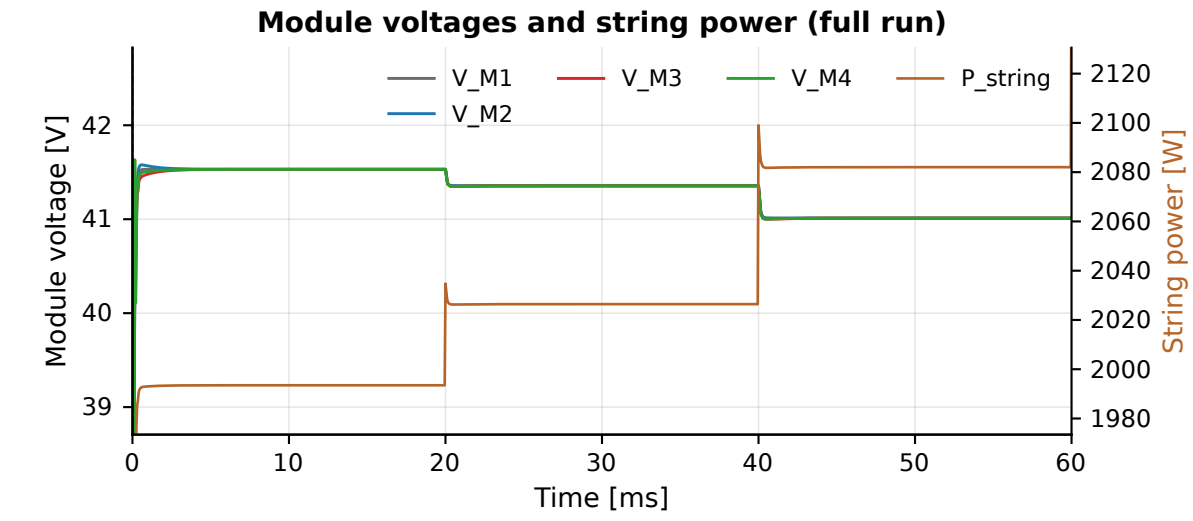
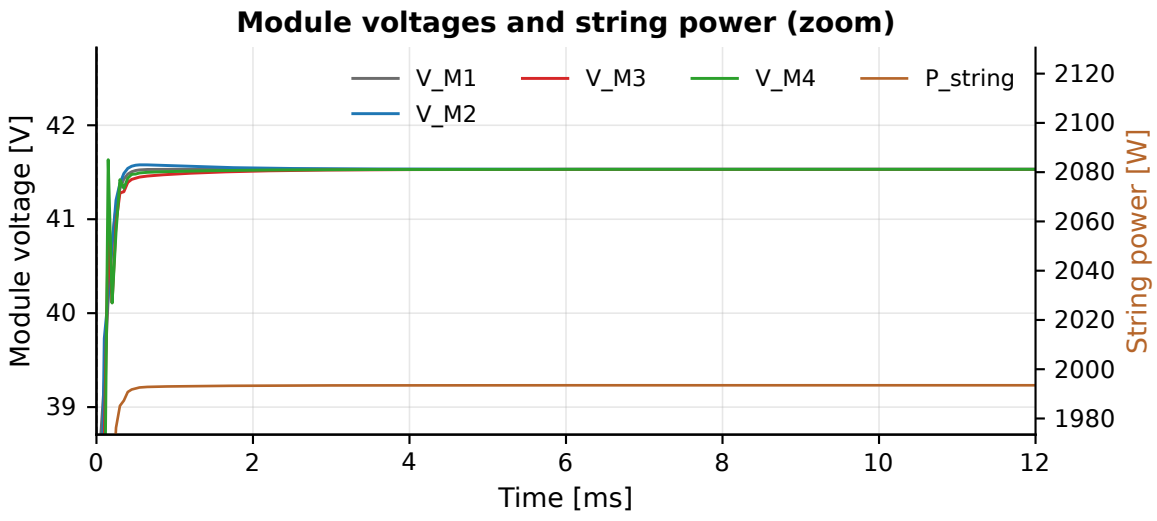
Module voltages and string power (zoom)