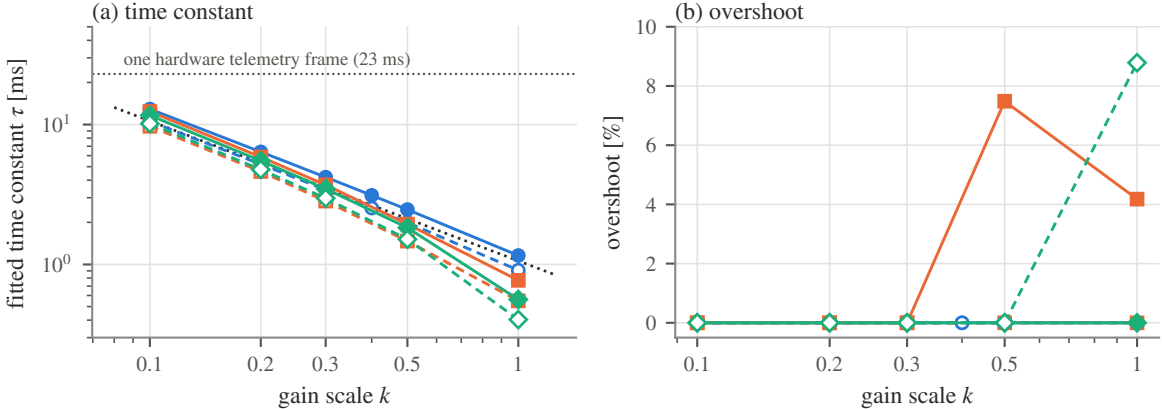
(a) time constant
one hardware telemetry frame (23 ms)
fitted time constant τ [ms]
10^1
10^0
0.1
0.2
0.3
0.5
1
gain scale k
(b) overshoot
overshoot [%]
10
8
6
4
2
0
0.1
0.2
0.3
0.5
1
gain scale k
Analytical (N = 3 model)
QSPICE + firmware DLL
Simulink carpark twin
solar plant (PV80)
bench plant
design 1/(k 2π 150)