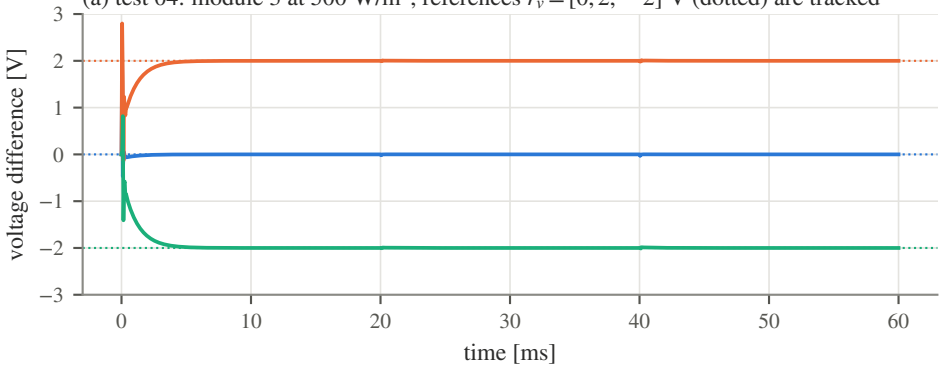
(a) test 04: module 3 at 500 W/m^2, references $r_v = [0, 2, -2]$ V (dotted) are tracked
voltage difference [V]
time [ms]
$v_{d,1}$
$v_{d,2}$
$v_{d,3}$

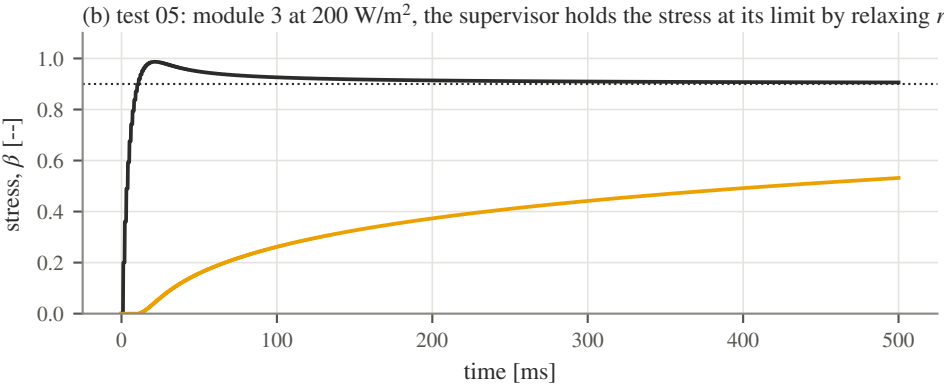
(b) test 05: module 3 at 200 W/m^2, the supervisor holds the stress at its limit by relaxing r_v
stress, β [--]
time [ms]
stress index
governor gain β
$S_{hi} = 0.9$