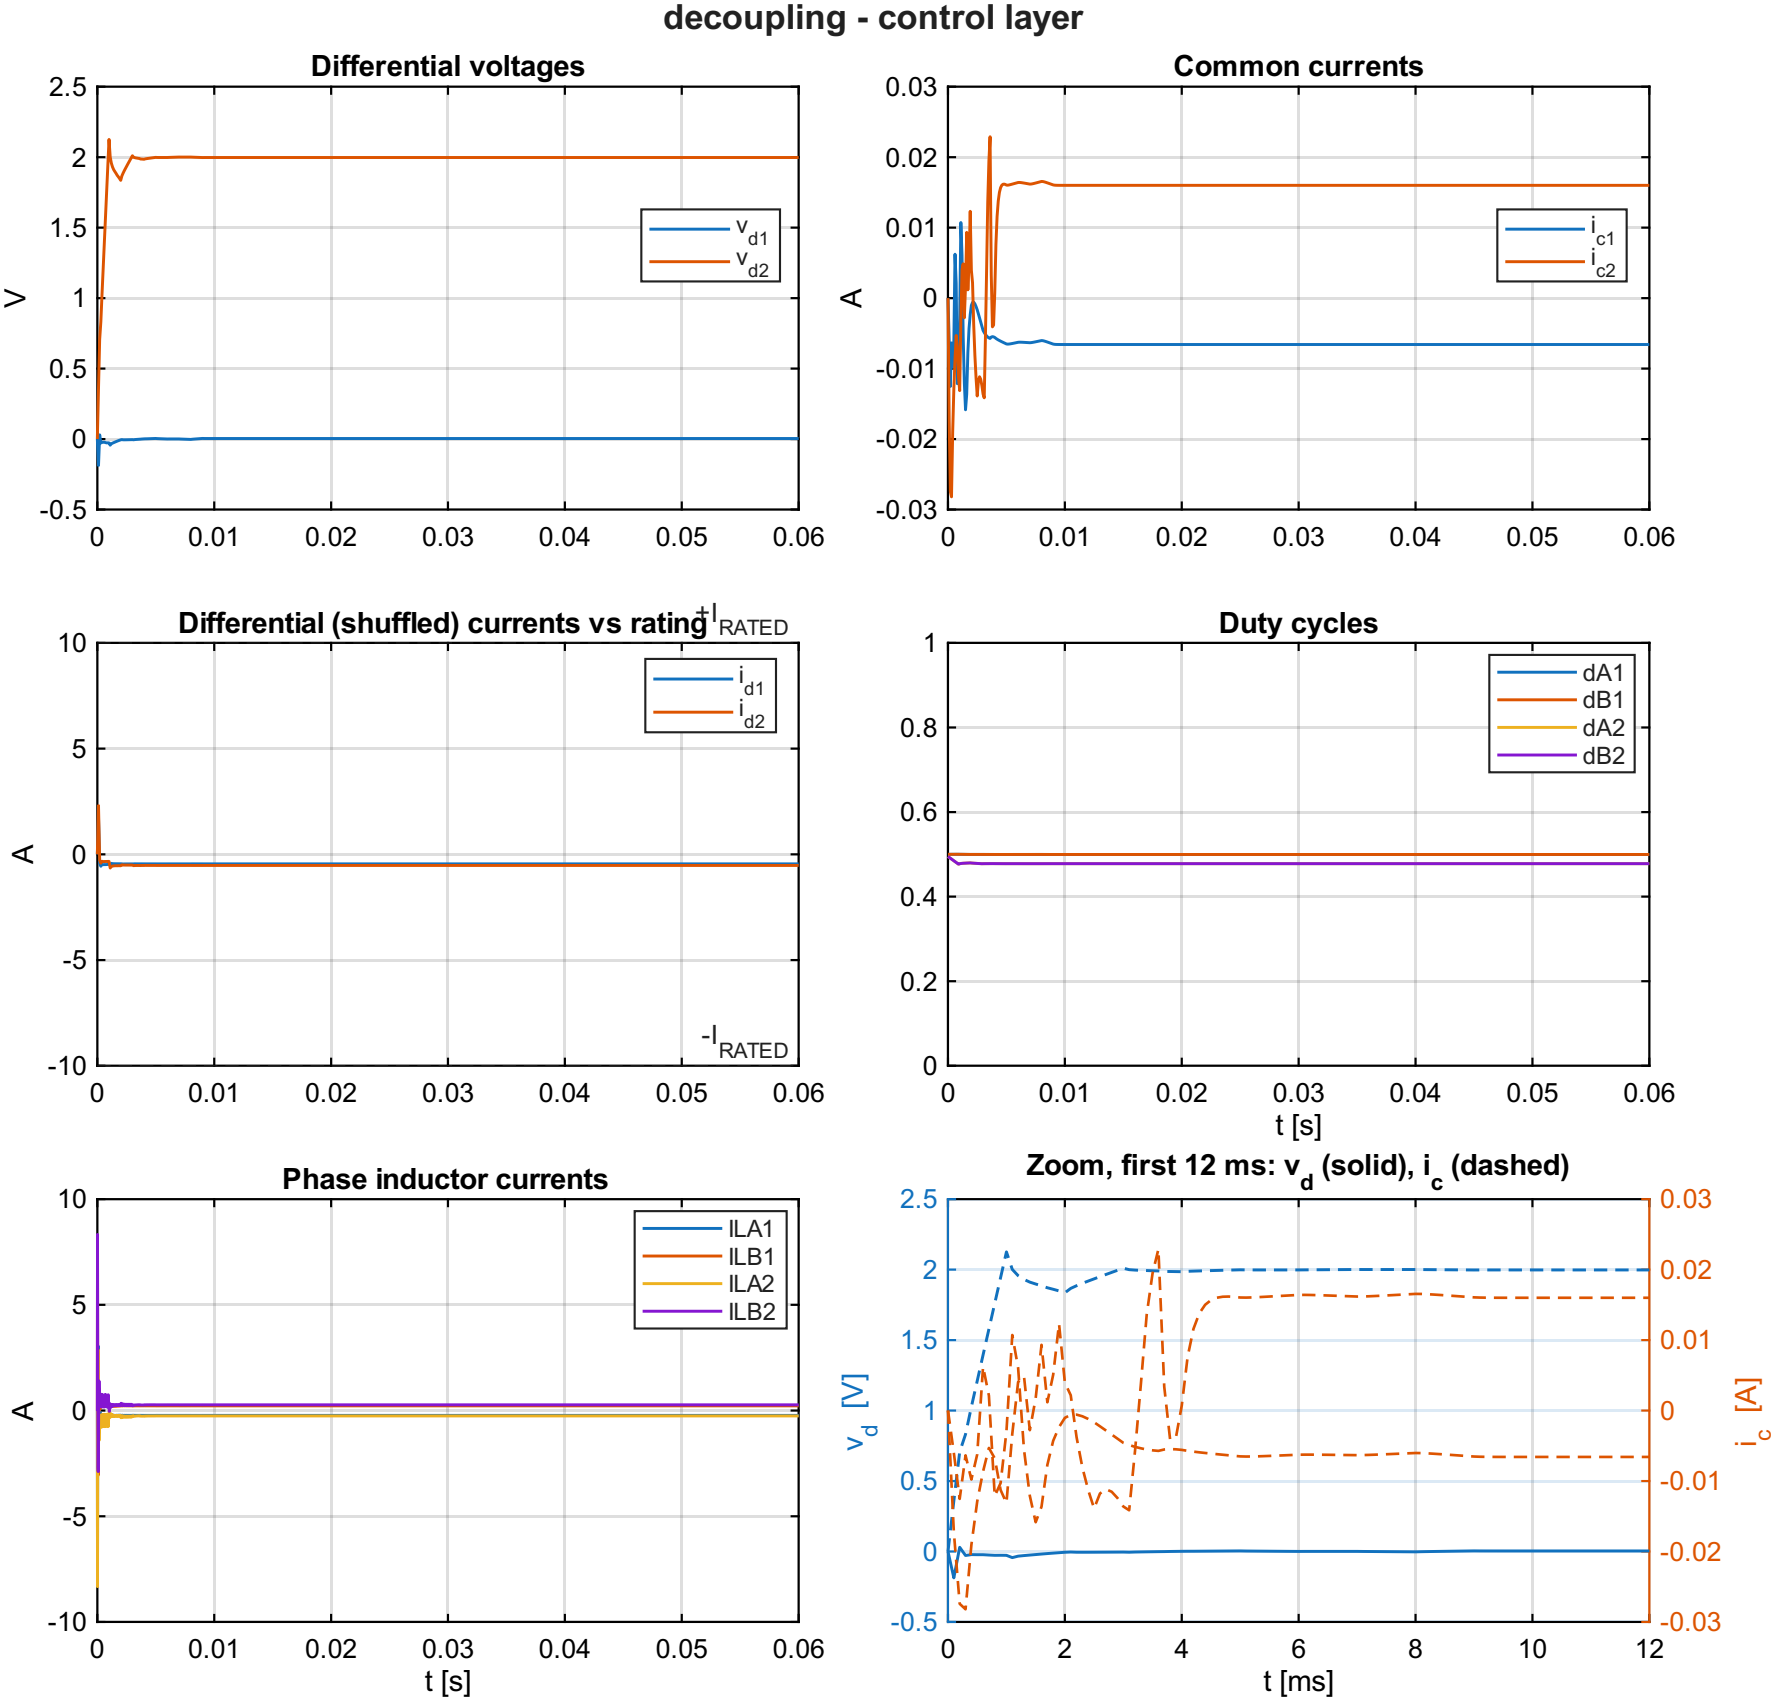

decoupling - control layer
Differential voltages
V
v_d1
v_d2
Common currents
A
i_c1
i_c2
Differential (shuffled) currents vs rating ±I_RATED
A
i_d1
i_d2
-I_RATED
Duty cycles
dA1
dB1
dA2
dB2
t [s]
Phase inductor currents
A
ILA1
ILB1
ILA2
ILB2
t [s]
Zoom, first 12 ms: v_d (solid), i_c (dashed)
v_d [V]
i_c [A]
t [ms]