SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

中文 | English

Home   **About Us**   **Products**   **Service&Support**   **demo**   **Contact Us**

Search
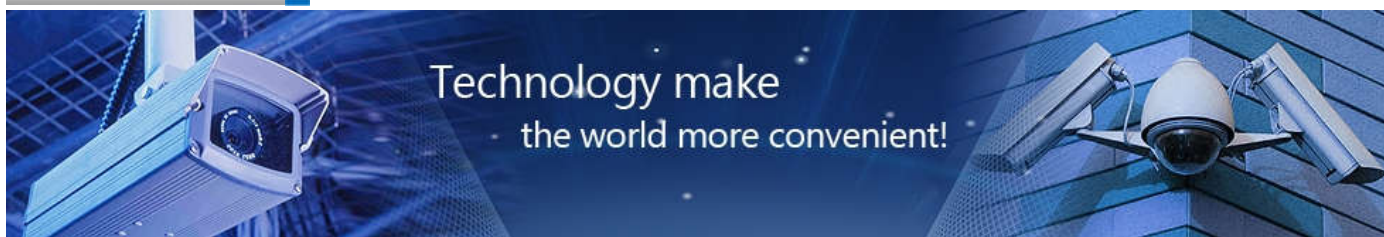
Products

▼ DVR NVR HVR KITS

▼ AHD series

     Hybrid AHD DVR

     AHD camera

▼ CVI series

     CVI camera

▼ Professional IP Camera

     3.0~5.0MP IP camera

     1080P IP Camera

     960P IP Camera

     720P IP Camera

     IP Speed Dome

     IPC Module

▼ Household IP Camera

▼ Network Video Recorder(NVR)

▼ Analog Camera

     Weatherproof IR Camera

     Vandal proof Dome Camera

     Plastic Dome Camera

     PTZ Camera

     Specialty Camera

▼ Digital Video Recorder(DVR)

     24&32 Channels

▼ Peripheral

     POE Switch

     UTP Video Balun

     Power supply

     Cable&Connector

     Tools

AHD8616WF

3 in 1 AHD DVR

IPC,Analog, AHD input

16*960H/16*1080P/4*5MP

support P2P cloud

HDMI FHD output

Support 8HDD.

Print

Specification

Model	AHD8616WF
Support embedded Linux OS Support BNC and IPC Sync Input Support VGA ,HDMI video output VGA,HDMI image resolution Max to 1920*1080 Support HD preview, all channels support Main stream Support Zoom function of preview and playback Support event,playback,backup recording ,support picture playback and search Support One-key recording Support fast playback Support P2P Support 16ch 960H/16ch 1080P /4ch 5MP simultaneous playback	
System	
Main processor	High performance embedded microprocessor
Operating system	Embedded LINUX OS
Video spec.	
Video compression format	H.264
Display Image Resolution	1.AHD: 16CH*720P(compatible with 960H analog) 2.AHD+IP: 16CH*720P+4CH*1080P; 3.AHD+IP: 8CH*720P+8CH*1080P; 4.Analog+IP: 16CH*960H+16CH*720P 5.IP: 16CH*1080P; 6.IP: 9CH*3MP; 7.IP: 4CH*5MP
Playback Image Resolution	960H/5MP 30FPS
Motion Detection	can setup 192(16×12)pcs motion detection area each channeland multi-level sensitivity(1-6 levels adjustable)
Privacy Masking	Support
Audio spec.	
Audio compression format	adpcm, G711
Two-way audio	N/A
Recording Mode	
Recording Mode	Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording
Recording storage	HDD,Network
Frame rate	30 fps NTSC;25fps PAL
Playback	Max support 4ch 5MP synchronously playback
Backup Mode	Support HDD,USB Flash Disk store & backup
Video	
Video Input	16CH BNC, RJ45

Video output	1ch VGA and 1ch HDMI
Audio	
Audio Input	16ch BNC
Audio Output	1ch
Alarm	
Alarm Input	16ch
Alarm Output	2ch
Other	
Network	1x100Mbps,RJ45 port;
RS485	Standard 485 port,support half-duplex, green terminal port
USB	2 USB 2.0 ports
HDD	support 4 SATA HDD MAX4T
Power	AC 110~230V
Power consumption	16W-18W(not include HDD)
Operation temperature	0°C－＋55°C
Operation humidity	10%－90%
Demension	440MM*445MM*90mm（2U height）
Weight	8.7 KG(not include HDD)