


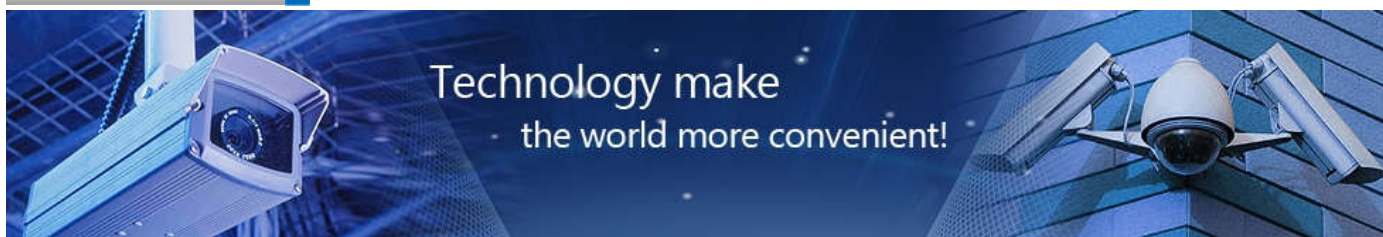

SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

[中文](#) | [English](#)
 Search

[Home](#)
[About Us](#)
[Products](#)
[Service&Support](#)
[demo](#)
[Contact Us](#)


Products

- ▼ DVR NVR HVR KITS
- ▼ AHD series
 - Hybrid AHD DVR
 - AHD camera
- ▼ CVI series
 - CVI camera
- ▼ Professional IP Camera
 - 3.0~5.0MP IP camera
 - 1080P IP Camera
 - 960P IP Camera
 - 720P IP Camera
 - IP Speed Dome
 - IPC Module
- ▼ Household IP Camera
- ▼ Network Video Recorder(NVR)
- ▼ Analog Camera
 - Weatherproof IR Camera
 - Vandal proof Dome Camera
 - Plastic Dome Camera
 - PTZ Camera
 - Specialty Camera
- ▼ Digital Video Recorder(DVR)
 - 24&32 Channels
- ▼ Peripheral
 - POE Switch
 - UTP Video Balun
 - Power supply
 - Cable&Connector
 - Tools



Specification

NVK704

4channel NVR kits
 7inch LCD 800*480
 NVR support onvif
 1080P HDMI output
 4*720P Ip cameras
 4*18Meters Network cables

[Print](#)

NVK704	
NVR	
7 inch digital LCD (Resolution 800X480) Support embedded Linux OS Support BNC and IPC Sync Input Support HDMI,CVBS Sync video output HDMI image resolution Max to 1920*1080 Support HD preview, all channels support Main stream Support Zoom function of preview and playback Support event, playback, backup recording ,support picture playback and search Support One-key recording Support fast playback Support P2P Support 4ch 720P/2ch 1080P simultaneous playback	
System	
Main processor	High performance embedded microprocessor
Operating system	Embedded LINUX OS
Video spec.	
Video compression format	H.264
Display Image Resolution	720P/960P/1080P 25FPS
Playback Image Resolution	4*720P 25FPS/2*1080P 25FPS
Motion Detection	can setup 192(16*12)pcs motion detection area each channel and multi-level sensitivity(1-6 levels adjustable)
Privacy Masking	Support
Audio spec.	
Audio compression format	adpcm
Two-way audio	1ch
Recording Mode	
Recording Mode	Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording
Recording storage	HDD, Network
Frame rate	30 fps NTSC; 25fps PAL
Playback	Max support 4ch 720P synchronously playback
Backup Mode	Support HDD, USB Flash Disk store & backup
Video	
Video Input	4CH 720P IPC
Video output	1ch HDMI, 7inch LCD (Resolution 800X480)
Other	
Network	1x100Mbps, RJ45 port;
RS485	Standard 485 port, support half-duplex, green terminal port

USB	2 USB 2.0 ports	
HDD	support 1 SATA HDD (MAX 4TB)	
Power	DC +12V	
Power consumption	16W-18W(not include HDD)	
4*IP cameras		
Camera Type		720P IP Camera
Camera	Image Sensor	1/4 inch 1 Megapixel CMOS sensor
	DSP	HI3518 DSP 32 dual-core , pure hardware compression
	IR-LED	36 PCS Φ5 IR LEDS
	Illuminate Distance	30m IR distance
	Day/Night	IR-CUT filter
	Min.Illumination	Color 0.6Lux/F1.2,B/W 0.08 Lux/F1.2
	Electronic Shutter	1/50(1/60)s-1/100,000s
	Lens	3.6/6mm Fixed Lens
	Lens Mount	CS Mount
	Digital Zoom	10X Digital Zoom
Video	Compression standard	H.264/M-JPEG
	Compression technology	Dual-stream compression technology
	Video frames	Real-time PAL 25fps,NTSC 30fps 1-30fpsAdjustable
	output bit rate	32Kbps~8000Kbps Adjustable
	Audio coding standard	AAC/G711 Codec standard
Image	Resolution	Main Stream:
		1280×720(video resolution);
		Sub Stream:640×360, 480×270,320×180;
Network	parameter settings	Brightness, contrast, chroma saturation,Image Quality Level
	protocol	RTSP , FTP , PPPoE, DHCP, TCP/IP、HTTP、UDP、RTP/RTCP、UPNP、SMTP、SIP、DDNS、DNS
	Alarm	Support Motion Detection, Linkage Alarm, Linkage recording, sensor trigger alarm functions
	Privacy Mask	Support
	WIFI	Support WIFI 802.11bgn,WCA3Gwireless networks
Interface	Audio Input	1CH input,Support the pickup input
	Audio output	1CH output,Support the headset or amplifier
	USB Interface	U disk storage
	Video output	1CH Video output,Support CVBS standard,PAL/NTSC Optional
	Network interface	RJ4510M/100 MEthernet port
Other	Power supply	DC 12V, Optional POE Remote power supply
	Waterproof Criterion	IP66
KITS		
Other	Work environment	-10°C~60°C90%RH