


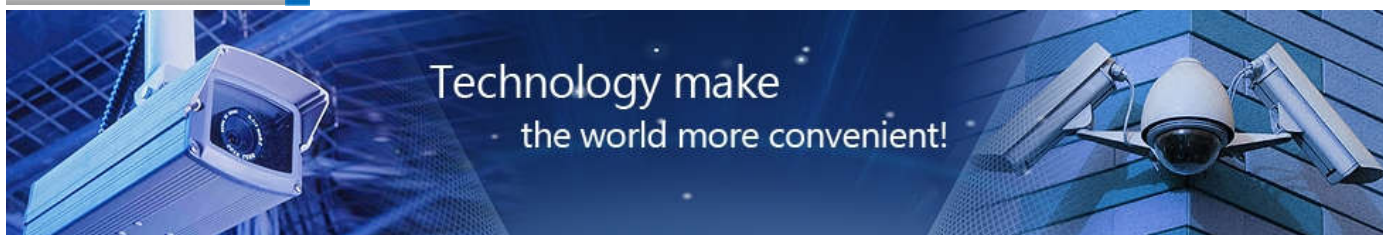

SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

[中文](#) | [English](#) Search[Home](#)[About Us](#)[Products](#)[Service&Support](#)[demo](#)[Contact Us](#)

Products

- ▼ DVR NVR HVR KITS
- ▼ AHD series
 - Hybrid AHD DVR
 - AHD camera
- ▼ CVI series
 - CVI camera
- ▼ Professional IP Camera
 - 3.0~5.0MP IP camera
 - 1080P IP Camera
 - 960P IP Camera
 - 720P IP Camera
 - IP Speed Dome
 - IPC Module
- ▼ Household IP Camera
- ▼ Network Video Recorder(NVR)
- ▼ Analog Camera
 - Weatherproof IR Camera
 - Vandal proof Dome Camera
 - Plastic Dome Camera
 - PTZ Camera
 - Specialty Camera
- ▼ Digital Video Recorder(DVR)
 - 24&32 Channels
- ▼ Peripheral
 - POE Switch
 - UTP Video Balun
 - Power supply
 - Cable&Connector
 - Tools

AHD8616SP

FHD 3 in 1 AHD DVR

16ch 1080P AHD

16ch 720PAHD/960H Analog

16ch 1080P/720P IP

support 4 HDD. Max 4T each

[Print](#)

Specification

Model	AHD8216SP
Support embedded Linux OS	
Support BNC and IPC Sync Input	
Support VGA ,HDMI,CVBS Sync video output	
VGA,HDMI image resolution Max to 1920*1080	
Support HD preview, all channels support Main stream	
Support Zoom function of preview and playback	
Support event,playback,backup recording ,support picture playback and search	
Support One-key recording	
Support fast playback	
Support P2P	
Support 4ch 960H/4ch 720P/4ch 1080P simultaneous playback	
System	
Main processor	High performance embedded microprocessor
Operating system	Embedded LINUX OS
Video spec.	
Video compression format	H.264
Display Image Resolution	AHD:16CH*1080P/720P/960H IP: 16CH*1080p/960p/720P
Playback Image Resolution	960H/720P/1080P 30FPS
Motion Detection	can setup 192(16*12)pcs motion detection area each channeland multi-level sensitivity(1-6 levels adjustable)
Privacy Masking	Support
Audio spec.	
Audio compression format	G.711
Two-way audio	support
Recording Mode	
Recording Mode	Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording
Recording storage	HDD,Network
Frame rate	30 fps NTSC;25fps PAL
Playback	Max support 4ch 1MP synchronously playback
Backup Mode	Support HDD,USB Flash Disk store & backup
Video	
Video Input	16CH BNC, RJ45
Video output	1ch CVBS(BNC), 1ch VGA and 1ch HDMI
Audio	
Audio Input	16ch RCA
Audio Output	1ch
Alarm	

Alarm Input	8ch
Alarm Output	1ch
Other	
Network	1x100Mbps,RJ45 port;
RS485	Standard 485 port,support half-duplex, green terminal port
USB	2 USB 2.0 ports
HDD	support 4 SATA HDD MAX4T
Power	DC +12V
Power consumption	16W-18W(not include HDD)
Operation temperature	0°C — +55°C
Operation humidity	10% — 90%
Demension	365mm * 426mm * 65 mm(1.5U hight)
Weight	3.5~4.1KGS(not include HDD)

Copyright © 2007 CCDCAM Security Systems | E-mail:sales@ccdcam.cn | TEL:+86 755 83106630 | FAX:+86 755 81093177 | 粤ICP备05064898号