

#### K6100


K6100-Y(silver) K6100-PVD(gold)

#### Specifications:

Card technology: Mifare 1 card, 13.56Mhz  
Working voltage: DC6V, 4pcs Alkaline batteries  
Working temperature: -20°C~+60°C  
Working humidity: 10%~85% RH  
Power consumption: Static current: ≤20μA, Dynamic current: ≤200 mA  
Lock Shell: SUS304 stainless steel  
Handle: SUS304 stainless steel  
Door thickness: Door thickness for 30-55mm above

[Inquire Now](#)

#### Description

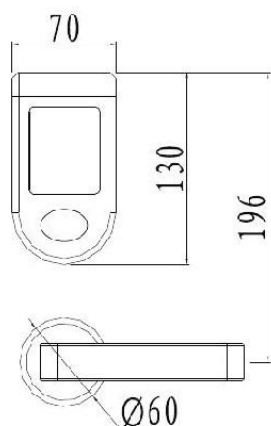

- Stand alone electronic lock with RFID technology.
- Brushed stainless steel finish.
- ANSI Standard mortise
- Handle lifted locking
- Compatible with Mifare Energy Saver
- Open by intelligent inductive cards or mechanical key
- Personalized Locking System and cylinder cover
- Step by step installation software, easy operation. OEM acceptable.
- Classified Access Authorization for safety management.
- Multiple operators with different card issuing authorizations
- All card with validity, guest card expires automatically at default check out date and time.
- Meeting room function and different levels of passage door functions.
- Lost guest card suspension simply by issuing a new guest card with suspending function.
- 200 event audit trail
- Receptionist card issuing records printable
- Low Battery Voltage warning.
- Lock failure alarm.
- Interface with most of the PMS systems
- CE & FCC Certificate