


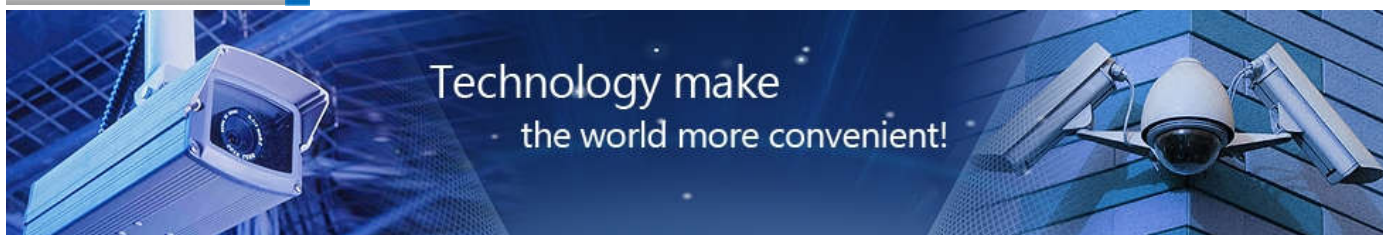

SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

[中文](#) | [English](#) Search[Home](#)[About Us](#)[Products](#)[Service&Support](#)[demo](#)[Contact Us](#)

Products

- ▼ DVR NVR HVR KITS
- ▼ AHD series
 - Hybrid AHD DVR
 - AHD camera
- ▼ CVI series
 - CVI camera
- ▼ Professional IP Camera
 - 3.0~5.0MP IP camera
 - 1080P IP Camera
 - 960P IP Camera
 - 720P IP Camera
 - IP Speed Dome
 - IPC Module
- ▼ Household IP Camera
- ▼ Network Video Recorder(NVR)
- ▼ Analog Camera
 - Weatherproof IR Camera
 - Vandal proof Dome Camera
 - Plastic Dome Camera
 - PTZ Camera
 - Specialty Camera
- ▼ Digital Video Recorder(DVR)
 - 24&32 Channels
- ▼ Peripheral
 - POE Switch
 - UTP Video Balun
 - Power supply
 - Cable&Connector
 - Tools

AHD8808PE

3 in 1 AHD DVR
IPC, Analog, AHD input
8*1080P AHD
8*960H/16*1080P/4*5MP
support P2P cloud
HDMI FHD output
Support 2HDD.

[Print](#)

Specification

Model	AHD8808PE
Support embedded Linux OS Support BNC and IPC Sync Input Support VGA ,HDMI video output VGA,HDMI image resolution Max to 1920*1080 Support HD preview, all channels support Main stream Support Zoom function of preview and playback Support event,playback,backup recording ,support picture playback and search Support One-key recording Support fast playback Support P2P Support 8ch 960H/16ch 1080P /4ch 5MP simultaneous playback	
System	
Main processor	High performance embedded microprocessor
Operating system	Embedded LINUX OS
Video spec.	
Video compression format	H.264
Display Image Resolution	1.AHD: 8CH*1080P (compatible with 720P AHD/960H analog) 2.AHD+IP:8CH*720P+8CH*1080P 3.IP: 16CH*1080P; 4.IP: 9CH*3MP; 5.IP: 4CH*5MP
Playback Image Resolution	960H/5MP 30FPS
Motion Detection	can setup 192(16*12)pcs motion detection area each channeland multi-level sensitivity(1-6 levels adjustable)
Privacy Masking	Support
Audio spec.	
Audio compression format	G711
Two-way audio	N/A
Recording Mode	
Recording Mode	Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording
Recording storage	HDD,Network
Frame rate	30 fps NTSC;25fps PAL
Playback	Max support 4ch 5MP synchronously playback
Backup Mode	Support HDD,USB Flash Disk store & backup
Video	
Video Input	8CH BNC, RJ45
Video output	1ch VGA and 1ch HDMI

Audio	
Audio Input	8ch BNC
Audio Output	1ch
Alarm	
Alarm Input	4ch
Alarm Output	N/A
Other	
Network	1x100Mbps,RJ45 port;
RS485	Standard 485 port,support half-duplex, green terminal port
USB	2 USB 2.0 ports
HDD	support 2 SATA HDD MAX4T
Power	DC +12V
Power consumption	16W-18W(not include HDD)
Operation temperature	0°C — + 55°C
Operation humidity	10% — 90%
Demension	365mm * 426mm * 65 mm(1.5U hight)
Weight	3.5~4.1KGS(not include HDD)

Copyright © 2007 CCDCAM Security Systems | E-mail:sales@ccdcam.cn | TEL:+86 755 83106630 | FAX:+86 755 81093177 | 粤ICP备05064898号