



### **Product Features :**

- \* IP56 waterproof outdoor unit.
- \* Outdoor camera with rain shade can avoid direct sunshine.
- \* Intercommunication is available between indoor unit and outdoor unit.
- \* Damage-proof outdoor unit.
- \* High definition camera, Night vision.
- \* Hands-free intercommunication.
- \* Monitoring the outdoor.
- \* Brightness, Chroma and ring adjustable.
- \* 8-chord melody rings for option.
- \* DIY installation.

### **Technique Parameter**

Adapter input Voltage: AC100-240V 50Hz-60Hz Dual-Voltage.

Adapter output Voltage、Current: DC15V 1500mA


Talk time delay: 120S  $\pm$ 10%

Monitor time delay: 40S  $\pm$ 10%


Dissipation: stand by < 0.5W, Working < 10W

Working Temperature: -35°C ~ 55°C


Relative humidity: 10%-90 % ( RH)

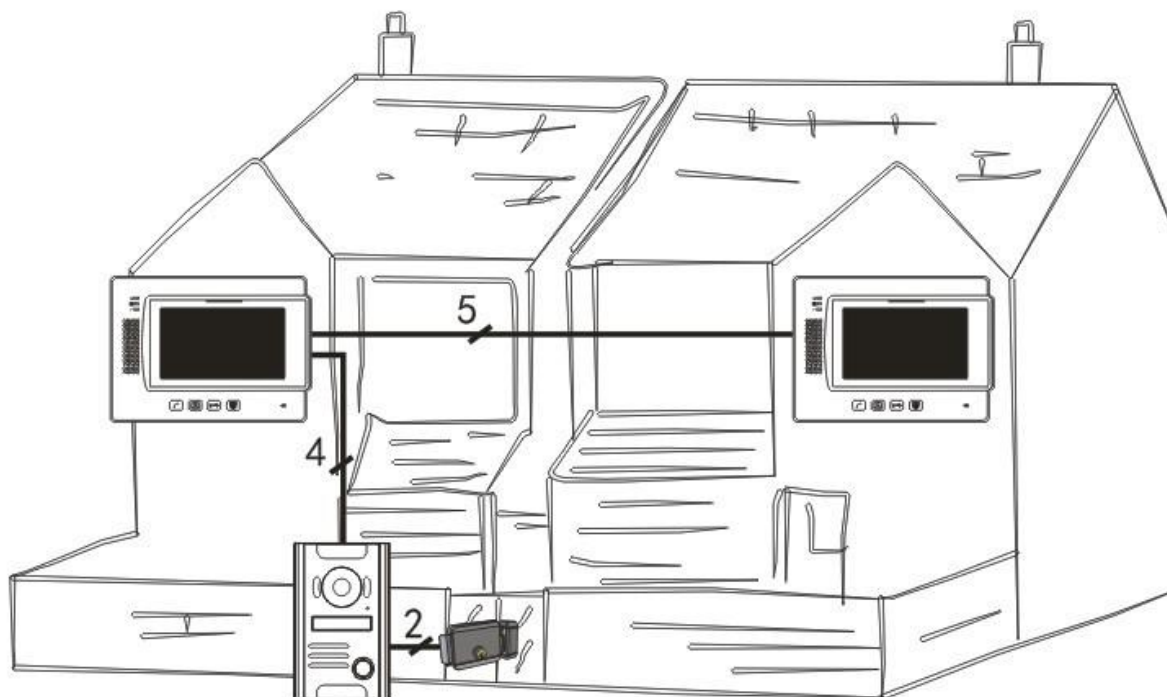


7"

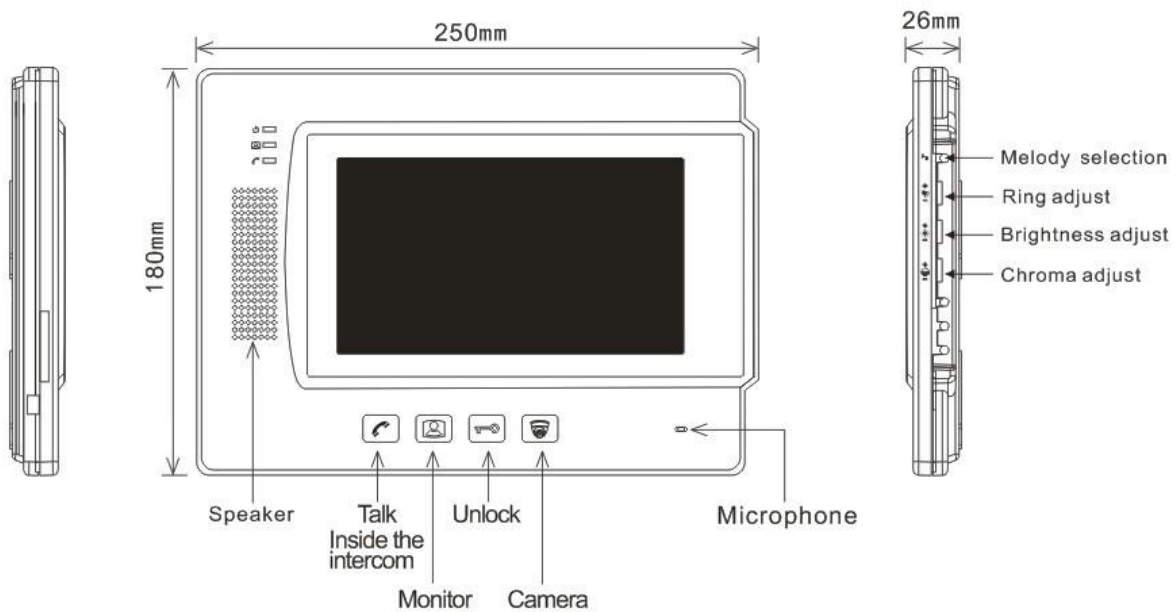


# Indoor unit installation

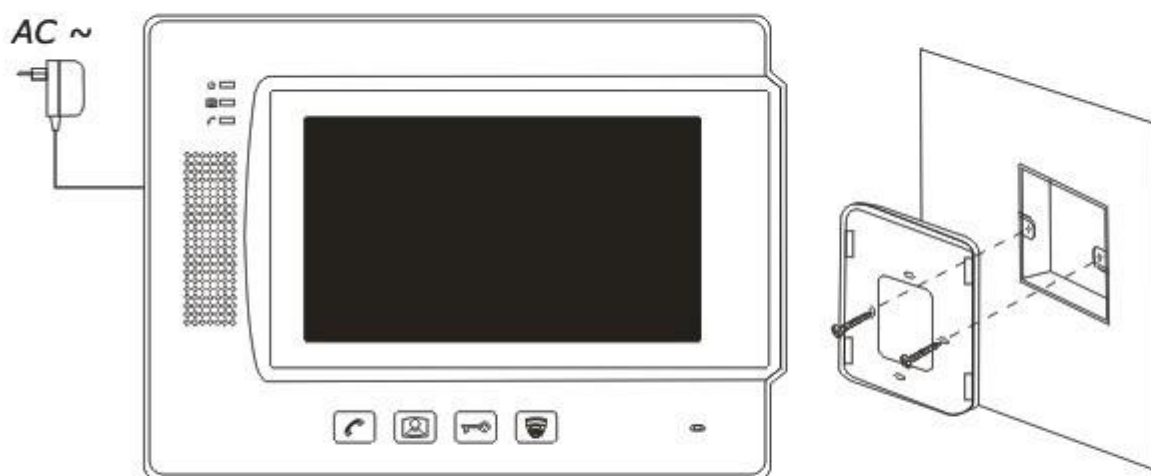

- ①、Fasten the bracket on the wall with screws.
  - ②、Hang the unit on the bracket after finishing the connection.
- Plug the enclosed adapter into the sockets of AC power .

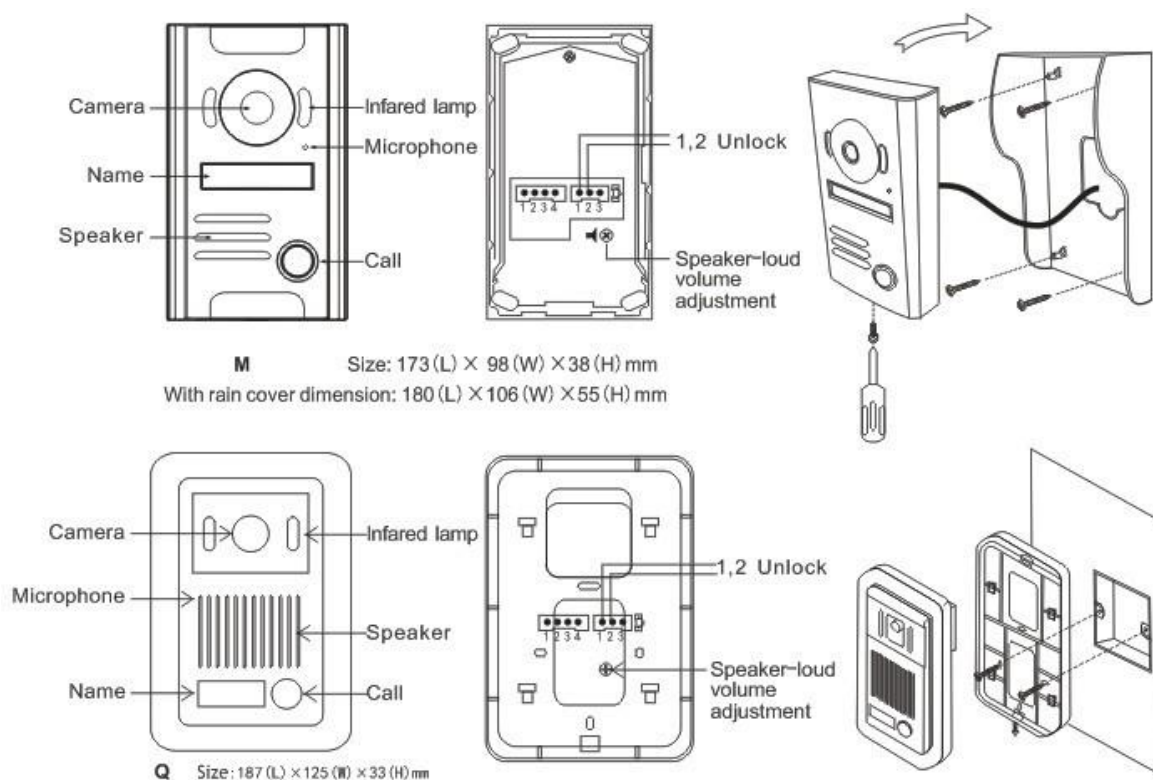

**1** 1(2) Outdoor unit + 1 Monitor ( 37M )

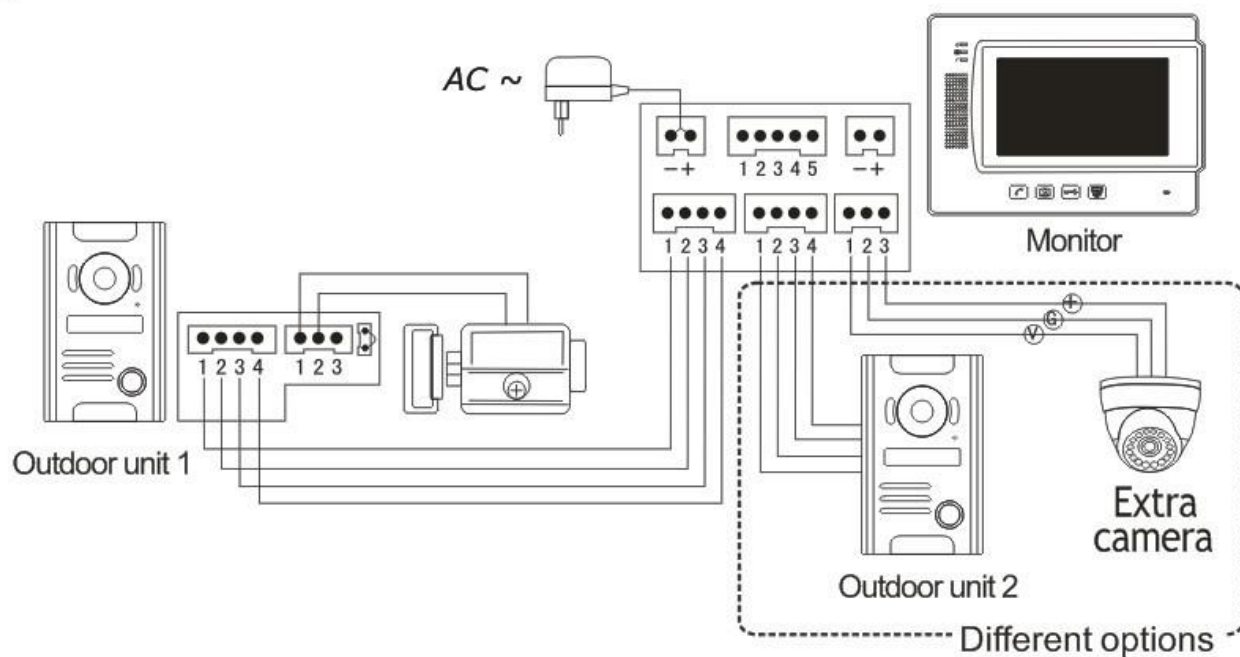

**2** 1 Outdoor unit + 2 (3) Monitor ( 37Q2 , 37Q3 )

