


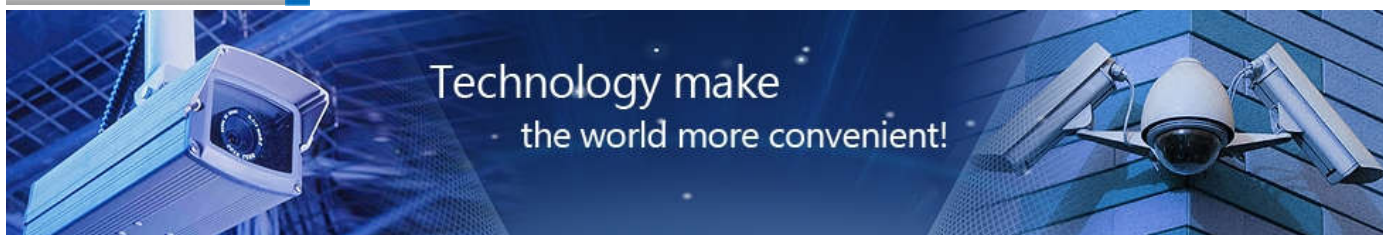

SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

[中文](#) | [English](#)

Search

[Home](#)
[About Us](#)
[Products](#)
[Service&Support](#)
[demo](#)
[Contact Us](#)


Products

- ▼ DVR NVR HVR KITS
- ▼ AHD series
 - Hybrid AHD DVR
 - AHD camera
- ▼ CVI series
 - CVI camera
- ▼ Professional IP Camera
 - 3.0~5.0MP IP camera
 - 1080P IP Camera
 - 960P IP Camera
 - 720P IP Camera
 - IP Speed Dome
 - IPC Module
- ▼ Household IP Camera
- ▼ Network Video Recorder(NVR)
- ▼ Analog Camera
 - Weatherproof IR Camera
 - Vandal proof Dome Camera
 - Plastic Dome Camera
 - PTZ Camera
 - Specialty Camera
- ▼ Digital Video Recorder(DVR)
 - 24&32 Channels
- ▼ Peripheral
 - POE Switch
 - UTP Video Balun
 - Power supply
 - Cable&Connector
 - Tools



Specification

Model	AHD8-X804L
Support embedded Linux OS Support BNC and IPC Sync Input Support VGA ,HDMI video output Support Zoom function of preview and playback Support event,playback,backup recording ,support picture playback and search Support One-key recording Support fast playback Support P2P Support 4ch 960H/4ch 720P simultaneous playback	
System	
Main processor	High performance embedded microprocessor
Operating system	Embedded LINUX OS
Video spec.	
Video compression format	H.264
Display Image Resolution	AHD:4CH*720P/960H IP: 4CH*720P
Playback Image Resolution	960H/720P 100/120FPS
Motion Detection	can setup 192(16*12)pcs motion detection area each channel and multi-level sensitivity(1-6 levels adjustable)
Audio spec.	
Audio compression format	G.711
Two-way audio	support
Recording Mode	
Recording Mode	Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording
Recording storage	HDD,Network
Frame rate	30 fps NTSC;25fps PAL
Playback	Max support 4ch 1MP synchronously playback
Backup Mode	Support HDD,USB Flash Disk store & backup
Video	
Video Input	4CH BNC, RJ45
Video output	1ch CVBS(BNC), 1ch VGA and 1ch HDMI
Audio	
Audio Input	4ch BNC
Audio Output	1ch
Alarm	
Alarm Input	N/A

AHD-X804L

3 in 1 AHD DVR
 IPC,Analog, AHD input
 4*720P AHD/960H
 4*720P IP
 support P2P cloud
 HDMI FHD output
 Support 1HDD*4TB.

[Print](#)

Alarm Output	N/A
Other	
Network	1x100Mbps,RJ45 port;
RS485	Standard 485 port,support half-duplex, green terminal port
remoter	N/A
panel	keyboard panel
USB	2 USB 2.0 ports
HDD	support 1 SATA HDD MAX4T
Power	DC +12V
Power consumption	16W-18W(not include HDD)
Operation temperature	0°C — +55°C
Operation humidity	10% — 90%
Demension	255*215*45mm(0.8U high)
Weight	1.6~1.8KGS(not include HDD)

Copyright © 2007 CCDCAM Security Systems | E-mail:sales@ccdcam.cn | TEL:+86 755 83106630 | FAX:+86 755 81093177 | 粤ICP备05064898号