


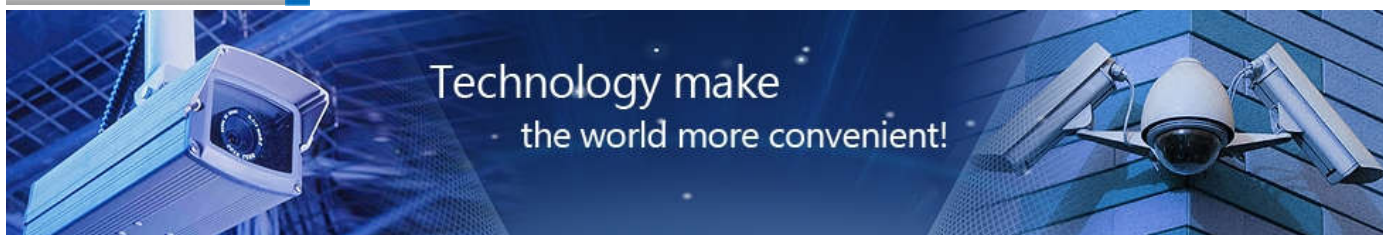

SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

[中文](#) | [English](#)

Search

[Home](#)[About Us](#)[Products](#)[Service&Support](#)[demo](#)[Contact Us](#)**Products**

## ▼ DVR NVR HVR KITS

## ▼ AHD series

Hybrid AHD DVR

AHD camera

## ▼ CVI series

CVI camera

## ▼ Professional IP Camera

3.0~5.0MP IP camera

1080P IP Camera

960P IP Camera

720P IP Camera

IP Speed Dome

IPC Module

## ▼ Household IP Camera

## ▼ Network Video Recorder(NVR)

## ▼ Analog Camera

Weatherproof IR Camera

Vandal proof Dome Camera

Plastic Dome Camera

PTZ Camera

Specialty Camera

## ▼ Digital Video Recorder(DVR)

24&amp;32 Channels

## ▼ Peripheral

POE Switch

UTP Video Balun

Power supply

Cable&amp;Connector

Tools



## Specification

## NVR7004T10KIT

4channel NVR kits

10inch LCD 1024\*768

NVR support onvif

1080P HDMI output

4\*720P Ip cameras

4\*18Meters Network cables

Print

## NVR7004T10KITS

## NVR

10.1 inch digital LCD (Resolution 1024X768 )

Support embedded Linux OS

Support BNC and IPC Sync Input

Support HDMI,CVBS Sync video output

HDMI image resolution Max to 1920\*1080

Support HD preview, all channels support Main stream

Support Zoom function of preview and playback

Support event,playback,backup recording ,support picture playback and search

Support One-key recording

Support fast playback

Support P2P

Support 4ch 720P/2ch 1080P simultaneous playback

## System

Main processor High performance embedded microprocessor

Operating system Embedded LINUX OS

## Video spec.

Video compression format H.264

Display Image Resolution 720P/960P/1080P 25FPS

Playback Image Resolution 4\*720P 25FPS/2\*1080P 25FPS

Motion Detection can setup 192(16\*12)pcs motion detection area  
each channel and multi-level sensitivity(1-6 levels adjustable)

Privacy Masking Support

## Audio spec.

Audio compression format adpcm

Two-way audio 1ch

## Recording Mode

Recording Mode Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording

Recording storage HDD,Network

Frame rate 30 fps NTSC;25fps PAL

Playback Max support 4ch 720P synchronously playback

Backup Mode Support HDD,USB Flash Disk store &amp; backup

## Video

Video Input 4CH 720P IPC

Video output 1ch HDMI, 7inch LCD (Resolution 1024X768 )

## Other

Network 1x100Mbps,RJ45 port;

RS485 Standard 485 port,support half-duplex, green terminal port

USB	2 USB 2.0 ports	
HDD	support 1 SATA HDD (MAX 4TB)	
Power	DC +12V	
Power consumption	16W-18W(not include HDD)	
4*IP cameras		
Camera Type		720P IP Camera
Camera	Image Sensor	1/4 inch 1 Megapixel CMOS sensor
	DSP	HI3518 DSP 32 dual-core , pure hardware compression
	IR-LED	36 PCS Φ5 IR LEDS
	Illuminate Distance	30m IR distance
	Day/Night	IR-CUT filter
	Min.Illumination	Color 0.6Lux/F1.2,B/W 0.08 Lux/F1.2
	Electronic Shutter	1/50(1/60)s-1/100,000s
	Lens	3.6/6mm Fixed Lens
	Lens Mount	CS Mount
Digital Zoom	10X Digital Zoom	
Video	Compression standard	H.264/M-JPEG
	Compression technology	Dual-stream compression technology
	Video frames	Real-time PAL 25fps,NTSC 30fps 1-30fpsAdjustable
	output bit rate	32Kbps~8000Kbps Adjustable
	Audio coding standard	AAC/G711 Codec standard
Image	Resolution	Main Stream: 1280×720(video resolution);
		Sub Stream:640×360, 480×270,320×180;
Network	parameter settings	Brightness, contrast, chroma saturation,Image Quality Level
	protocol	RTSP 、FTP、PPPoE、DHCP、TCP/IP、HTTP、UDP、RTP/RTCP、UPNP、SMTP、SIP、DDNS、DNS
	Alarm	Support Motion Detection, Linkage Alarm, Linkage recording, sensor trigger alarm functions
	Privacy Mask	Support
	WIFI	Support WIFI 802.11bgn,WCA3Gwireless networks
Interface	Audio Input	1CH input,Support the pickup input
	Audio output	1CH output,Support the headset or amplifier
	USB Interface	U disk storage
	Video output	1CH Video output,Support CVBS standard,PAL/NTSC Optional
Network interface	RJ4510M/100 MEthernet port	
Other	Power supply	DC 12V, Optional POE Remote power supply
	Waterproof Criterion	IP66
KITS		
Other	Work environment	-10℃~60℃C90%RH