


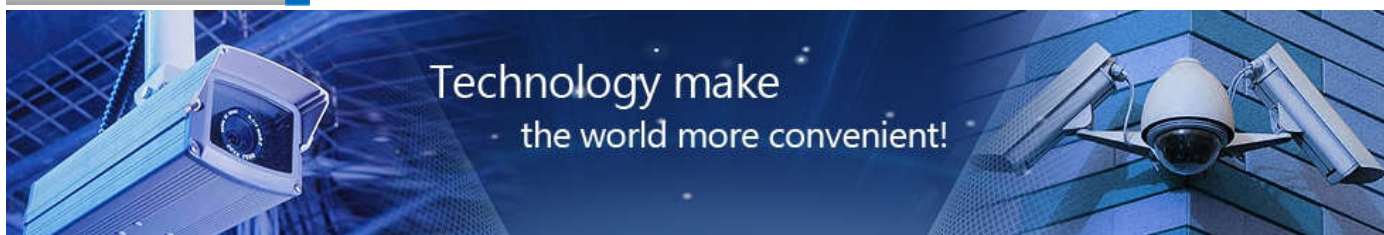

SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

[中文](#) | [English](#)

Search

[Home](#)[About Us](#)[Products](#)[Service&Support](#)[demo](#)[Contact Us](#)**Products**

- ▼ DVR NVR HVR KITS
- ▼ AHD series
 - Hybrid AHD DVR
 - AHD camera
- ▼ CVI series
 - CVI camera
- ▼ Professional IP Camera
 - 3.0~5.0MP IP camera
 - 1080P IP Camera
 - 960P IP Camera
 - 720P IP Camera
 - IP Speed Dome
 - IPC Module
- ▼ Household IP Camera
- ▼ Network Video Recorder(NVR)
- ▼ Analog Camera
 - Weatherproof IR Camera
 - Vandal proof Dome Camera
 - Plastic Dome Camera
 - PTZ Camera
 - Specialty Camera
- ▼ Digital Video Recorder(DVR)
 - 24&32 Channels
- ▼ Peripheral
 - POE Switch
 - UTP Video Balun
 - Power supply
 - Cable&Connector
 - Tools

NVKP06

4ch POE NVR kits
4pcs 1MP IP camera
POE DC12V support camera
4*20M network cable

[Print](#)**Specification**

NVKP06	
NVR	
Support embedded Linux OS	
Support IPC Sync Input	
Support HDMI,VGA Sync video output	
Support HD preview, all channels support Main stream	
Support Zoom function of preview and playback	
Support event,playback,backup recording ,support picture playback and search	
Support One-key recording	
Support fast playback	
Support P2P	
Support 4ch 720P simultaneous playback	
System	
Main processor	High performance embedded microprocessor
Operating system	Embedded LINUX OS
Video spec.	
Video compression format	H.264
Display Image Resolution	720P 25FPS
Playback Image Resolution	4*720P 25FPS
Motion Detection	can setup 192(16*12)pcs motion detection area each channeland multi-level sensitivity(1-6 levels adjustable)
Privacy Masking	Support
Recording Mode	
Recording Mode	Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording
Recording storage	HDD,Network
Frame rate	30 fps NTSC;25fps PAL
Playback	Max support 4ch 720P synchronously playback
Backup Mode	Support HDD,USB Flash Disk store & backup
Video	
Video Input	4CH 720P IPC
Video output	1ch HDMI, 1ch VGA
Other	
Network	1x100Mbps,RJ45 port;
USB	2 USB 2.0 ports
HDD	support 1 SATA HDD (MAX 4TB)
Power	input: DC12V output:DC12V for IP camera
Power consumption	16W-18W(not include HDD)
4*IP cameras	
Camera Type	720P IP Camera

Camera	Image Sensor	1/4 inch 1 Megapixel CMOS sensor
	DSP	HI3518 DSP 32 dual-core , pure hardware compression
	IR-LED	36 PCS IR LEDS
	Illuminate Distance	30m IR distance
	Day/Night	IR-CUT filter
	Min.Illumination	Color 0.6Lux/F1.2,B/W 0.08 Lux/F1.2
	Electronic Shutter	1/50(1/60)s-1/100,000s
	Lens	3.6/6mm Fixed Lens
	Lens Mount	CS Mount
	Digital Zoom	10X Digital Zoom
Video	Compression standard	H.264/M-JPEG
	Compression technology	Dual-stream compression technology
	Video frames	Real-time PAL 25fps,NTSC 30fps 1-30fpsAdjustable
	output bit rate	32Kbps~8000Kbps Adjustable
Image	Resolution	Main Stream:
		1280×720(video resolution);
		Sub Stream:640×360, 480×270,320×180;
Network	protocol	DHCP、TCP/IP、HTTP、UDP、DNS
	Alarm	Support Motion Detection, Linkage Alarm, Linkage recording, sensor trigger alarm functions
	Privacy Mask	Support
Vedio port	Video output	1CH Video output,RJ45,PAL/NTSC Optional
	Network interface	RJ4510M/100 MEthernet port
Other	Power supply	DC 12V
	Waterproof Criterion	IP66
KITS		
Other	Work environment	-10°C~60°C90%RH