SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

中文 | English

Home   About Us   Products   Service&Support   demo   Contact Us

Technology make
the world more convenient!
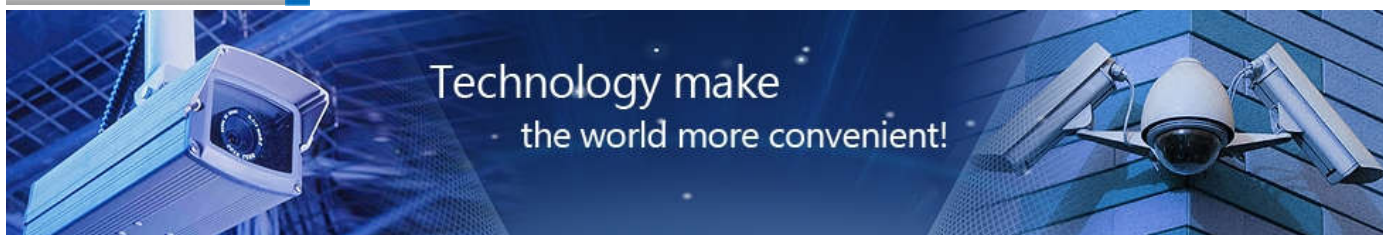
Products

▼ DVR NVR HVR KITS

▼ AHD series
　 Hybrid AHD DVR
　 AHD camera

▼ CVI series
　 CVI camera

▼ Professional IP Camera
　 3.0~5.0MP IP camera
　 1080P IP Camera
　 960P IP Camera
　 720P IP Camera
　 IP Speed Dome
　 IPC Module

▼ Household IP Camera

▼ Network Video Recorder(NVR)

▼ Analog Camera
　 Weatherproof IR Camera
　 Vandal proof Dome Camera
　 Plastic Dome Camera
　 PTZ Camera
　 Specialty Camera

▼ Digital Video Recorder(DVR)
　 24&32 Channels

▼ Peripheral
　 POE Switch
　 UTP Video Balun
　 Power supply
　 Cable&Connector
　 Tools

NVK05

4ch POE NVR kits
4pcs 1MP IP camera
WIN8 operate system
4*20M network cable

Print

Specification

NVKP05	
NVR	
Support embedded Linux OS Support IPC Sync Input Support HDMI,VGA Sync video output Support HD preview, all channels support Main stream Support Zoom function of preview and playback Support event,playback,backup recording ,support picture playback and search Support One-key recording Support fast playback Support P2P Support 4ch 720P simultaneous playback	
System	
Main processor	High performance embedded microprocessor
Operating system	Embedded LINUX OS
Video spec.	
Video compression format	H.264
Display Image Resolution	720P 25FPS
Playback Image Resolution	4*720P 25FPS
Motion Detection	can setup 192(16×12)pcs motion detection area each channeland multi-level sensitivity(1-6 levels adjustable)
Privacy Masking	Support
Recording Mode	
Recording Mode	Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording
Recording storage	HDD,Network
Frame rate	30 fps NTSC;25fps PAL
Playback	Max support 4ch 720P synchronously playback
Backup Mode	Support HDD,USB Flash Disk store & backup
Video	
Video Input	4CH 720P IPC
Video output	1ch HDMI, 1ch VGA
Other	
Network	1x100Mbps,RJ45 port;
USB	2 USB 2.0 ports
HDD	support 1 SATA HDD（MAX 4TB）
Power	input：DC12V
	Power consumption 16W-18W(not include HDD)
4*IP cameras	
Camera Type	720P IP Camera
Camera Image Sensor	1/4 inch 1 Megapixel CMOS sensor

	DSP	HI3518 DSP 32 dual-core , pure hardware compression
Video	IR-LED	36 PCS IR LEDS
	Illuminate Distance	30m IR distance
	Day/Night	IR-CUT filter
	Min.Illumination	Color 0.6Lux/F1.2,B/W 0.08 Lux/F1.2
	Electronic Shutter	1/50(1/60)s-1/100,000s
	Lens	3.6/6mm Fixed Lens
	Lens Mount	CS Mount
	Digital Zoom	10X Digital Zoom
	Compression standard	H.264/M-JPEG
	Compression technology	Dual-stream compression technology
	Video frames	Real-time PAL 25fps,NTSC 30fps 1-30fpsAdjustable
	output bit rate	32Kbps～8000Kbps Adjustable
Image	Resolution	Main Stream:
		1280×720(video resolution);
		Sub Stream:640×360, 480×270,320×180;
Network	protocol	DHCP、TCP/IP、HTTP、UDP、DNS
	Alarm	Support Motion Detection, Linkage Alarm, Linkage recording, sensor trigger alarm functions
	Privacy Mask	Support
Vedio port	Video output	1CH Video output,RJ45,PAL/NTSC Optional
	Network interface	RJ4510M/100 MEthernet port
Other	Power supply	DC 12V
	Waterproof Criterion	IP66

KITS

Other	Work environment	-10℃~60℃90%RH