



Product Features :

- * IP56 waterproof outdoor unit.
- * Outdoor camera with rain shade can avoid direct sunshine.
- * Intercommunication is available between indoor unit and outdoor unit.
- * Damage-proof outdoor unit.
- * High definition camera, Night vision.
- * Hands-free intercommunication.

- * Monitoring the outdoor.
- * Brightness, Chroma and ring adjustable.
- * 8-chord melody rings for option.
- * DIY installation.

Technique Parameter

Adapter input Voltage: AC100-240V 50Hz-60Hz Dual-Voltage.

Adapter output Voltage、Current: DC15V 1500mA


Talk time delay: 120S \pm 10%

Monitor time delay: 40S \pm 10%


Dissipation: stand by < 0.5W, Working < 10W

Working Temperature: -35°C ~ 55°C

Relative humidity: 10%-90 % (RH)

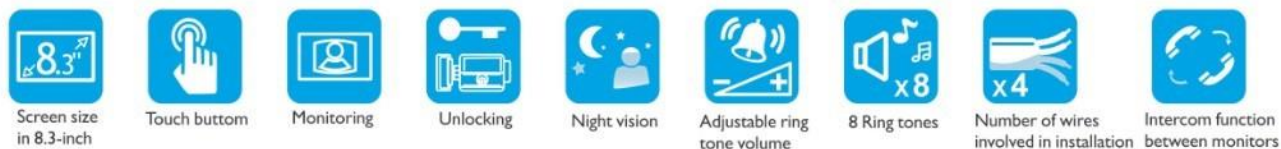

Settings buttons(volume,brightness,contrast and color)
 Monitor Dimensions: 250(L) x 180(H) x 30(W)

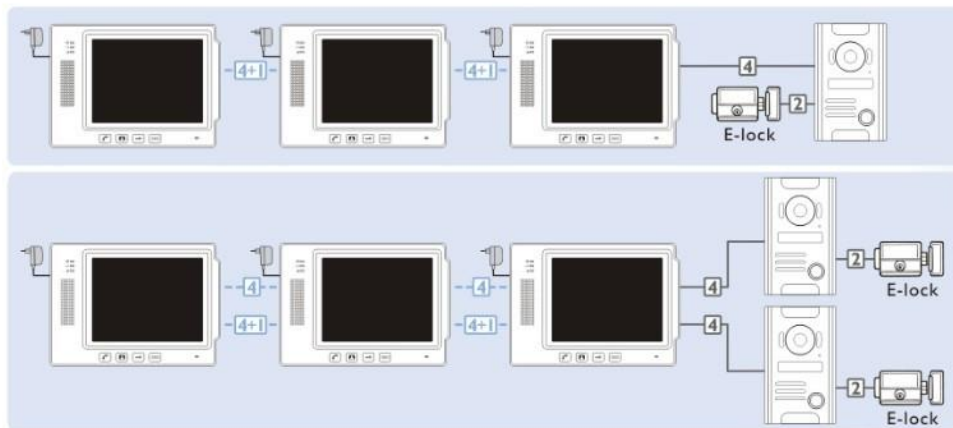

CE FC ISO9001 RoHS  

