

Product Features :

- * IP56 waterproof outdoor unit.
- * Outdoor camera with rain shade can avoid direct sunshine.
- * Intercommunication is available between indoor unit and outdoor unit.
- * Damage-proof outdoor unit.
- * High definition camera, Night vision.
- * Hands-free intercommunication.
- * Monitoring the outdoor.

- * Brightness, Chroma and ring adjustable.
- * 8-chord melody rings for option.
- * DIY installation.

Technique Parameter

Adapter input Voltage: AC100-240V 50Hz-60Hz Dual-Voltage.

Adapter output Voltage、Current: DC15V 1500mA

Talk time delay: 120S \pm 10%



Monitor time delay: 40S \pm 10%

Dissipation: stand by < 0.5W, Working < 10W


Working Temperature: -35°C ~ 55°C

Relative humidity: 10%-90 % (RH)


2 1 Outdoor unit + 2 (3) Monitor (37Q2 , 37Q3)

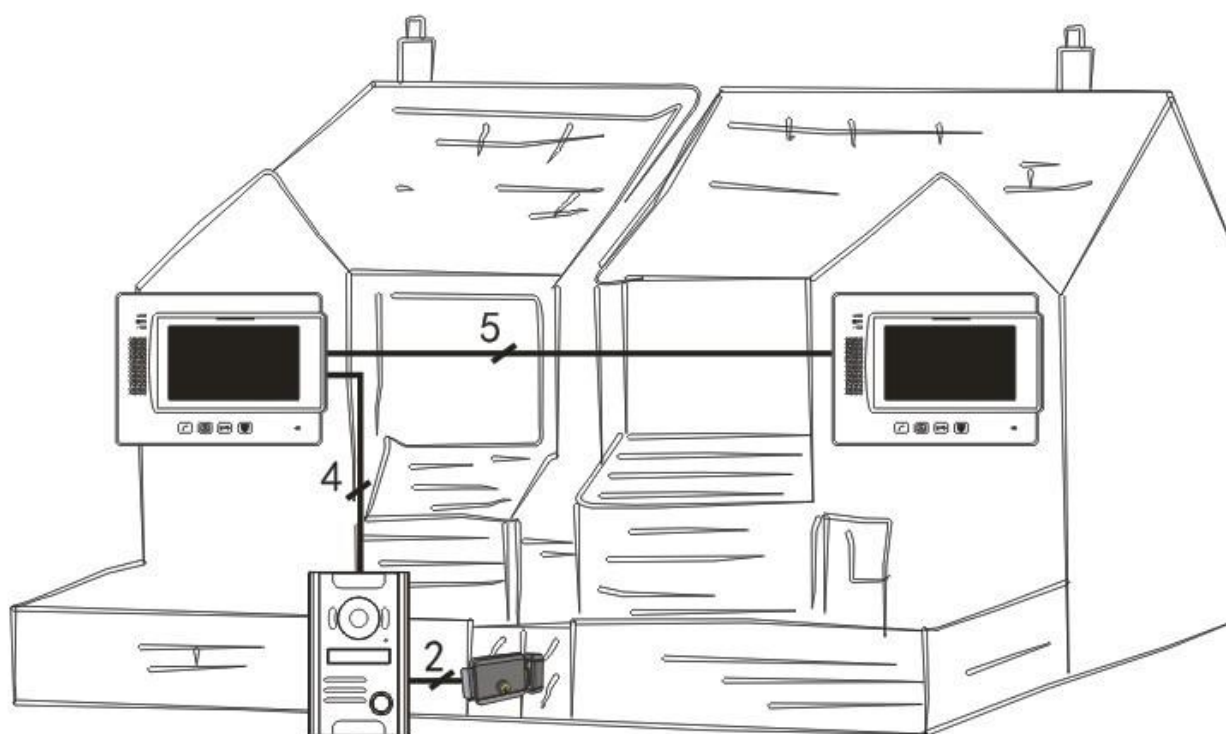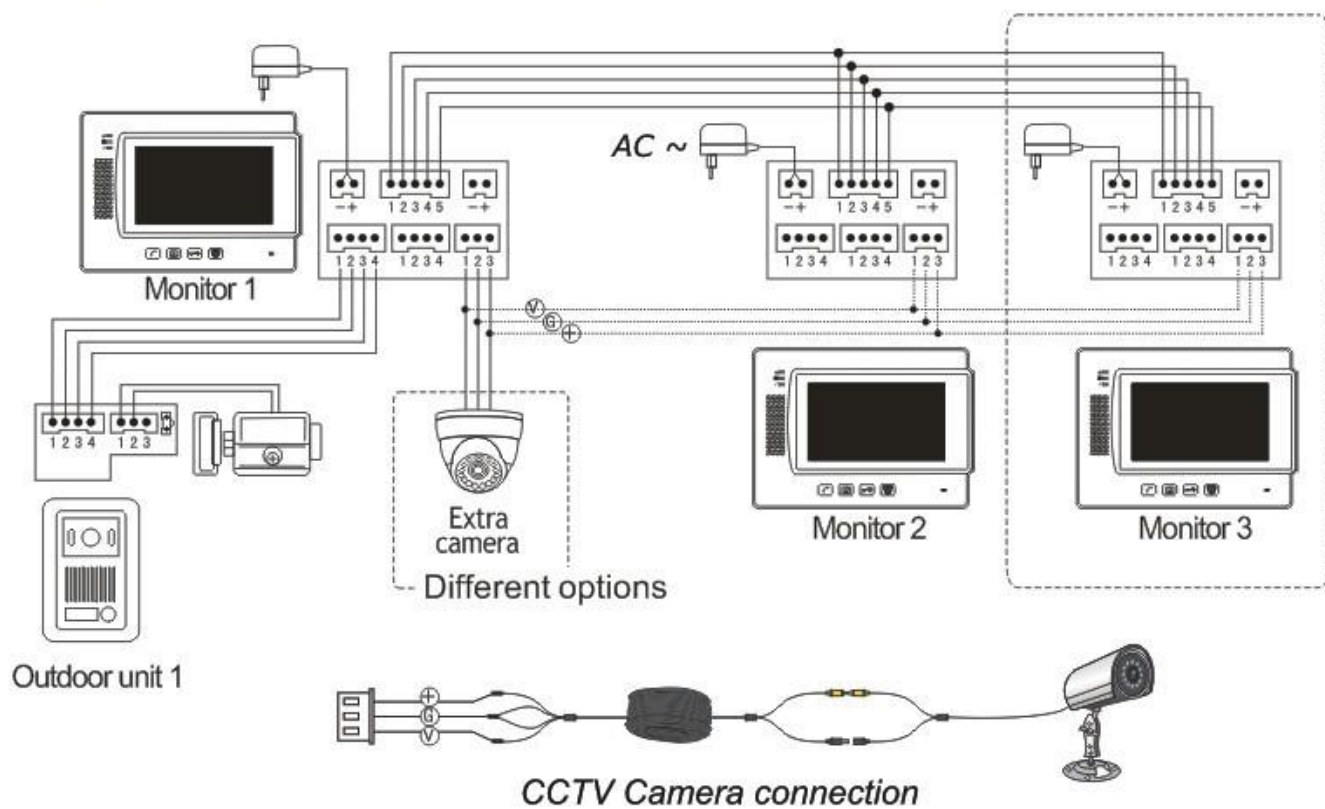


7"

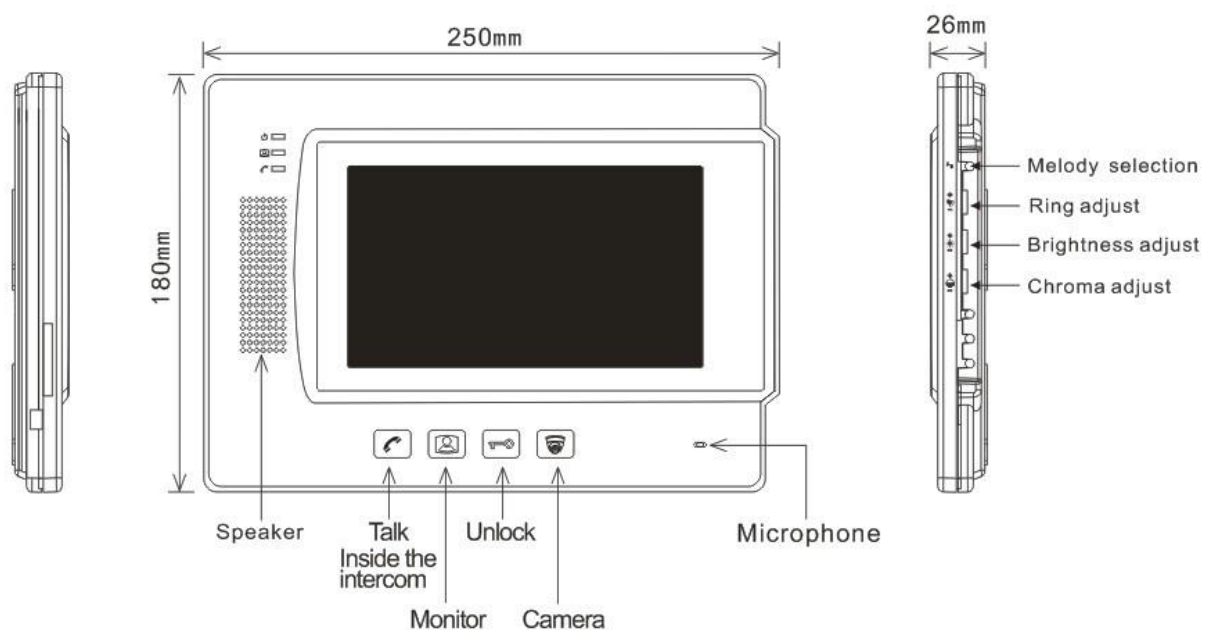

Indoor unit installation

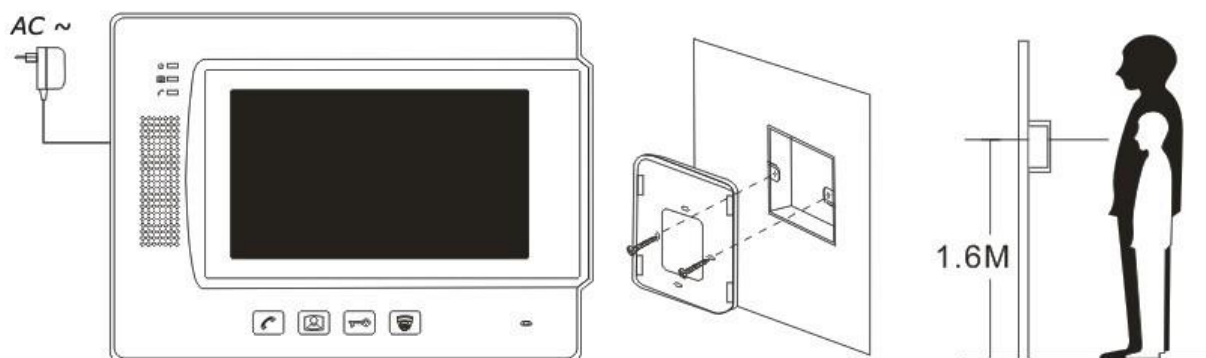

- ①、Fasten the bracket on the wall with screws.
- ②、Hang the unit on the bracket after finishing the connection.
Plug the enclosed adapter into the sockets of AC power .

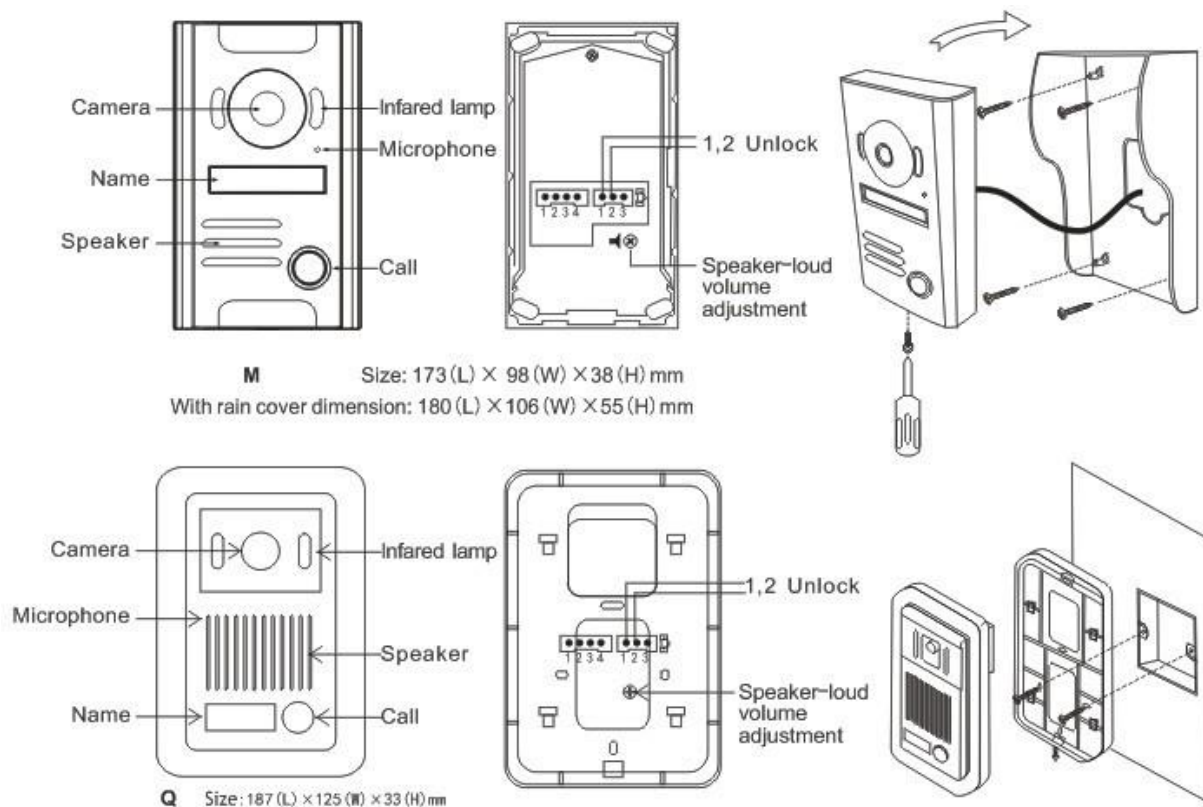

1 1(2) Outdoor unit + 1 Monitor (**37M**)

