SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

中文 | English

Search

Home   **About Us**   **Products**   **Service&Support**   **demo**   **Contact Us**

TECHNOLOGY make
the world more convenient!
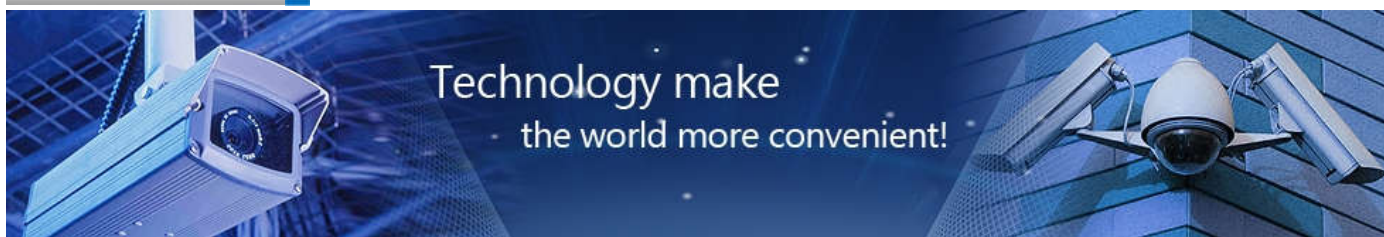
Products

▼ DVR NVR HVR KITS

▼ AHD series
   Hybrid AHD DVR
   AHD camera

▼ CVI series
   CVI camera

▼ Professional IP Camera
   3.0~5.0MP IP camera
   1080P IP Camera
   960P IP Camera
   720P IP Camera
   IP Speed Dome
   IPC Module

▼ Household IP Camera

▼ Network Video Recorder(NVR)

▼ Analog Camera
   Weatherproof IR Camera
   Vandal proof Dome Camera
   Plastic Dome Camera
   PTZ Camera
   Specialty Camera

▼ Digital Video Recorder(DVR)
   24&32 Channels

▼ Peripheral
   POE Switch
   UTP Video Balun
   Power supply
   Cable&Connector
   Tools

EC-W7046C/8046C

> ¢ 5X72pcs IR LEDS,
>60m IR Distance
>2.8mm-13mm 2MP varifocal lens
>With 3-Axis Bracket
>Water Resistance: IP66
>Cable Built-in Bracket

Print

Specification

Model No.	EC-W6546C	EC-W7046C	EC-W7546C	EC-W8046C	EC-WC8046C	EC-WC1246C
Image Sensor	CCD	Sony Effio-E	Sony Effio-A	Sony Effio-V	CMOS	Color 1/3" SONY 1.3MP
Effective Pixels	752(H)X582(V)	976 (H) × 582 (V)				1280(H) x 960(V)
Signal System	PAL /NTSC					
Horizontal Resolution	650 TV Lines	700 TV Lines	750 TV Lines	800TV Lines	800TV Lines	720P
Min. Illumination	Color(0.1 Lux), B/W(0 Lux,IR On)					
Lens Mount	2.8mm-13mm 2MP varifocal lens					
S/N Ratio	More Than 48dB (AGC Off)					
Electronic Shutter	1/50(1/60) ~ 1/10,000 Sec.					
White Balance	Auto					
AGC	Auto					
Infrared Luminary	72pcs Φ5 IR LEDs					
Illuminate Distance	60m IR distance					
I/O Connector	Power : DC Power Jack , Video Output : BNC					
Waterproof Criterion	IP66					
Video Output Level	1.0 Vp-p (75 Ohms, composite)					
Supplied Voltage	DC12V Voltage					
Power Consumption	IR On: 400mA max., IR Off: Less than 130mA					
Package Size	31X18X13cm					
Gross Weight	1.3kg					