SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

中文 | English

Home   **About Us**   **Products**   **Service&Support**   **demo**   **Contact Us**

Technology make
the world more convenient!
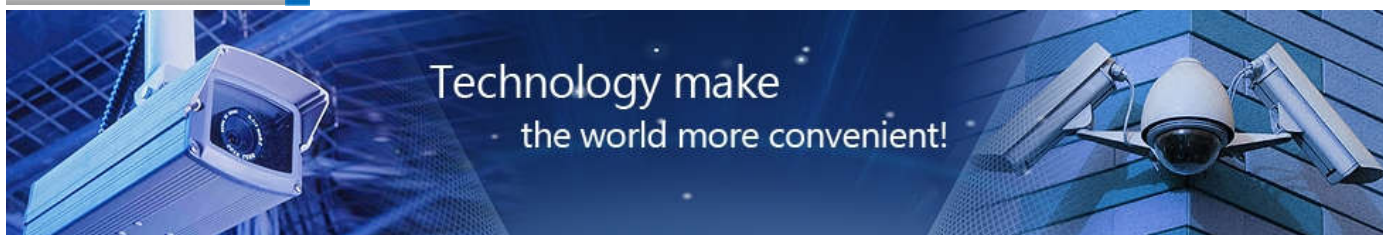
Products

▼ DVR NVR HVR KITS

▼ AHD series
 Hybrid AHD DVR
 AHD camera

▼ CVI series
 CVI camera

▼ Professional IP Camera
 3.0~5.0MP IP camera
 1080P IP Camera
 960P IP Camera
 720P IP Camera
 IP Speed Dome
 IPC Module

▼ Household IP Camera

▼ Network Video Recorder(NVR)

▼ Analog Camera
 Weatherproof IR Camera
 Vandal proof Dome Camera
 Plastic Dome Camera
 PTZ Camera
 Specialty Camera

▼ Digital Video Recorder(DVR)
 24&32 Channels

▼ Peripheral
 POE Switch
 UTP Video Balun
 Power supply
 Cable&Connector
 Tools

AHD8408LE

3 in 1 AHD DVR
IPC,Analog, AHD input
8*720P AHD
8*960H/8*720P IP
support P2P cloud
HDMI FHD output
Support 1HDD.

Print

Specification

Model	AHD8408LE
Support embedded Linux OS Support BNC and IPC Sync Input Support VGA ,HDMI,CVBS Sync video output VGA,HDMI image resolution Max to 1920*1080 Support HD preview, all channels support Main stream Support Zoom function of preview and playback Support event,playback,backup recording ,support picture playback and search Support One-key recording Support fast playback Support P2P Support 4ch 960H/4ch 720P simultaneous playback	
System	
Main processor	High performance embedded microprocessor
Operating system	Embedded LINUX OS
Video spec.	
Video compression format	H.264
Display Image Resolution	AHD: 8CH*720P/960H IP: 8CH*720P
Playback Image Resolution	960H/720P 30FPS
Motion Detection	can setup 192(16×12)pcs motion detection area each channeland multi-level sensitivity(1-6 levels adjustable)
Privacy Masking	Support
Audio spec.	
Audio compression format	G.711
Two-way audio	support
Recording Mode	
Recording Mode	Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording
Recording storage	HDD,Network
Frame rate	30 fps NTSC;25fps PAL
Playback	Max support 4ch 1MP synchronously playback
Backup Mode	Support HDD,USB Flash Disk store & backup
Video	
Video Input	8CH BNC, RJ45
Video output	1ch CVBS(BNC), 1ch VGA and 1ch HDMI
Audio	
Audio Input	4ch BNC
Audio Output	1ch
Alarm	

Alarm Input	N/A
Alarm Output	N/A
Other	
Network	1x100Mbps,RJ45 port;
RS485	Standard 485 port,support half-duplex, green terminal port
USB	2 USB 2.0 ports
HDD	support 1 SATA HDD MAX4T
Power	DC +12V
Power consumption	16W-18W(not include HDD)
Operation temperature	0℃－＋55℃
Operation humidity	10%－90%
Demension	**255*215*45mm（0.8U hight）**
Weight	1.2KGS(not include HDD)