


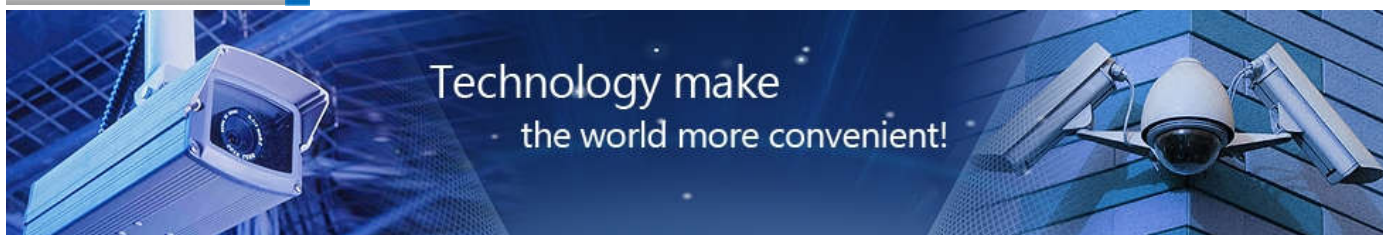

SHENZHEN CCDCAM TECHNOLOGY CO.,LTD

[中文](#) | [English](#)

Search

[Home](#)[About Us](#)[Products](#)[Service&Support](#)[demo](#)[Contact Us](#)**Products**

- ▼ DVR NVR HVR KITS
- ▼ AHD series
 - Hybrid AHD DVR
 - AHD camera
- ▼ CVI series
 - CVI camera
- ▼ Professional IP Camera
 - 3.0~5.0MP IP camera
 - 1080P IP Camera
 - 960P IP Camera
 - 720P IP Camera
 - IP Speed Dome
 - IPC Module
- ▼ Household IP Camera
- ▼ Network Video Recorder(NVR)
- ▼ Analog Camera
 - Weatherproof IR Camera
 - Vandal proof Dome Camera
 - Plastic Dome Camera
 - PTZ Camera
 - Specialty Camera
- ▼ Digital Video Recorder(DVR)
 - 24&32 Channels
- ▼ Peripheral
 - POE Switch
 - UTP Video Balun
 - Power supply
 - Cable&Connector
 - Tools

NVK01W

4ch WIFI NVR kits
4pcs 1MP WIFI IP camera
4pcs DC12V power for camera
Excluding wifi switcher

[Print](#)**Specification**

NVK01W		
NVR		
Support embedded Linux OS		
Support IPC Sync Input		
Support HDMI,VGA Sync video output		
Support HD preview, all channels support Main stream		
Support Zoom function of preview and playback		
Support event,playback,backup recording ,support picture playback and search		
Support One-key recording		
Support fast playback		
Support P2P		
Support 4ch 720P simultaneous playback		
System		
Main processor	High performance embedded microprocessor	
Operating system	Embedded LINUX OS	
Video spec.		
Video compression format	H.264	
Display Image Resolution	720P 25FPS	
Playback Image Resolution	4*720P 25FPS	
Motion Detection	can setup 192(16×12)pcs motion detection area each channeland multi-level sensitivity(1-6 levels adjustable)	
Privacy Masking	Support	
Recording Mode		
Recording Mode	Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording	
Recording storage	HDD,Network	
Frame rate	30 fps NTSC;25fps PAL	
Playback	Max support 4ch 720P synchronously playback	
Backup Mode	Support HDD,USB Flash Disk store & backup	
Video		
Video Input	4CH 720P IPC	
Video output	1ch HDMI, 1ch VGA	
Other		
Network	1x100Mbps,RJ45 port;	
USB	2 USB 2.0 ports	
HDD	support 1 SATA HDD (MAX 4TB)	
Power	input: DC12V	
Power consumption	16W-18W(not include HDD)	
4*IP WIFI cameras		
Camera Type	720P IP Camera	
Camera	Image Sensor	1/4 inch 1 Megapixel CMOS sensor

Video	DSP	HI3518 DSP 32 dual-core , pure hardware compression
	IR-LED	36 PCS IR LEDS
	Illuminate Distance	30m IR distance
	Day/Night	IR-CUT filter
	Min.Illumination	Color 0.6Lux/F1.2,B/W 0.08 Lux/F1.2
	Electronic Shutter	1/50(1/60)s-1/100,000s
	Lens	3.6/6mm Fixed Lens
	Lens Mount	CS Mount
	Digital Zoom	10X Digital Zoom
	Compression standard	H.264/M-JPEG
	Compression technology	Dual-stream compression technology
	Video frames	Real-time PAL 25fps,NTSC 30fps 1-30fpsAdjustable
	output bit rate	32Kbps~8000Kbps Adjustable
Image	Resolution	Main Stream:1280×720(video resolution);
		Sub Stream:640×360, 480×270,320×180;
Network	protocol	DHCP、TCP/IP、HTTP、UDP、DNS
	Alarm	Support Motion Detection, Linkage Alarm, Linkage recording, sensor trigger alarm functions
	Privacy Mask	Support
Vedio port	Video output	1CH Video output,RJ45/WIFI,PAL/NTSC Optional
	Network interface	RJ4510M/100M Ethernet port /WIFI
Other	Power supply	DC 12V
	Waterproof Criterion	IP66
KITS		
Other	Work environment	-10°C~60°C90%RH

Copyright © 2007 CCDCAM Security Systems | E-mail:sales@ccdcam.cn | TEL:+86 755 83106630 | FAX:+86 755 81093177 | 粤ICP备05064898号