

INSTRUMENT APPROACH CHART - ICAO	AD ELEVATION: 62 TRANS LEVEL: FL 040 TRANS ALT: 2500 (2438)	BEATRIX: APP 120.9 TWR 118.0 APRON 121.6 ATIS 132.1	RNAV (GNSS) RWY 29 REINA BEATRIX INT'L (TNCA) ARUBA

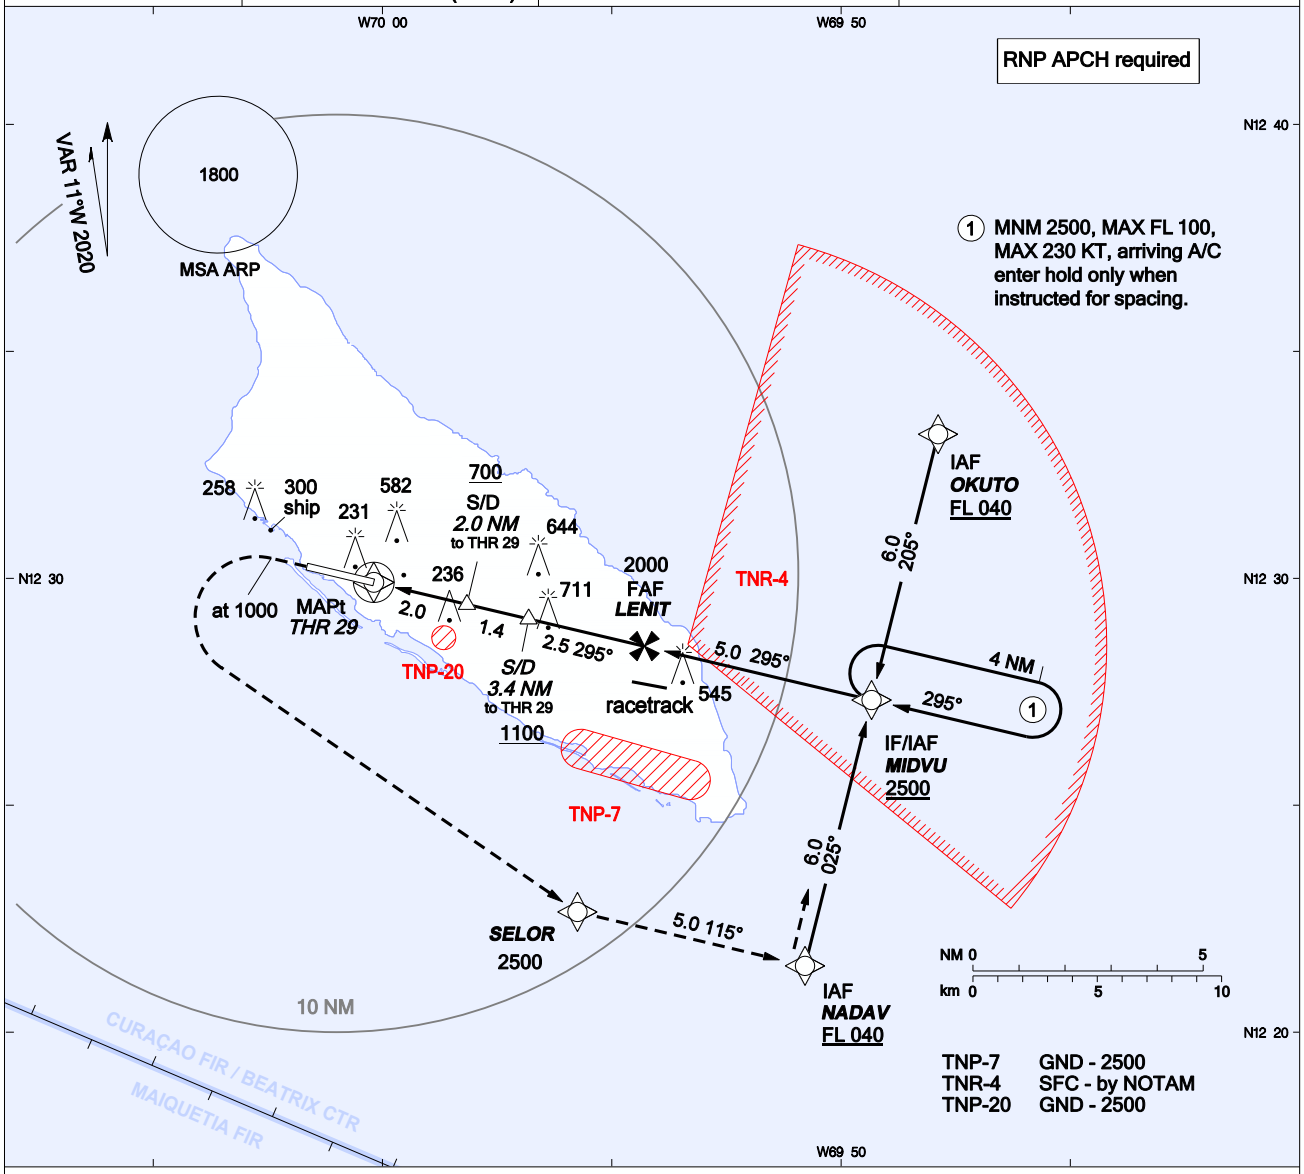

MISSED APPROACH: Climb on extended centerline to 1000 ft AMSL, then turn left climbing to 2500 ft AMSL direct to SELOR, then to NADAV and MIDVU and hold, or as directed by ATC.

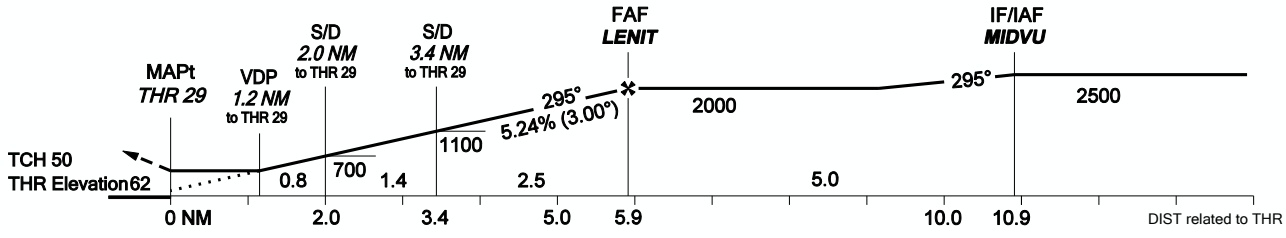

OCA(H)	A	B	C	D
LNAV/VNAV: MNM TEMP 0°C	361 (300)	370 (309)	380 (319)	390 (329)
LNAV	760 (699)	760 (699)	760 (699)	760 (699)
CIRCLING	880 (818)	880 (818)	1110 (1048)	1110 (1048)

GROUNDSPEED - DESCENT RATE						
KT	70	90	100	120	140	160
ft/min	372	478	531	637	743	849

1. TNR-4 is not active during RWY 29 operations.
2. Pilots should request RNP approach on first contact with Beatrix tower.
3. All heights are relative to AD elevation.
4. Visual descent point (VDP) is where LNAV OCA intersects 3° descent slope.
5. Altitudes, elevations and heights in feet, distances in nautical miles, bearings are magnetic.

CHANGES: Obstacle survey 2023, updated minima.

AERO INFO DATE 22 FEB 24