
AERODROME CHART - ICAO	ARP: N 18 02 27.34 W 063 06 32.25	AERODROME ELEV: 14' 4.2 m	JULIANA APPROACH: 128.950 JULIANA TOWER: 118.700	DIMENSIONS IN FEET, METERS ELEVATIONS IN FEET BEARINGS ARE MAGNETIC	PRINCESS JULIANA INT (TNCM) SINT MAARTEN

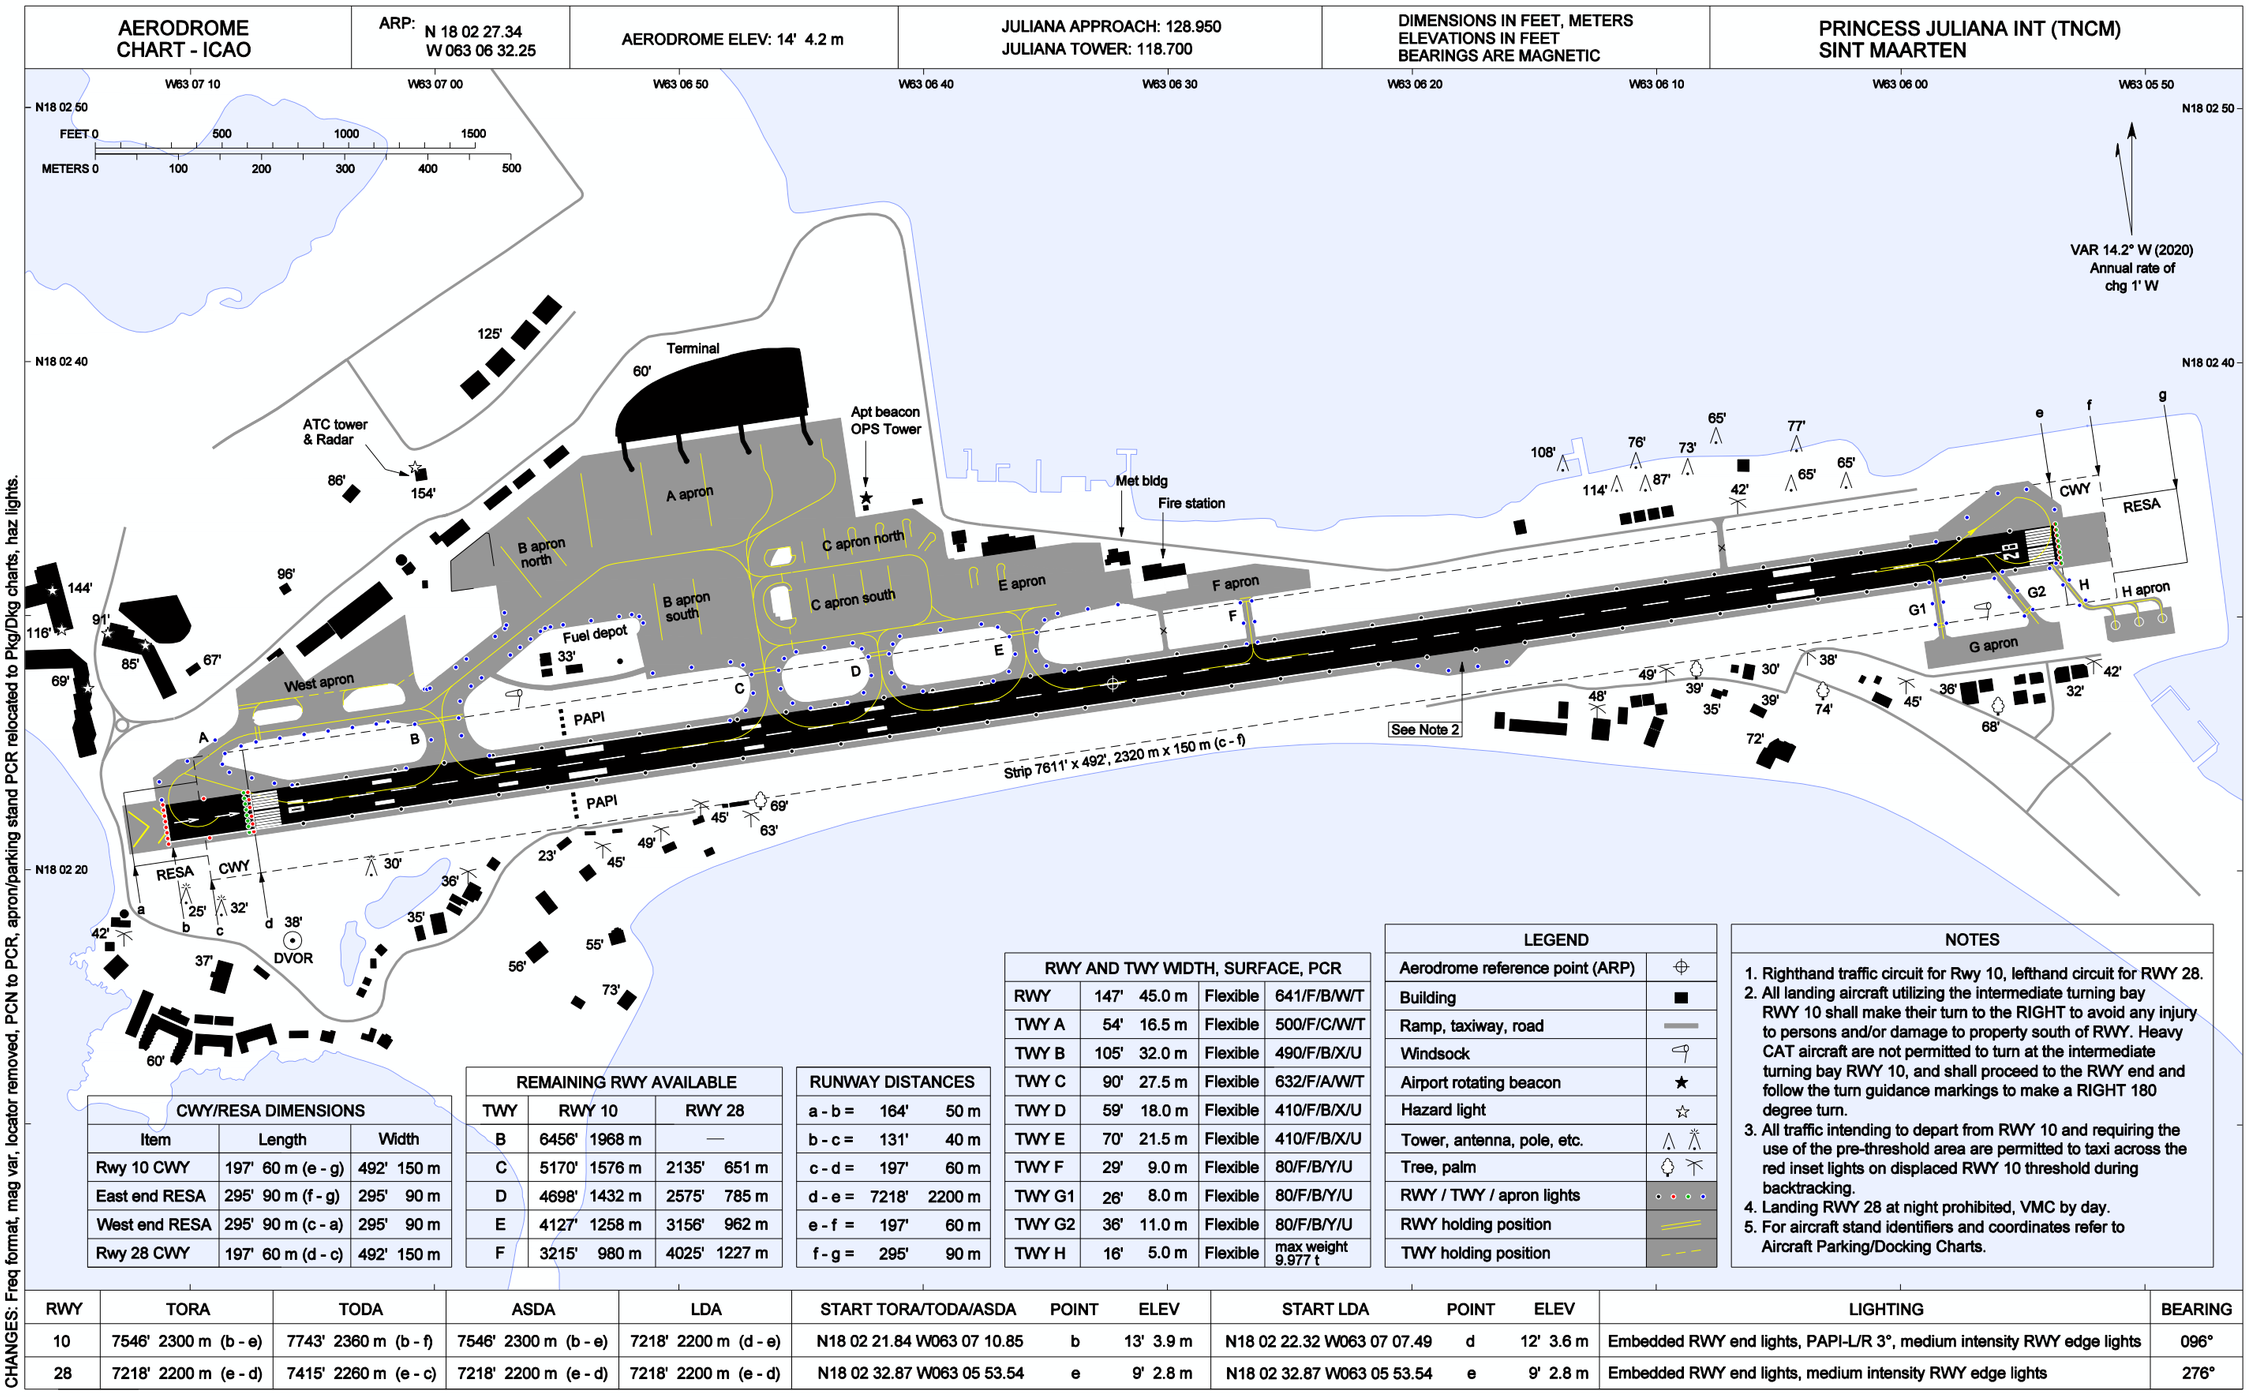

CWY/RESA DIMENSIONS		
Item	Length	Width
Rwy 10 CWY	197' 60 m (e - g)	492' 150 m
East end RESA	295' 90 m (f - g)	295' 90 m
West end RESA	295' 90 m (c - a)	295' 90 m
Rwy 28 CWY	197' 60 m (d - c)	492' 150 m

REMAINING RWY AVAILABLE		
TWY	RWY 10	RWY 28
B	6456' 1968 m	—
C	5170' 1576 m	2135' 651 m
D	4698' 1432 m	2575' 785 m
E	4127' 1258 m	3156' 962 m
F	3215' 980 m	4025' 1227 m

RUNWAY DISTANCES		
a - b =	164'	50 m
b - c =	131'	40 m
c - d =	197'	60 m
d - e =	7218'	2200 m
e - f =	197'	60 m
f - g =	295'	90 m

RWY AND TWY WIDTH, SURFACE, PCR				
RWY	147' 45.0 m	Flexible	641/F/B/W/T
TWY A	54' 16.5 m	Flexible	500/F/C/W/T
TWY B	105' 32.0 m	Flexible	490/F/B/X/U
TWY C	90' 27.5 m	Flexible	632/F/A/W/T
TWY D	59' 18.0 m	Flexible	410/F/B/X/U
TWY E	70' 21.5 m	Flexible	410/F/B/X/U
TWY F	29' 9.0 m	Flexible	80/F/B/Y/U
TWY G1	26' 8.0 m	Flexible	80/F/B/Y/U
TWY G2	36' 11.0 m	Flexible	80/F/B/Y/U
TWY H	16' 5.0 m	Flexible	max weight 9.977 t

LEGEND	
Aerodrome reference point (ARP)	⊕
Building	■
Ramp, taxiway, road	▬
Windsock	
Airport rotating beacon	★
Hazard light	☆
Tower, antenna, pole, etc.	
Tree, palm	
RWY / TWY / apron lights	
RWY holding position	
TWY holding position	

NOTES

1. Righthand traffic circuit for Rwy 10, lefthand circuit for RWY 28.
2. All landing aircraft utilizing the intermediate turning bay RWY 10 shall make their turn to the RIGHT to avoid any injury to persons and/or damage to property south of RWY. Heavy CAT aircraft are not permitted to turn at the intermediate turning bay RWY 10, and shall proceed to the RWY end and follow the turn guidance markings to make a RIGHT 180 degree turn.
3. All traffic intending to depart from RWY 10 and requiring the use of the pre-threshold area are permitted to taxi across the red inset lights on displaced RWY 10 threshold during backtracking.
4. Landing RWY 28 at night prohibited, VMC by day.
5. For aircraft stand identifiers and coordinates refer to Aircraft Parking/Docking Charts.

CHANGES: Freq format, mag var, locator removed, PCN to PCR, apron/parking stand PCR relocated to Pkg/Dkg charts, haz lights.

RWY	TORA	TODA	ASDA	LDA	START TORA/TODA/ASDA	POINT	ELEV	START LDA	POINT	ELEV	LIGHTING	BEARING
10	7546' 2300 m (b - e)	7743' 2360 m (b - f)	7546' 2300 m (b - e)	7218' 2200 m (d - e)	N18 02 21.84 W063 07 10.85	b	13' 3.9 m	N18 02 22.32 W063 07 07.49	d	12' 3.6 m	Embedded RWY end lights, PAPI-L/R 3°, medium intensity RWY edge lights	096°
28	7218' 2200 m (e - d)	7415' 2260 m (e - c)	7218' 2200 m (e - d)	7218' 2200 m (e - d)	N18 02 32.87 W063 05 53.54	e	9' 2.8 m	N18 02 32.87 W063 05 53.54	e	9' 2.8 m	Embedded RWY end lights, medium intensity RWY edge lights	276°

AERO INFO DATE 17 APR 2025