




Uses a SMT footprint so I don't mess up the art


Power is supplied by a single CR2032 battery, no regulator or protection.







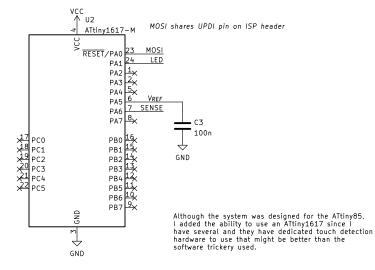



A small circuit to be handed out as a gift

Although originally designed for ATtiny85, allows for ATtiny1617

Title: Capacitve Sensing		Raccoon		
Savo Bajic	Date:	2022-02-13	Rev: 2	
KiCad E.D.A. eeschema 6.0.1-79c1e3a40b-116-ubu	ntu21.04.1	Size: USLetter	Sheet: 1/1	
 ,				