

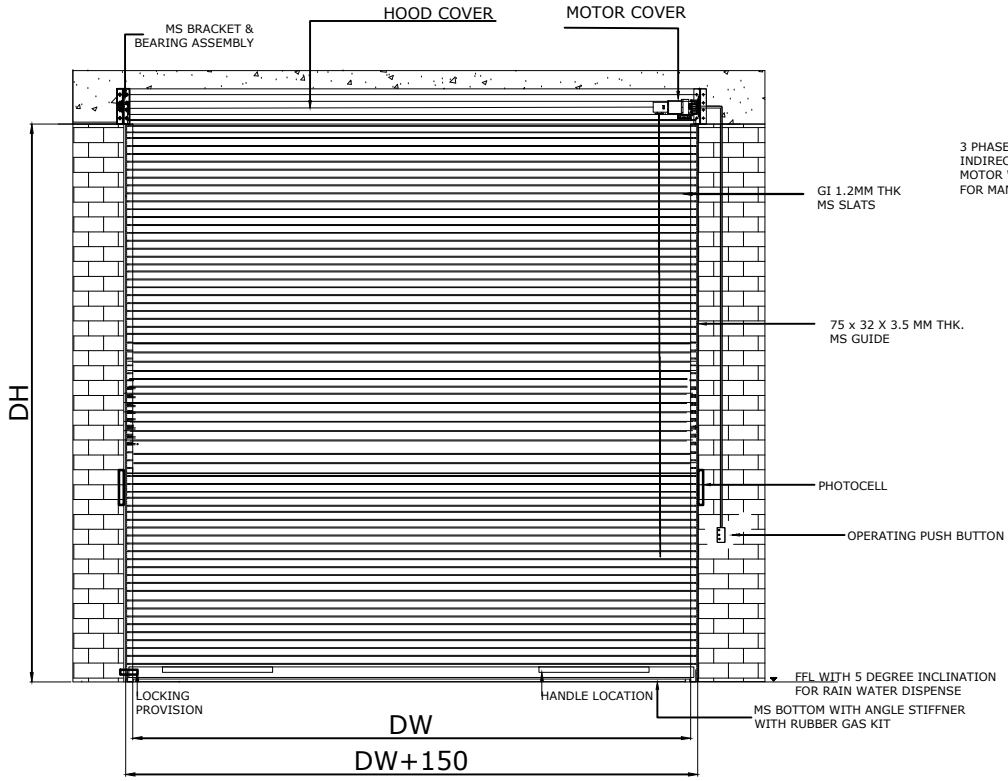



ELEVATION



PLAN

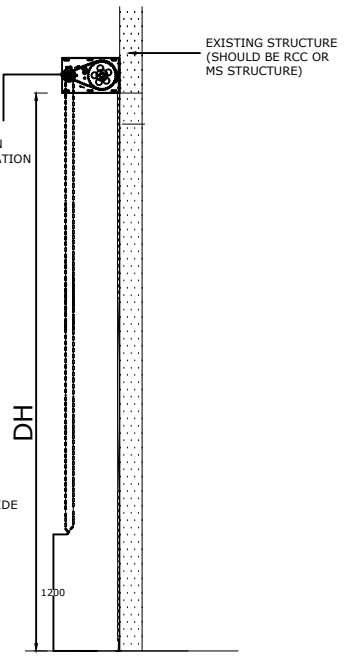

SIDE VIEW



Guide

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Double Wall Puff Insulated Rolling Shutter - InDirect Drive
2.	Motor	Jieolong make 3 phase motor with Sprocket chain arrangement
3.	Slat	95mm x 19mm with PU filled inside
4.	Wind Resistance	200 Km/hr
5.	Temperature	23 degree ± 3 degree
6.	Bottom Profile	125mm x 15mm with angle support
7.	Guide Profile	M.S." U" Shaped profile 75 x 32 x 3.5 mm thick
8.	Motor & Hood Cover	Made of GI Sheet Thickness 0.8 mm
9.	Accessories	Photocell,Push Button from both side, Loop detectors,Flashlamp
10.	Painting	Powder coated – Tata Blue (RAL 5015)

SIZE:-

DW	DH	QTY
3000	3500	1 No.

NOTE:-

1. All dimensions are in MM
2. Required civil work will be in client scope

NIHVA TECHNOLOGIES PVT. LTD.

	NAME	DATE
DRAWN	S.J	28/12/2023
CHECK	A.K	28/12/2023
APPRD	V.T	28/12/2023

CLIENT -TATA MOTORS

PROJECT-Double Wall Puff Insulat. Rolling Shutter

DWG. NO. - NTPL-210

FORMAT NO. - NIHVA-DD-F-03 | REV.00

SCALE: 01 | WT: | SHEET: 01 OF 01

If any queries contact : design1@nihva.com