FULLY AUTOMATIC LIQUID FILING MACHINE



Turn Table



FULLY AUTOMATIC LIQUID FILING MACHINE



FULLY AUTOMATIC LIQUID FILING MACHINE





Technical Specification

Model	BNEFLF-10-6H
Power	2.5 KW 230 V AC 50Hz
Air pressure	0.4-0.6MPa
Filling speed	40-60 bottles/min
Filling accuracy	≤±1%
Machine Dimension	2500X1200X2000mm
L X W X H	
Operated	PLC With HMI & Pneumatic Operated

SALIENT FEATURES OF THE EQUIPMENTS:

- NO CHANGE PARTS FOR ANY Bottles
- SINGLE POINT ON-LINE SPEED VARIATION CONTROL SYSTEM
- PRECISE BOTTLES PLACEMENT ACCURACY
- BUILT IN A.C. FREQ. DRIVE SYSTEM
- FULLY STAINLESS STEEL FINISH INCLUDING MAIN MACHINE FRAME
- MACHINE STRUCTURE OF S.S 304
- APLLICATION LIKE ANY TYPES OF BOTTLES IS POSSIBLE
- DELTA MAKE A.C VARIABLE FREQUENCY DRIVE FOR VARIABLE SPEED WITH CONSTANT TORQUE.
- MOTOR /GEARBOX OF MMC.
- FIBER OPTIC BASED PRODUCT SENSOR TO SENSE THE PRODUCT
- PLC BASED OPERATING SYSTEM FOR EASY OPERATING OF MACHINE
- OUTPUT SPEED FROM 10 TO 50 PRODUCTS PER MINUTE (SPEED DEPENDING UP ON THE PRODUCTS Viscosity)



VID-20180313-WA0125.mp4

Storage and Mixing Vessels.



Products









FULLY AUTOMATIC ROPP/ SCREW INNER WITH OUTER CAPPING MACHINE

Capping Machine (Automatic)





Video



VID-20150826-WA0016.mp4

Technical Specification

Model No	BNE-CPD3070
Speed	50 to 60 BPM
Bottle diameter	30 mm to 70 mm
Bottle Height	55 mm to 200 mm
Cap Specifications	22 mm to 53 mm Diameter
Power supply	3.5KW 230 V AC 50Hz
bottle Type	Round /Square / Customize
Make of Construction	SS304
Machine Dimension (L X W X H)	2000X700X1700mm

Printer





Removable battery

Can charge directly



Printer Details

- Easy to operate plug out or insert HP Ink cartridge.
- International design, imported core components and consumables.
- IP54 protection grade, steady performance under poor working condition.
- Modularized ink cartridge and print-head.
- 4.3-inch touch screen operation system. You could use the touch pen or finger edit contents on portable inkjet coders.
- Marking small objects, the effect familiar as small character machine.
- The print height of Industrial TIJ small handheld inkjet coder: 1mm Minimum, 12.7mm Maximum.
- The most suitable printing distance (from nozzle to products) is 2-5 mm.
- Support multi-languages: English, Arabic, Korean, Turkish, Italian
- Print content Text, time, batch number, serial, number, logo, QRcode, barcode .

Heating Chamber



Technical Specifications

- Tunnel Passage: 150 (W) X 250 (H)
- Heating Zone: Length 1200 mm
- Power Supply: Three Phase + Neutral
- Installed Power: 10 to 12 KW
- SS Slat Type Conveyor: Width 150mm
- Length of SS Slat Type: Conveyor 3200 mm
- Speed of Conveyor: 4 meter per min
- Temperature Controller PID to adjust the Temperature of Heating
- Zone
- AC Motor with Gearbox
- Variable Frequency Drive to Control the Speed of Conveyor

Secondary packaging automation for carton erector with pick and place with flap folding




CARTON TAPING MACHINE

Carton Taping MACHINE





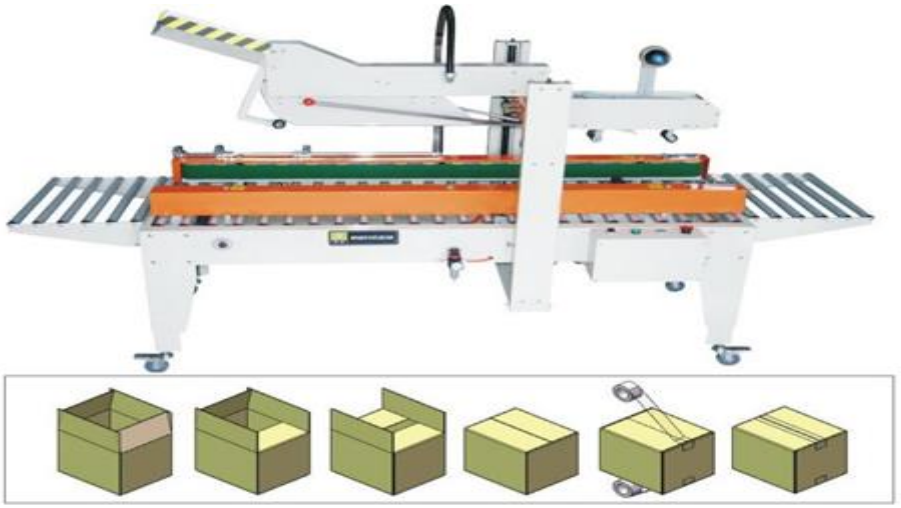

Model	BNE 5050 AZ
Power source	220V/50-60HZ, single phase
Power	240W
Width of adhesive tape	48, 60 mm
Max. packing dimension	500(W)x 500(H)x ANY SIZE (L)mm
Packing speed	18m/min
Machine size	1830(L)x920 (W)x1200-1800 (H)mm
Machine weight	180kg

CARTON TAPING M/C



Model No	BNE 6050
Max. Sealing Dimension in mm	Any Size (L) X 500 (W) X 500 (H)
Min. seal Dimension in mm	150 (L) X 120 (W) X 110 (H)
Machine Dimensions	960(L) x 974(W) x 1376(H)
Speed	20 meter/minute
Worktable Height	620-820 mm
Capacity	1800 Boxes/ Hour
Tape Type	BOPP PVC
Tape Width	2, 3 Inch
Power Supply	230 v ac 1 Phase

Video



VID-20180808-WA0029.mp4

AUTOMATIC BOX STRAPPING MACHINE



Model	BNE-PW8060C
Power Supply	220V,380V,440V 50/60Hz
Strap width	9,12,15,5,19 mm
Tension Adjustment	0-70kgs
Speed	2.4sec / per strap
Power Consumption	850W
Max Package Size	W850xH600mm(W33.5"xH23.6"
Mini Package Size	W100 x H30mm(W3.9"x H1.2")
Machine Size	L1440xW640xH1517mm(L56.7 xW25.2 x H59.7")
Shipping Size	L1480 x W700 x H1700mm (L58.3"xW27.6x H66.9")
Net Weight	210kgs
Gross weight	250kgs