NIHVA

NIHVA TECHNOLOGIES PVT. LTD.

Dock Leveller



- SOLUTIONS
- SERVICES
- SATISFACTION

www.nihva.com

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Dock Leveller

LOADING EQUIPMENTS

NIHVA Technologies Pvt.Ltd is the premier solutions provider of Safe, Effective, and technologically innovative material handling equipment's.

We offer verity of Loading Equipments including Dock levellers, Dock Shelters, Dock Seal, Scissor Lifts, Good Lifts along with other material handling products. We offer turnkey solutions for the most demanding freight-handling needs. Dock Levellers are one of the simplest equipment, designed according to the Indian conditions. Continues operations & ruggedness for not only helping the loading & unloading the vehicles easily but also reducing the dispatch time of the vehicles significantly.

Our gamut of hydraulic dock levellers design & fabricated extensive used for heavy loading and unloading.





FEATURES


- Robust design, safe operations and long term reliability.
- Total control on basic hydraulic like pressure and flow.
- Velocity safety stops.
- Simple electric panel with push button.
- Priority to safe working operations.
- Long excellent stability.
- Consistency in working performance.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.



Why NIHVA dock leveller?

- Heavy duty structure to take the dynamic load.
- Stronger Base Frame with self-standing capability.
- Stronger Lip & rear Hinges.
- 16 mm thick lip plate with step at tip for adopting smaller vehicles.
- Rear Strong hinge support for self standing capacity.
- Collapsible Telescopic Side Guard for safety protection.
- Single Approachable steady rest for maintenance.
- Stand alone power pack and control panel for ease of operation and maintenance.

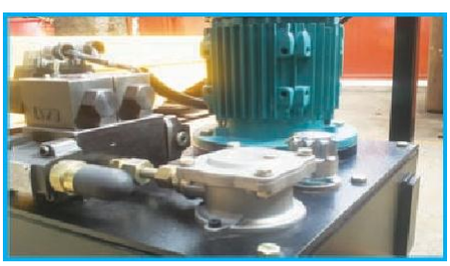






NIHVA TECHNOLOGIES PVT. LTD.


Dock Leveller

TECHNICAL SPECIFICATIONS FOR 09 TONS (std.)

Sr. No.	Description	Specifications
1	Capacity	6/9/15/22 Ton
2	Dock operation mode	AC power pack hydraulically operated
3	Lip operation mode	Hydraulic
4	Operation control	Through panel
5	Loading platform height from road	4 Ft
6	Travel above & below dock level	(+) 300 / (-) 150 mm
7	Platform Size (W x L)	2000 mm x 2500 mm
8	Lip size (W x L)	2000 x 400 mm
9	Shut Height	480 mm
10	Working length	2900 mm
11	Overall length	2000mm x 2500mm + Lip Length (400mm)
12	Maximum slope can be achieved	10%
13	Clear Pit dimensions (W x L x D)	(W) 2050mm x (L) 2550 mm x (D) 485 mm
14	Hydraulic power pack	Standard
15	Driver type	Direct by electric Motor
16	Motor Ratings	1 H.P Motor
17	Pump design flow	2.5 LPM
18	Pump pressure	120 bar Operating 200 bar Max.
19	Safety valve set pressure	120 Kg/cm²
20	Pump Type	Gear
21	Volume of oil receiver	7 Lit
22	No Of Deck cylinder	2 No
23	Lip Cylinder	1 No
24	Dock Bumper	1 Pair

09 TONS CAPACITY

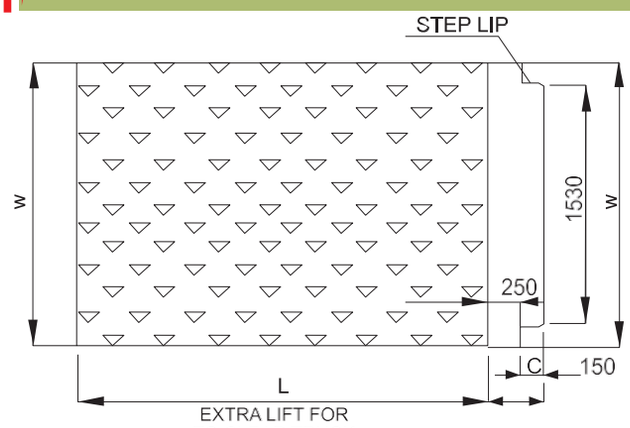

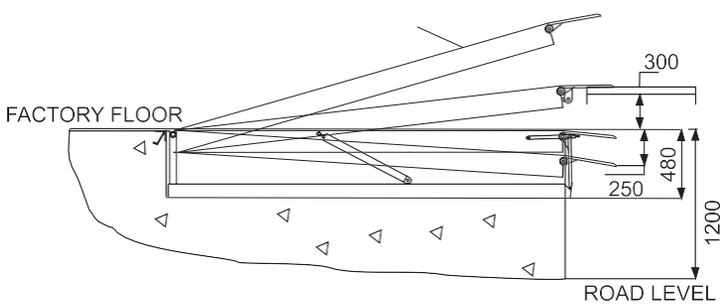

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA DOCK LEVELLERS LOAD / SIZES STD. SPECIFICATIONS

Capacity Kgs	Platform Width (mm)	Platform Length (mm)	Lip Length (mm)	Pit Width (mm)	Pit Height (mm)
6000	2000	2500	400	2050	485
9000	2000	2500	400	2050	485
15000	2000	2500	400	2050	485
22000	2000	2500	400	2050	550





LOADING EQUIPMENTS

- **Scissor Lift.**
- **Load House**
- **Goods Lift**
- **Mobile Ramp.**
- **Dock Leveller.**
- **Dock Shelter / Dock Seal.**

NIHVA

NIHVA TECHNOLOGIES PVT. LTD.

RETRACTABLE DOCK SHELTER

NIHVA Dock shelter fills gap between Building and Vehicle at the loading point, avoiding expensive temperature variations with respect to the outside of the warehouse. There are several models available according to the door structure of the warehouse, type of vechile used and the type of goods to handle.

NIHVA Dock Shelters are made with the covering sheets in Polyester/PVC and the front flaps are made in Thick PVC laminated with Two or Three Layers of Polyester fabric. It satisfies every requirement of avoiding of heat exchange between the inside and the outside of the warehouse. Dock Shelters have the quality of not transmitting the vehicle's force of impact to the warehouse structure The sealing portal is surrounded by a metal profile that provides a pleasing aesthetic finish.

STD. SIZE : 3500 X 3500 CLEAR OPENING ,

USED SIZE : 2400 X 2400

Need To Confirm Below While Designing Dock Shelter

- Loading bay height from the ground?
- How wide and how high are the docking vehicles?
- Do different Vehicle sizes have to load at the same loading bay?
- What type of goods are loaded?



NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

SERVICE BACK UP / MAINTENANCE / AMC



NIHVA SERVICE SOLUTIONS

Preventing a problem is always better than fixing one. That simple philosophy is behind all our Service Contracts as they are designed to reduce operational risks and help provide you with a trouble-free materials handling operation. This allows you to concentrate on your core business rather than worrying about unexpected breakdowns, scheduling maintenance, ordering parts or managing service engineers.

MULTIPLE OF SERVICES & AMC SOLUTIONS

Simply choose the Service Contract you require and let us do the rest:

- **SAFETY INSPECTION**

  Designed to keep your Equipment's operating safely and provide protection for your workforce. This contract ensures that your Equipment's always comply with the safety standards set by national laws and regulating bodies.

- **PREVENTIVE MAINTENANCE**

  This contract is an effective way to prevent unplanned downtime and costly repairs. We take responsibility for maintaining your Equipment according to a pre-determined plan as well as ensuring that they meet all safety requirements.

- **FULL SERVICE**

  This contract is designed to take care of all your equipment's maintenance and repair requirements in order to provide you with the highest levels of operational performance and uptime.

We offer the services in order to customize your contract as per your exact needs: 24/7 service, On-site NIHVA service technician, entire NIHVA maintenance team along with combined support package.

OUR ACTIVITIES

- Door Automation
- Automation Solutions
- Material –andling Equipments

OPTIONAL ACCESSORIES

Rubber Bumper



Flashing Light



Traffic Light



Dock Lights



Vehicle Wheel Restraint



Vehicle Wheel Alignment guides



NIHVA TECHNOLOGIES PVT. LTD.

Regd. Office:
8/1 Coromant Hsg. Soc. Sec. No. 27,
Nigdi, Pradhikaran, Pune - 411044.

Tel. : + 91 20 6630 4033
Mob. : + 91 855 109 1333
Email: sales@nihva.com
Web. : www.nihva.com

NIHVA