NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Avgol India Private Limited
Mandideep, Dist.Raisen, MP

Date : 18.01.2021
Quote NO : SQT.20.21.2867 R1
Kind Attn : Sudhir Singh
Email Id : Sudhir.Singh@avgol.com
Contact No : 8770377796

Project Name & Location: Halol Project

Subject : Quotation for Rolling Shutter,Dock Leveller,Sliding Gate etc.

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	4

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**MS Motorised Rolling Shutter**	5000	5000	3	198,000	594,000	20,000	60,000
2	**MS Gear Operated Rolling Shutter**	5000	5000	2	161,000	322,000	20,000	40,000
3	**2 Hrs Fire Rated Rolling Shutter**	5000	5000	1	378,626	378,626	20,000	20,000
4	**NIHVA make Dock Leveller - 6 Ton**	2000	3000	2	225,000	450,000	20,000	40,000
5	**NIHVA make Dock Leveller - 9 Ton**	2200	3000	1	25,000	25,000	20,000	20,000
6	**NIHVA Make High Speed Door**	5000	5000	1	380,000	380,000	20,000	20,000
7	**Overhead Sectional Door**	2500	3000	3	386,500	1,159,500	20,000	60,000
8	**Retractable Dock Shelter**	3400	3500	3	155,000	465,000	20,000	60,000
9	**Motorised Sliding Gate**	10000	1600	1	522,000	522,000	20,000	20,000
10	**Manual Wicket Gate**	1550	1600	2	25,000	50,000	10,000	20,000
11	**2 Hrs Fire Rated Rolling Shutter**	2500	3000	1	155,000	155,000	20,000	20,000
				Total		**4,501,126**		**380,000**
12	P&F Charges			3%		**135,034**		
	Total Without Taxes					**4,636,160**		**380,000**
	GST Extra @ 18%			18%		834,509		68,400
	Total With Taxes					**5,470,669**		**448,400**
13	Transportation Charges					**Extra at Actual**		
14	Unloading Charges @ Site					**In Client Scope**		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

M S Motorised Rolling Shutter

Sr .No.	Specification	Motorized Rolling Shutter
1	**Description:**	Motorised Rolling Shutter with MS Laths with thickness of 1 mm.
2	**Mounting Location area**	Inside area / Outside area
3	**Mounting Surface**	Side Brackets: Optional = On Concrete /Steel & Side
4	**Curtain Panel**	The panel made of 1.0mm thick MS.
5	**Curtain panel size**	75mm wide
6	**Curtain Profile**	Curved
7	**Bottom Profile**	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
8	**Side Guide Profile**	M.S." U" Shaped profile 65 mm -150 mm x 3 mm thick (as per the opening width dimension)
9	**Roller Shaft**	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
10	**Side Brackets**	MS Plate 3 mm to 10 mm thick, as per the opening dimension.
11	**Hood Cover**	Made of GI Sheet Thickness 0.9 mm GF mm with 25x25x3mm angle stiffener
12	**Surface finish**	PU paint or Powder coated
13	**Drive Unit & Mounting Type**	Indirect Drive, Electric Motor - Direct Mounting - Sprocket chain arrangement – IP54 Protection

Gear Operated Rolling Shutter

Sr .No.	Specification	MS Gear Operated Rolling Shutter
1	**Description**	Gear Operated Rolling Shutter with MS slats with thickness of 1 mm.
2	**Mounting Location area**	Inside area / Outside area
3	**Mounting Surface**	Side Brackets: Optional = On Concrete
4	**Curtain Panel**	The panel made of 1.0mm thick MS.
5	**Curtain panel size**	75mm wide
6	**Curtain Profile**	Curved
7	**Bottom Profile**	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
8	**Side Guide Profile**	M.S." T" Shaped profile 65 mm -150 mm x 3 mm thick.
9	**Roller Shaft**	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
10	**Hood Cover**	Made of GI Sheet Thickness 0.9 mm GF mm
11	**Surface finish**	2 Coats (each coat of 35 microns DFT) of EPOXY polyamide-based enamel finish of approved color and make over a Coat (each one coat 25 microns DFT) of EPOXY polyamide based red
12	**Operation**	Gear Assembly.

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

Fire Rated Rolling Shutter

Sr .No.	Specification	Fire Rated Rolling Shutter
1	Certification	• BS 476 Part 22 & MS 1073 Part 3 1988 • Tested in Warrington Fire Reasearch Centre UK & Sirim Malasiya
2	Test	UL - 10B Tested
3	Shutter Slats	Zinc coated steel solid slats
4	Shutter Curtain	Roll formed from 1st grade BHP Zincalume steel SKB-A7 curve slat curtain
5	Guide Rail	Fabricated from hot-dipped galvanised steel of 3.0 mm with one piece design surface mounted type.
6	Bottom Bar	Assembled of 2 Pieces of 38 x 38 x 3 mm galvanised steel angle bolted 800 mm pitch with galvanised bolts and nuts or 2 pieces of 40 x 40 x 6 mm steel flat bar.
7	Shutter Enclosure Box	Pressed Galvanised steel sheet to suite box size comply to fire test approved thickness.
8	Operation Control	Gear motor with Thermal protector, limit switches, manual overide, c/w push button switch with keys lockable.
9	Motor Drive Unit	Power Source: 110v 60Hz 1 phase 220v 6OHz 1 phase 230v 50Hz 1 phase 400v 50Hz 3 phase Manual Chain Override One unit push button switch Gravity drop level Auto close by relay switch after receive of 24vdc fire signal
10	Fire Mode	Fire Shutter will auto close via upon receiving of 24VDC fire signal

Motorised Single Leaf Sliding Gate

Sr. No.	Description	Specifications
1	Opening Direction	Horizontal - from left to right or reverse
2	Mounting Location area	Inside area
3	Design Pattern	Standard Tubular Design Pattern
4	OUTER TUBE	72 x 72 x 3.2mm MS SQ. TUBE
5	FOR POST	72 x 72 x 3.2mm MS SQ. TUBE
6	INNEAR TUBE	38x38x3.20mm/40x40x3.2 MS SQ. TUBE
7	Gap Between Tubes	125mm
8	Bottom Rail on ground	Dia 20 mm round bright bar with heavy duty support ISMB 100 X 50 Beams
9	Bottom Rollers	Heavy Duty Bottom Wheel With both side Bearings (chorme plated)
10	Guide Rollers supporter during Gate movement	Nylon Rollers with Bearings both side mounted on column for support smooth movement of gate
11	Painting	2 Coats of EPOXY polyamide based enamel finish of approved colour
12	El motor make	BFT – Italy (100% imported)
13	Emergency Operation	Manual after turn the switch
14	Operating Switch	Push Button from inside
15	Safety	Photocells, Flashing Light
16	Accessories	Remote included

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

Nihva Make Dock Leveller

Sr. No	Description	Specifications
1	Capacity	9 Ton / 6 Ton
2	Dock operation mode	AC power pack hydraulically operated
3	Lip operation mode	Hydraulic
4	Operation control	Through panel
5	Loading platform height from road	1250mm
6	Travel above & below dock level	(+) 300 safe working height(+900 mm) / (-) 250 mm
7	Platform Size (W x L)	2200 mm x 3000 mm
8	Lip size (W x L)	2200 x 400 mm
9	Shut Height	480 mm
10	Overall length	3000mm + Lip Length (400mm)
11	Clear Pit dimensions (W x L x D)	(W) 2250mm x (L) 3000 mm x (D)480 mm
12	Hydraulic power pack	Standard
13	Driver type	Direct by electric Motor
14	Motor Ratings	1 H.P
15	Pump design flow	2.5 LPM
16	Pump pressure	120 bar Operating 200 bar Max.
17	Safety valve set pressure	120 Kg/cm²
18	Pump Type	Gear
19	Volume of oil receiver	7 Lit
20	No Of Deck cylinder	2 No
21	Lip Cylinder	1 No
22	Structure	Included
23	Maximum slope can be achieved	10%
24	Dock Bumper	Pair of Dock Bumper

NIHVA ASSA ABLOY Sectional Door


Sr. No	Description	Specifications
1	**Model No**	OH1042P
2	**Opening Direction & Mounting**	Vertical
3	**Door produced Based on which certification**	Doors produced according to ISO 9000 or ISO 14000 certified.
4	**Opening/Closing Speed**	0,28 m/s
5	**Door Material**	GI Steel
6	**Panel Thickness**	44 mm
7	**Door sealent**	All door sealants made of EPDM rubber, temperature resistant -30/+70
8	**Water Penetration**	EN 12425 class 3
9	**Air Permealibity**	EN12426 class 3
10	**Wind Load**	EN21424 class 3
11	**Thermal Transittance**	6 W/m2K
12	**Bottom sealing**	Bottom of the door to be equiped with three lip sealing made of oil resistant EPDM rubber
13	**Emergency Operation**	Single phase 230V direct drive on shaft
14	**Operating Switch**	by Disengagement rope manual
15	**Environmental Green Product DeclarationCertification**	Up/Down Keypad + stopbutton
16	**Drive Unit & Mounting Type**	as per ISO 14025 and EN 15804
17	**Door Safety**	Doors equiped with spring break device; Safety Photo cell, bottom safety edge, rope break mechanism etc.

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Make High Speed Door

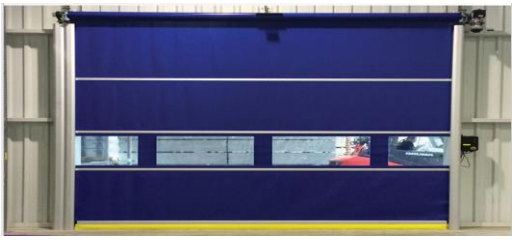

- Safe & for continous operations
- Self Supporting Construction with anti crash protection system for bottom profile
- Smooth & silent opening & closing
- Can be equipped with full vision PVC curtain
- Modular Interchaegable panels permit to replace worn & damged panels

Sr. No	Description	Specifications
1	Use	Internal Door
2	Speed	Inverter Motion system to adjust different speeds, with progressive control of acceleration & deceleration during braking
3	Opening speed	3 m/s
4	Closing speed	0.8 m/s
5	Control Panel	4 Push Button operated
6	Security Features	EN 13241-1 Standard
7	Resistance to wind load	EN12424 upto class 2
8	Curtain	Fabric Transparent PVC section
9	Guide Material	Aluminum
10	Hood Cover	GI
11	Motor Cover	GI
12	Operator & Control	German Make Motor
13	Connecting Voltage	220V , 1Ph , N
14	Open-Stop-Close Button	Standarad
15	Protection Category	IP 54 / IP 65
16	Power Consumption	0.75 kw Motor
17	Emergency Off Button	Standard
18	Closing Zone Monitoring	Optical Safety edge
19	External Route Monitoring	Photocell
20	Emergency Opening	Crank Handle

Retractable Dock Shelter

Sr. No	Description	Specifications
1	**Size**	(W) 3400 mm x (H) 3500 mm
2	**Top Curtain**	1000 mm
3	**Side Curtain**	600 mm
4	**Curtain colour**	Black
5	**Parking Guides**	White, Yellow
6	**Wall Fixings**	Concrete, Sandwich light Concrete, Load house cavity, insulated panel
7	**Top & Side Curtaiins**	Double Layer High Quality Polyester
8	**Thickness**	3.0 mm
9	**Weight**	Approx 3400 g/m2

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: **Please find below List which are in Client Scope**

Sr. No	**Description**
1	Secured and fully covered Store area to keep the material
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site
3	Electrical Supply on the site single phase/three phase points at different places.
4	Any civil structural work required
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.
7	Conduits, Cables required

D) Terms & Conditions

Price	: Ex Works Pune
Delivery	: 7 -8 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval. For Sectional Doors 12-14 weeks from the date of receipt of confirmed PO, Advance Payment & Drawing Approval.
Payment	: 80% Advance along with Confirmed Purchase Order & Balance against readyness of material before dispatch.
Validity	: Validity of Offer is 15 days from the date of quotation
Warranty	: 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr.Ravindra Kharat on 7410169333 .**

With Best Regards
Smita Khare
9637991333
For NIHVA Technologies Pvt Ltd