Order Name / No. :

Order Date :

PERGOSTYLE
X-Roof Order Form

Company Name :

Quantity :

DIMENSIONS

W - Total Width ..... cm

or ☐ P - Projection ..... cm

☐ N - Nr. Of Louvres..... pcs

or ☐ H_1- Height Under Rafter..... cm

☐ H_2- Top Height ..... cm

Total Number of Posts required ..... pc

Note:H_2- H_1 = 34 cm

INSTALLATION TYPE

☐ Self Standing ☐ Wall Installation

☐ Type-a ☐ Type-a

☐ Type-b ☐ Type-b

☐ Type-c

☐ If systems are multiple and each system is in different width & projection ,please provide details (max. width for single system is 450 cm, max. projection for single system is 812 cm) and additional post is required after 6 meters of projection.

W1 ..... cm P1 ..... cm

W2 ..... cm P2 ..... cm

POWDERCOAT COLORS (STRUCTURE)

Standart Color

☐ Antharacite ON617

☐ Antharacite OGN35

Ral Colors

☐ RAL 9005

☐ RAL 9016

☐ RAL 1013

☐ RAL 9006

☐ RAL 7016

☐ Other RAL .....

Exclusive Colors

☐ Antharacite ON611

☐ RAL 7039 ST

☐ RAL 7016 ST

☐ RAL 8019 ST

☐ RAL 9010 ST

☐ RAL 9001 ST

☐ RAL 1013 ST

POWDERCOAT COLORS (LOUVRES)

Standart Color

☐ Antharacite ON617

☐ Antharacite OGN35

Ral Colors

☐ RAL 9005

☐ RAL 9016

☐ RAL 1013

☐ RAL 9006

☐ RAL 7016

☐ Other RAL .....

Exclusive Colors

☐ Antharacite ON611

☐ RAL 7039 ST

☐ RAL 7016 ST

☐ RAL 8019 ST

☐ RAL 9010 ST

☐ RAL 9001 ST

☐ RAL 1013 ST

OPTIONALS

LIGHTING

☐ (SL) Soft Led Lighting Dimmer System

☐ (CW) Cold White (6000K-6500K)

☐ (WW) Warm White (3000K-3200K)

☐ (RGB) RGB Led Lighting System

AUTOMATION (IO)

☐ IO

☐ Situo 1 IO Pure .....pc

☐ Situo 5 IO Pure .....pc

☐ Smart Control

☐ Nina IO .....pc

☐ Tahoma New Box .....pc

☐ Connexoon Box .....pc

☐ Drainage Pipe

☐ (IF) Insulation Foam


PACKACING REQUIREMENTS


☐ Only Bubble Wrap (Standart Packing)

☐ Bubble Wrap & Wooden Pallet**


**Extra cost charge

☐ **ADDITIONAL NOTES & DRAWINGS ATTACHED .....**

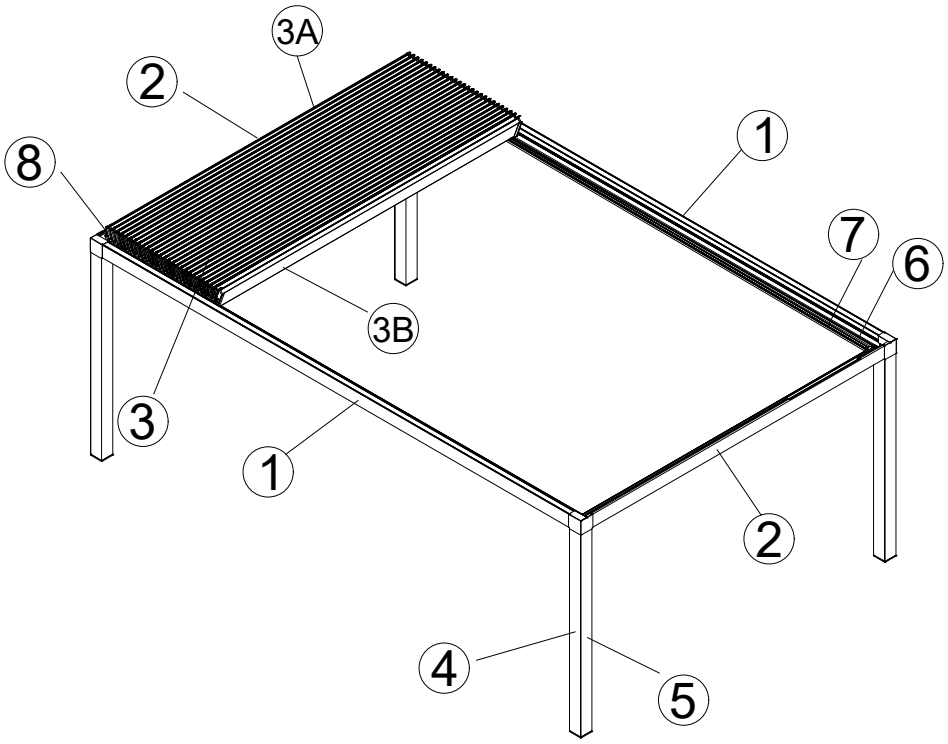





① Rafter




② Gutter




③ Louvre




3A Back Louvre



3B Front Louvre




④ Post




⑤ Post Cap



⑥ Lighting Adaptor Profile




⑦ Lighting Stripe Profile





⑧ Motor Cover Profile

One System (W) 100 cm > 450 cm

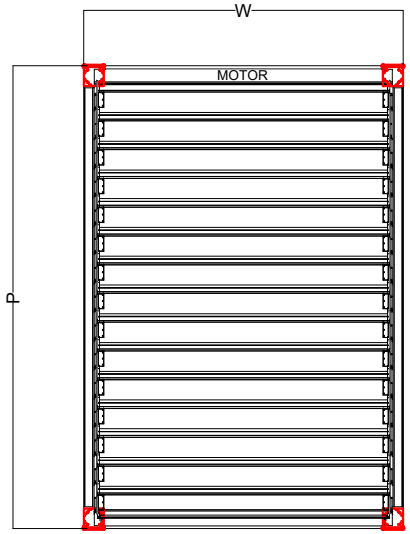

Free Standing-a

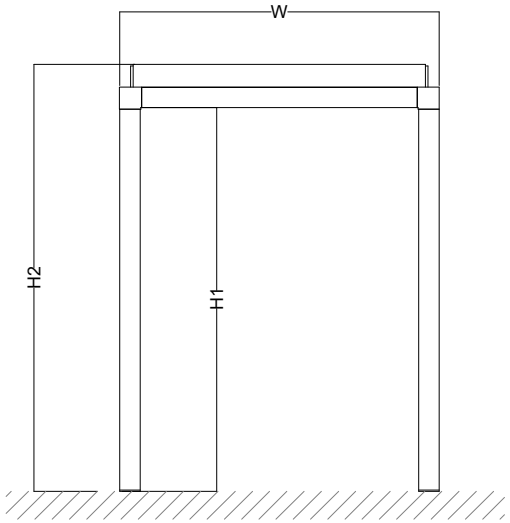


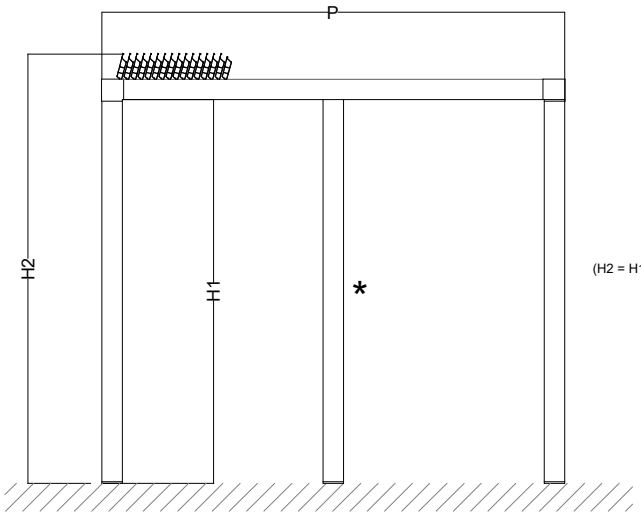


(max. 812cm)

Additional column needed if p>600 cm


Multiple Systems (W)

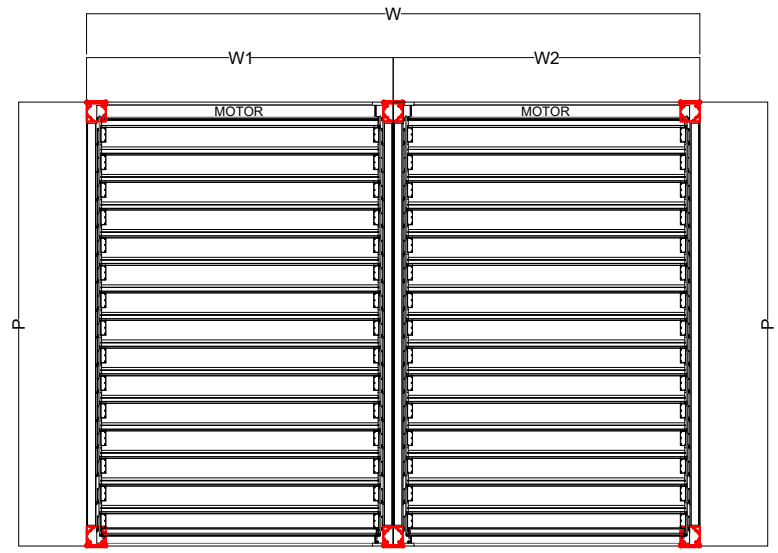

Free Standing-b

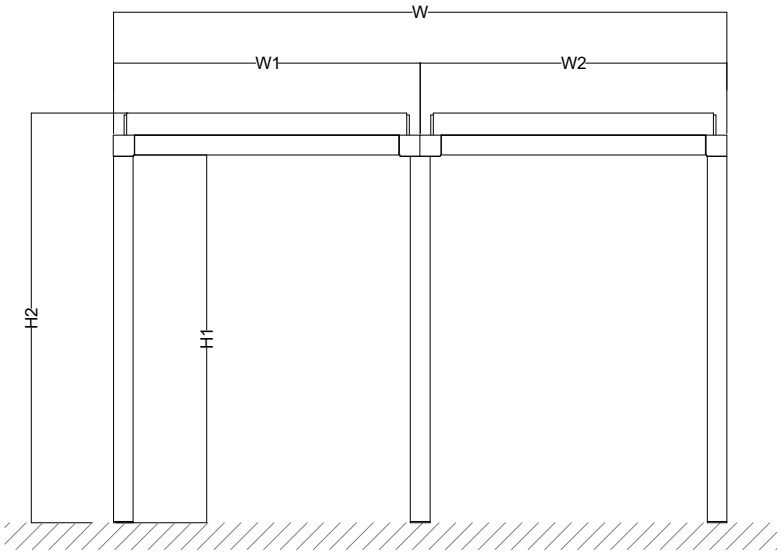


(max. 812cm)
Additional column needed if p>600 cm

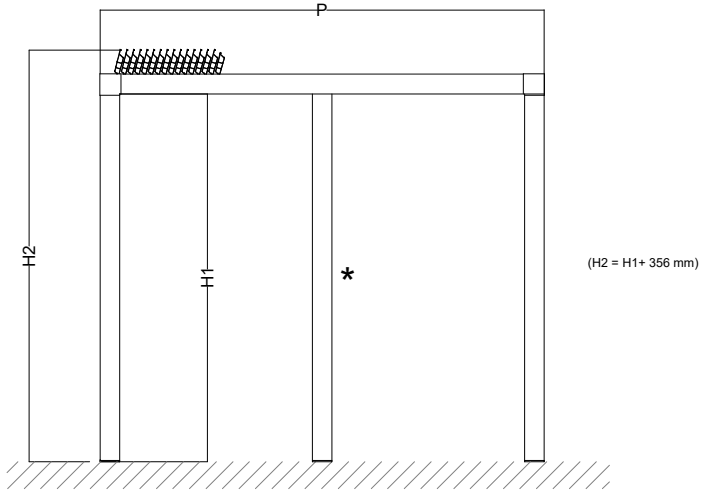



(max. 812cm)

Multiple Systems (P)

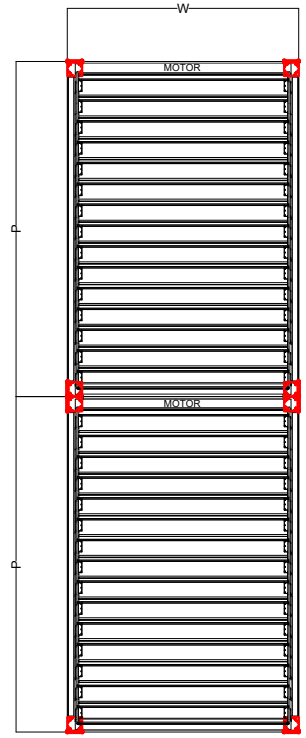

Free Standing-c

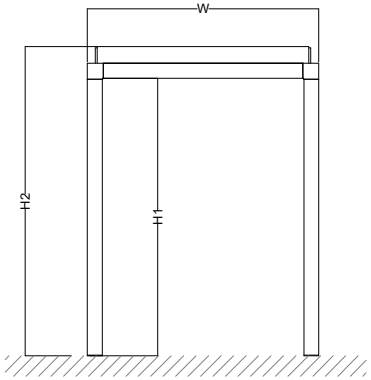


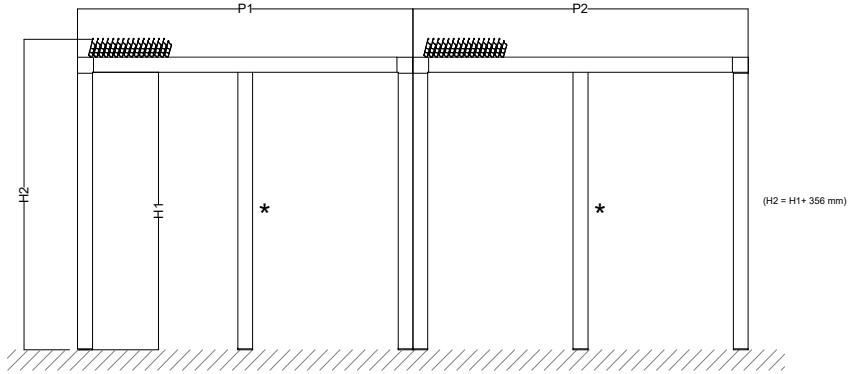


(max. 812cm)
Additional column needed if p>600 cm


(max. 812cm)
Additional column needed if p>600 cm

One System (w) 100 cm > 450 cm

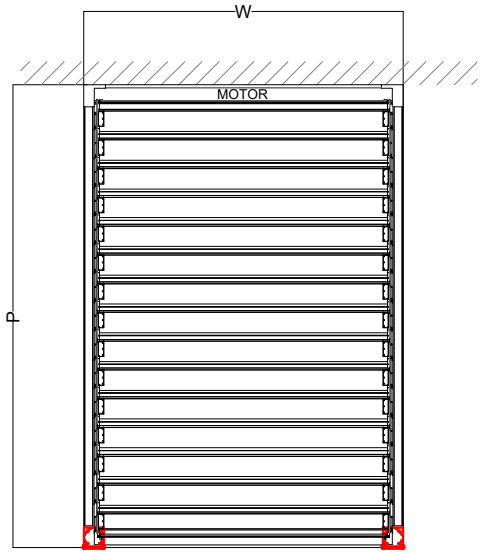

Wall Installation-a

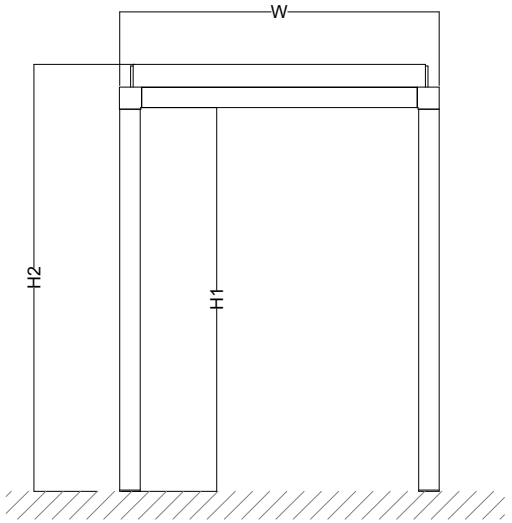


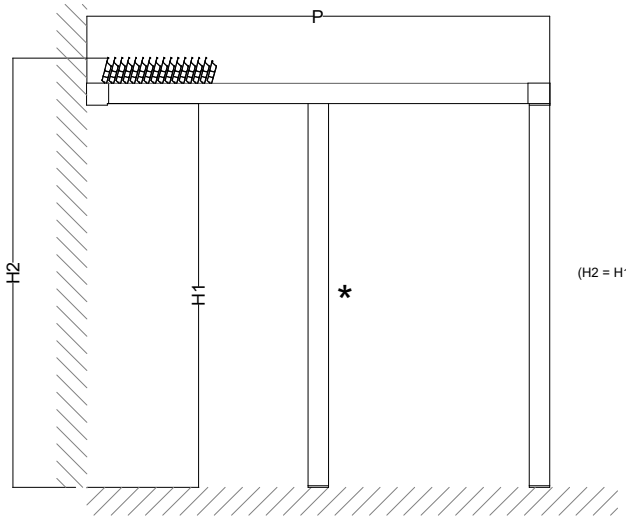


(max. 812cm)


Additional column needed if p>=600 cm

One System (W) 100 cm > 450 cm

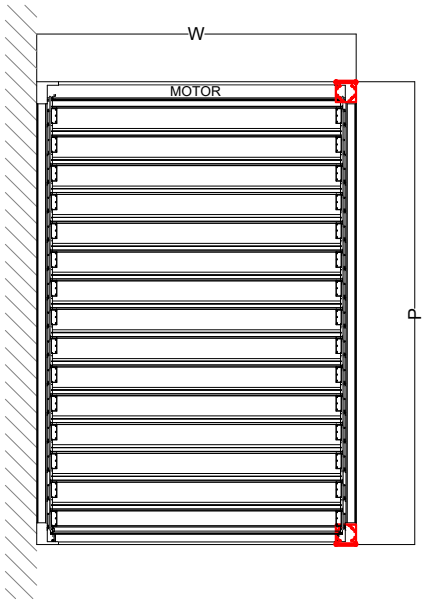


Wall Installation-b

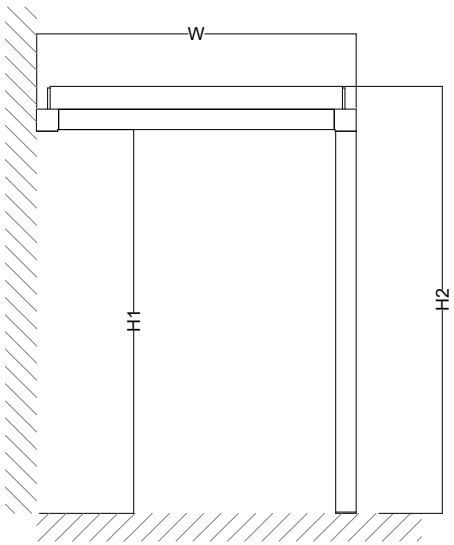


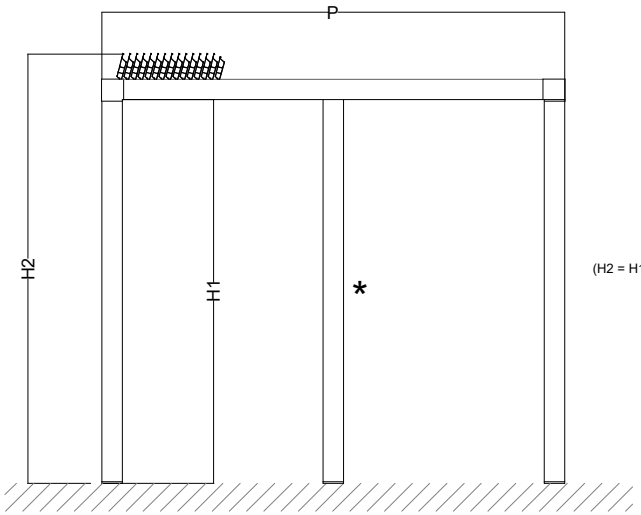



(max. 812cm)


Additional column needed if p>=600 cm

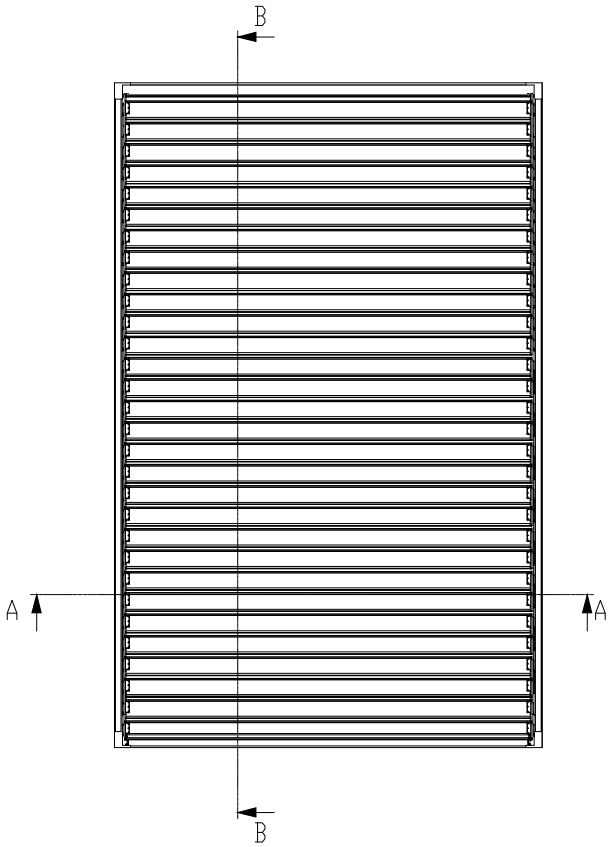

B
A
A
B

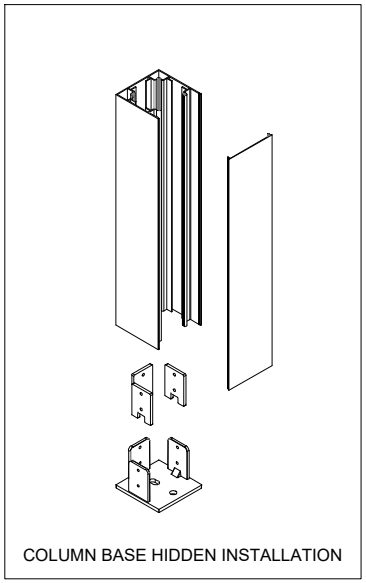
COLUMN BASE HIDDEN INSTALLATION

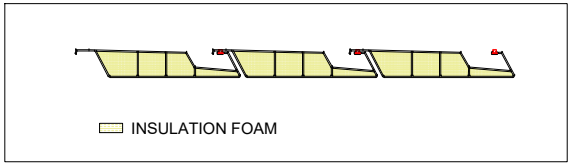
INSULATION FOAM

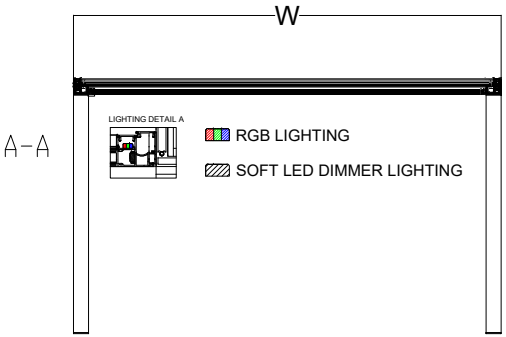
W
A-A
LIGHTING DETAIL A
RGB LIGHTING
SOFT LED DIMMER LIGHTING

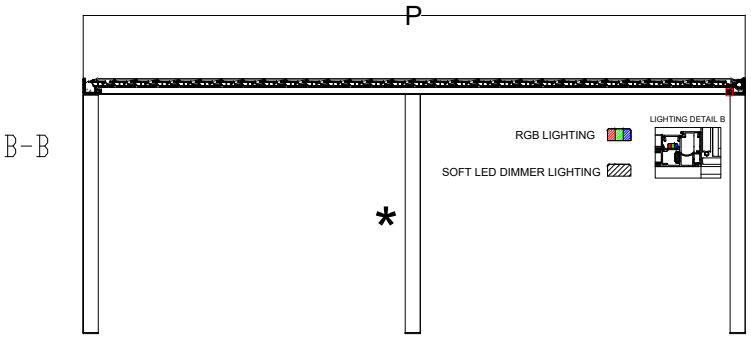
P
B-B
RGB LIGHTING
SOFT LED DIMMER LIGHTING
LIGHTING DETAIL B
*

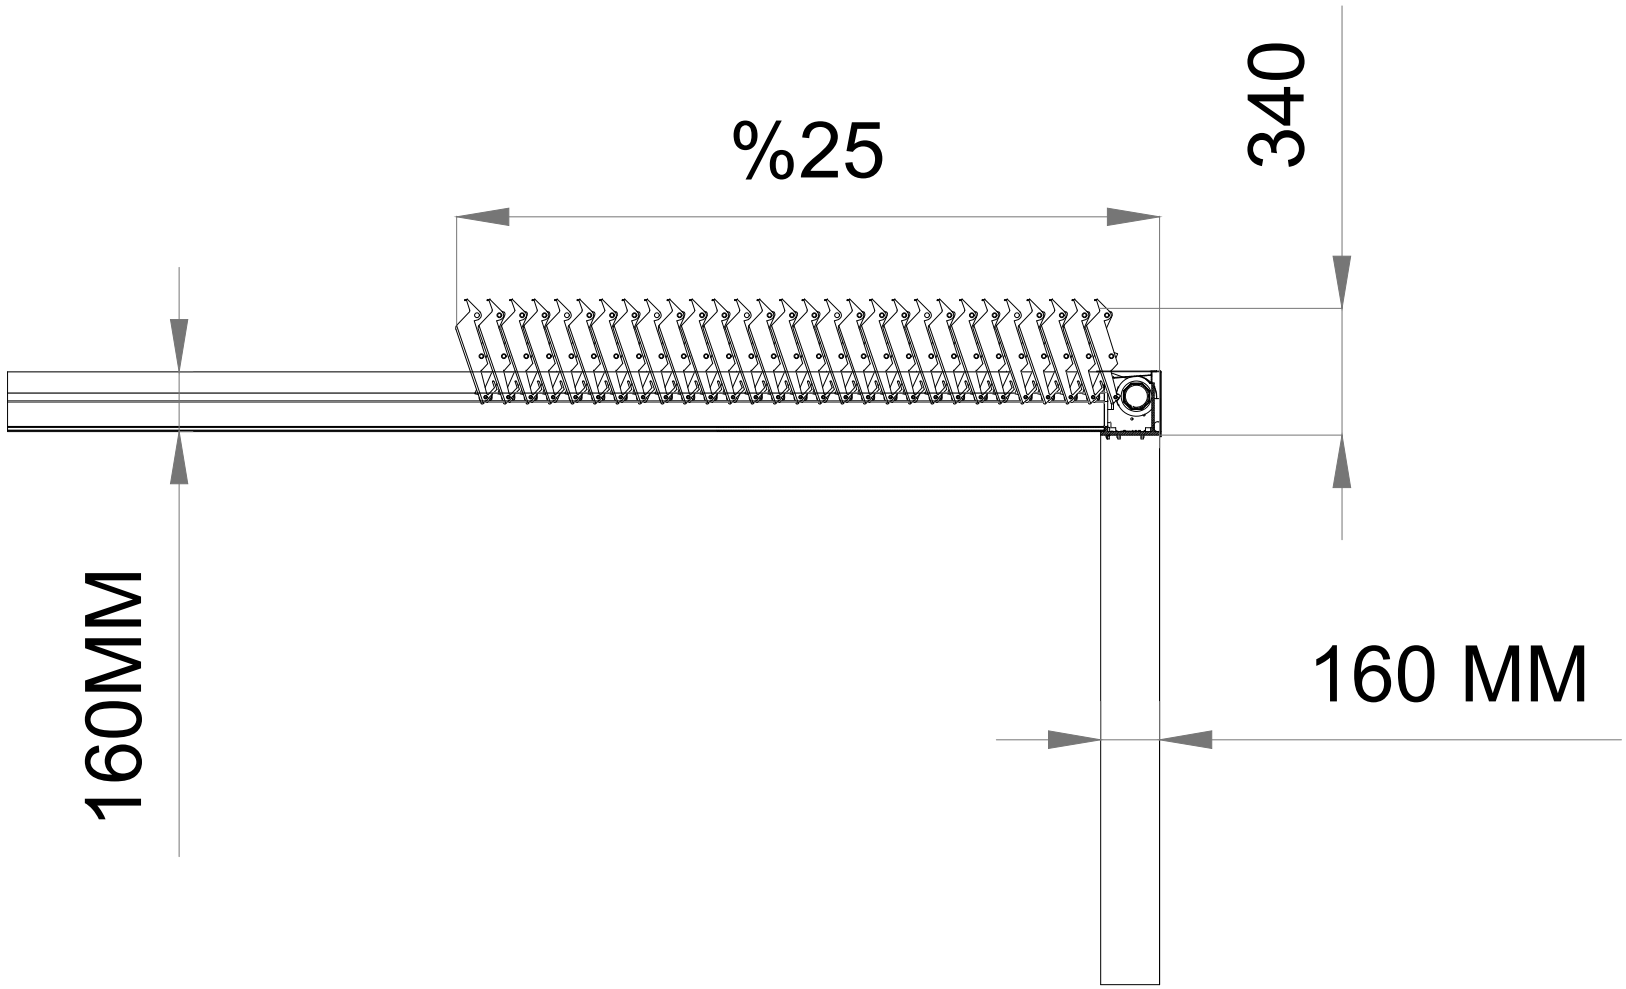
%25
340
160MM
160 MM