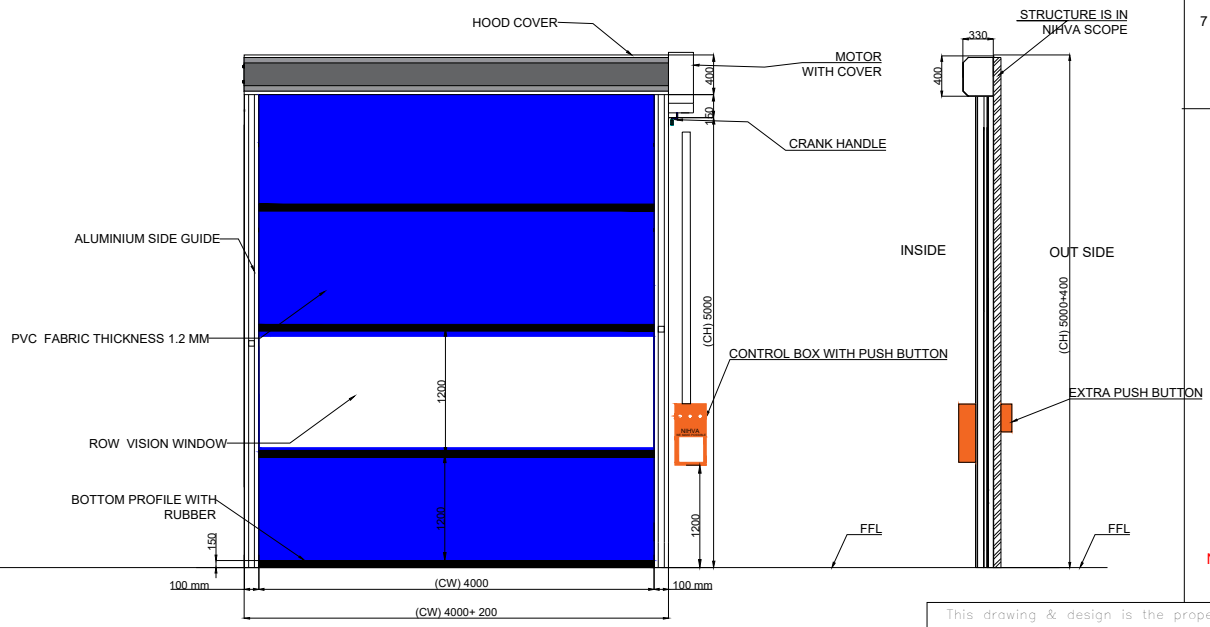


TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	USE	INTERNAL DOOR
2	MOUNTING	ON STRUCTURE: INSIDE
3	CURTAIN PANEL	PVC FABRIC THICKNESS 1.2 MM.
4	MANUAL RELEASE	CRANK HANDLE
5	DOOR TRAVEL SPEED	OPENING: UPTO 1.5M/SEC & CLOSING: 0.8 M/SEC
6	RAL CODE	BLUE
7	ACCESSORIES	1) EXTRA PUSH BUTTON 1NOS 2) PHOTOCELL - 2 PAIR 3) SAFETY EDGE SENSOR FOR BOTTOM 4) MAGNETIC LOOP DETECTOR - 2NOS 5) CONTROL PANEL WITH PUSH BUTTON-1NOS

HIGH SPEED ROLL UP DOOR SIZES :-

SR	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	4000	5000	01

NOTE :-
1. All DIMENSIONS ARE IN MM.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	HIGH SPEED DOOR		
	NAME	SIGN	DATE
DRAWN	J.P		21.11.2025
CHECK	B.S		21.11.2025
APPRD.	V.T		21.11.2025
If any queries contact : Design@nihva.com			
ALL DIMENSION ARE IN mm			

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - JAYASHREE POLYMERS PVT. LTD
PROJECT - HIGH SPEED DOOR DOOR
FORMAT NO - NIHVA-DD-F-03
DWG. NO. : NIHVA/25-26/MP/1308001 | REV- R00
SCALE: NTS | WT: | SHEET: