

Abbrevation's:
WOW-Wall Opening Width
FW-Frame Width
SW-Shutter Width
WOH-Wall Opening Height
FH-Frame Height
SH-Shutter Height
UC-Under Cut
FFL-Finished Floor Level

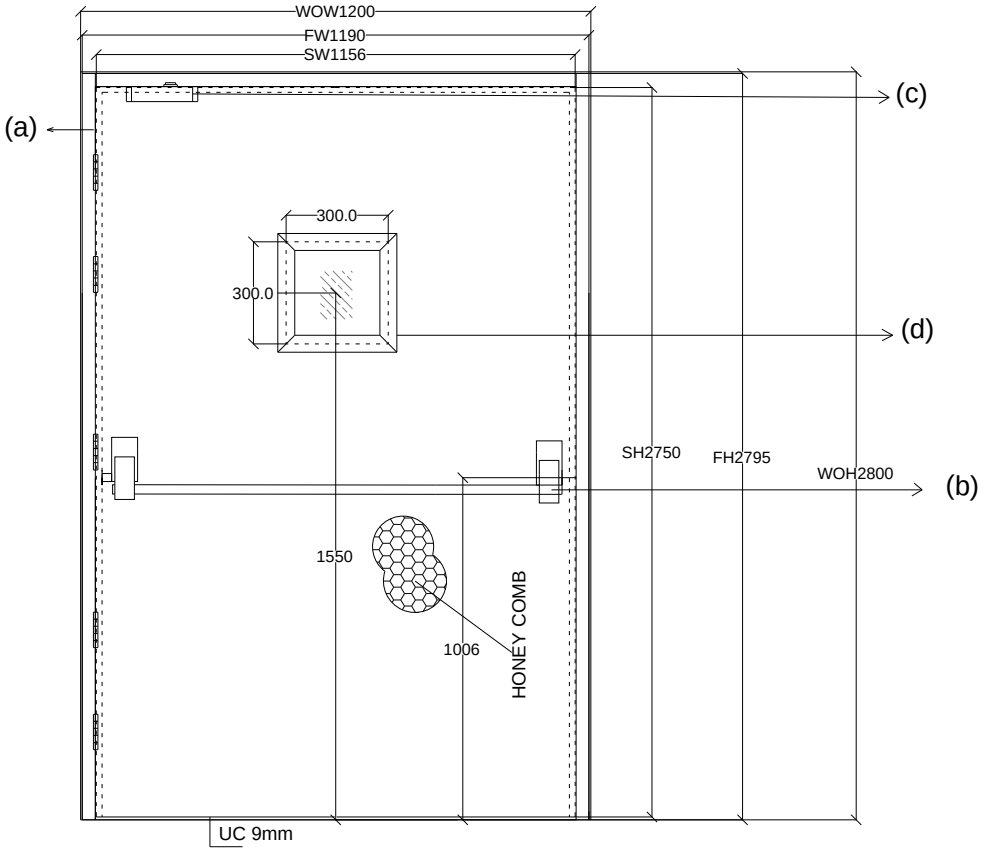



(Trime for CE Panic (CMPA 010) Withe Mortice Lock Half Cylinder)

ASSESORIES DETALES

DOOR QTY : 4 No.

(a) HINGES: 5 No. SS Ball bearing butt hinges 100x75x3mm

(b) LOCK : PHCR 1000 series puch bar (Make Dorma)


(c) DOOR CLOSER: 1 No. Door Colser TS 71 with std arm

(d) GLASS : 1No. Clear fire Vision Glass Clear 6mm of size 350x300mm

(e) FLUSH BOLT : ----------

Shutter thickness : 47 mm
Frame Sheet thick : 0.80mm
Shutter sheet thick : 1.20mm
Fixing : On Soliid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

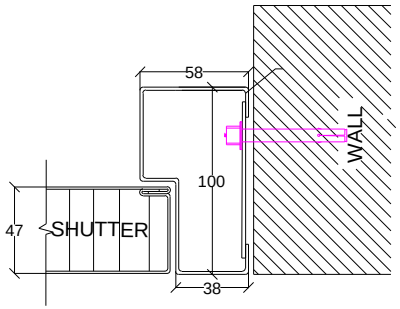

CLIENT : NIHVA TECHNOLOGIES PVT LTD	DRAWN BY : DILEEP KUMAR
PROJECT :	CHECKED BY : XXXXXXXXXXXX
TITLE : 2 Hr Fire Reated Door With Honey Comb Core	D R G. N O. : IHMS/GE2015/ 025 REV 0
	DATE : 12/12/2015
	NOT TO SCALE