

General Drawing RapidNorm MWI



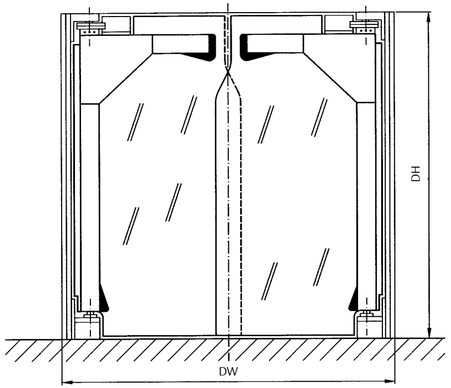

Drawing-No.: 5105 PTTSR
Drawing-Date: 16.12.2004

Magnetic hold open device RapidNorm MWI

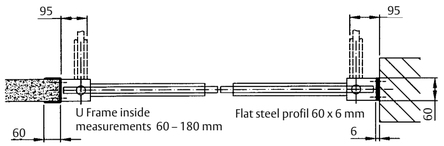


Drawing-No.: 5115 a
Drawing-Date: 06.11.2003

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our worldwide presence we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations. ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

www.assaabloyentrance.com

Product Features RapidNorm MW - SW - MWI





SIDE FRAMES
The door profiles are available in galvanised steel or stainless steel. The door frame profiles are available as Flat Steel, U Profiles or Stepped profiles. Other designs are also available upon request.

DOOR LEAVES
For individual applications different door leaves are available.

You can choose between the following door leaves:

Plast: transparent door leaf
Net: transparent door leaf with hightly trear-resistant special fabric net inlay
Top: door leaf with integrated colour fabric inlays and integrated windows or vision panels
Plast-K: transparent PVC door leaf for cold stores, temperature resistant from - 40 to + 40° C.

PROTECTION STRIPS/WARNING STRIPS
For swing doors with heavy duty e.g. trolly application, protection strips are available to reinfore the door leaves. Additional warning strips for visually identifying the transparent door leaves are available as option.

FASTENING LATCHES
Fastening latches are available to keep the swing door in position „open“.

ASSA ABLOY Entrance Systems
Albany Door Systems

www.albanydoors.com

QR-Code
Get further informations by scanning the QR-code with your smartphone and a appropriate application.

64 05 K 0902 I 13 J04 EN Technical data subject to change without notice © ASSA ABLOY Entrance Systems AB. All rights reserved.

RapidNorm MW - SW - MWI
Swing Doors

Technical data sheet

ASSA ABLOY, the global leader in door opening solutions



Swing Doors RapidNorm MW - SW - MWI



Swing Door MW



Swing Door SW



Swing Door MW and MWI

Swing doors offer value at an economical price. They improve the work place environment by preventing draughts from outside. They reduce energy costs.

TECHNICAL DATA

	RapidNorm MW	RapidNorm SW	RapidNorm MWI
Interior door	suitable	suitable	suitable
DW max.	3000 mm	5250 mm	3000 mm
DH max.	3000 mm	5250 mm	3000 mm
Surface			
Side frame	galvanised steel	galvanised steel	stainless steel
Frame thickness	2,5 mm	3,0 mm	2,0 mm
Curtain			
plast 7;10 mm	•	•	•
net 7;10 mm	•	•	•
top 6,5; 8,5 mm */**	•	•	•
top 10 mm */**	•		
* with windows	•	•	•
* with vison panels	•	•	•
plast-k 7 mm	•	•	•
protection-/warning-strips	•	•	•
Opening angle	both sides 90°	both sides 90°	both sides 90°
Side frame			
flat steel (mm)	✓ 60 x 6	✓ 80 x10 (DW < 3750mm) ✓ 100 x10 (DW > 3750 mm) ✓ 100 x10 (DH > 4500 mm)	✓ 60 x 6
U-profile (mm)	• 80 x 45 x 6	• 80 x 45 x 6	
Stepped profile (mm)	✓ 110 x 20	✓ 165 x 20	✓ 110 x 20
	(up to DW = 3500 x DH = 3500 mm)		
U Frame (mm)	• 60 – 180		• 60 – 180
	Other side frames on request!		

• Option ✓ Standard

APPLICATION

SWING DOOR MW
Galvanised steel version for normal use.


SWING DOOR SW
Heavy industrial version, made of galvanised steel.


SWING DOOR MWI
Stainless steel version for normal use.


DESIGN
This design allows for the replacement of the door leaf with minimum effort.
All steel parts for model MW and SW are galvanised. The side frames for modell MWI are made of stainless steel. The door leaves are fixed in the side frames by metal clips which are quick and easy to replace.
Plastic corner reinforcements have been mounted on the upper inner corners and the lower outer corners of the door leaf to help prevent tears in these areas that are subject to stress. The side frames are made of flat steel profiles. Optional side frames of galvanised steel are available.
For doors up to DW = 3500 mm and DH = 3500 mm the side frames are also available with a stepped profile and for dowelled joints on the doors.

CLOSING FORCE
Closing equipment with adjustable closing force, integrated in side frame, for opening angel both sides 90o, double hinged, adjustable from the outside.

General Drawing RapidNorm MW

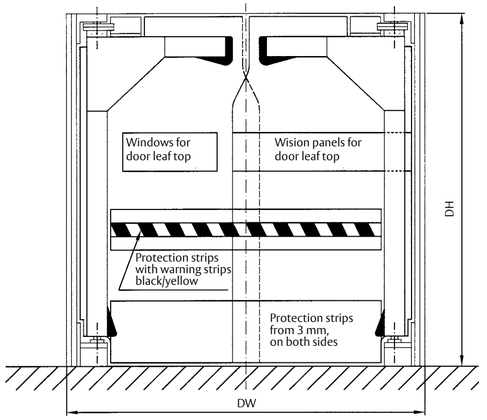


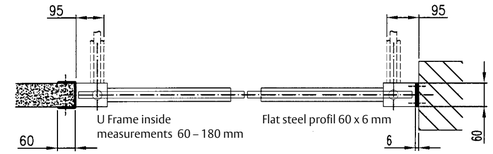

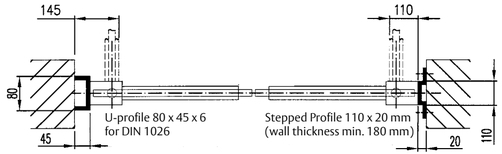


Drawing-No.: 5105 PTTSR
Drawing-Date: 16.12.04


Magnetic hold open device RapidNorm MW

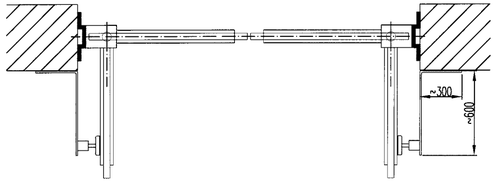


Drawing-No.: 5101 PTET
Drawing-Date: 21.09.06

General Drawing RapidNorm SW

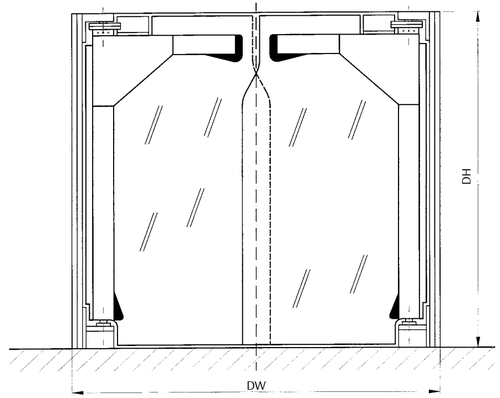


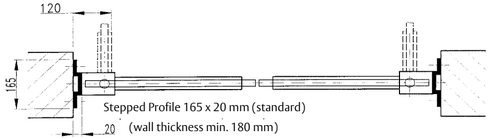


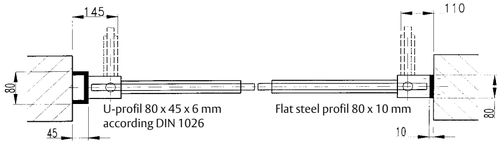

Drawing-No.: 5106 PTTSR
Drawing-Date: 23.01.2004

Hold open device RapidNorm SW





Drawing-No.: 5114 a
Drawing-Date: 06.11.2003